


NPN Transistors

■ Features

- Low saturation voltage
- Large Collector Power Dissipation and Current

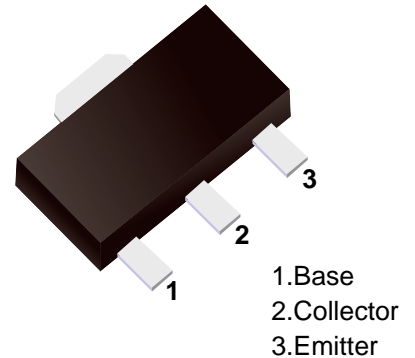

■ Simplified outline(SOT-89)

■ Absolute Maximum Ratings Ta = 25°C









Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V _{CB0}	40	V
Collector - Emitter Voltage	V _{CE0}	30	
Emitter - Base Voltage	V _{EB0}	7	
Collector Current - Continuous	I _c	5	A
Collector Power Dissipation	P _c	750	mW
Thermal Resistance From Junction To Ambient	R _{θJA}	167	°C/W
Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{stg}	-55 to 150	

■ Electrical Characteristics Ta = 25°C


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V _{CB0}	I _c = 100 μA, I _E = 0	40			V
Collector- emitter breakdown voltage	V _{CE0}	I _c = 1 mA, I _B = 0	30			
Emitter - base breakdown voltage	V _{EB0}	I _E = 100 μA, I _C = 0	7			
Collector-base cut-off current	I _{CB0}	V _{CB} = 10 V, I _E = 0			100	nA
Emitter cut-off current	I _{EB0}	V _{EB} = 7V, I _C =0			100	
Collector-emitter saturation voltage	V _{CE(sat)}	I _c =3 A, I _B =100mA			1	V
Base - emitter saturation voltage	V _{BE(sat)}	I _c =3 A, I _B =100mA			1.2	
DC current gain	h _{FE(1)}	V _{CE} = 2V, I _c = 1mA		200		
	h _{FE(2)}	V _{CE} = 2V, I _c = 500mA	230		950	
	h _{FE(3)}	V _{CE} = 2V, I _c = 2A	150			
Collector output capacitance	C _{ob}	V _{CB} = 20V, I _E = 0, f=1MHz			50	pF
Transition frequency	f _T	V _{CE} = 6V, I _c = 50mA		150		MHz

■ Classification of h_{FE(2)}

Type	2SD965A-Q	2SD965A-R	2SD965A-S
Range	230-380	340-600	560-800

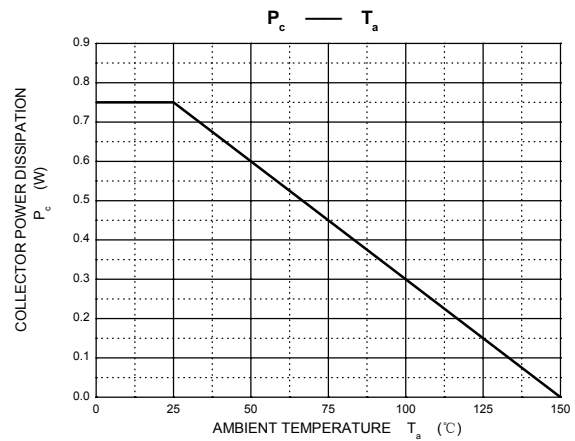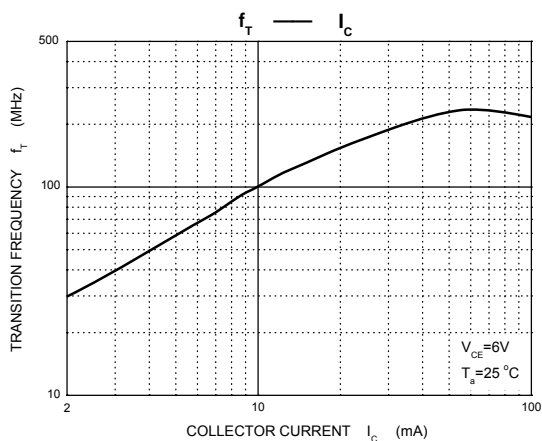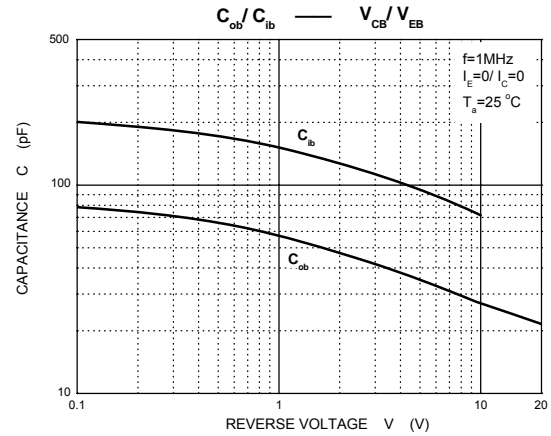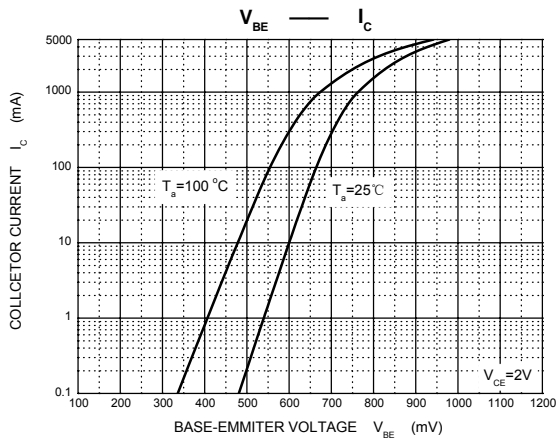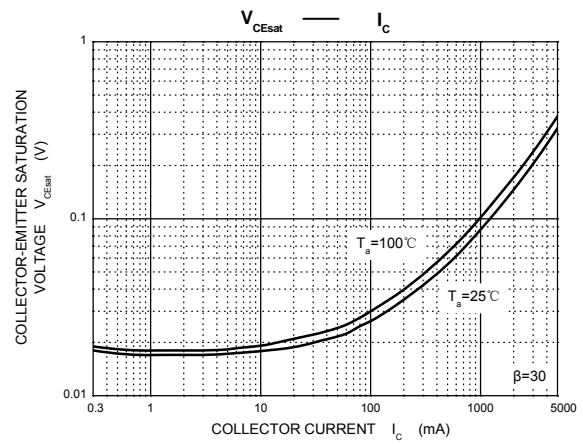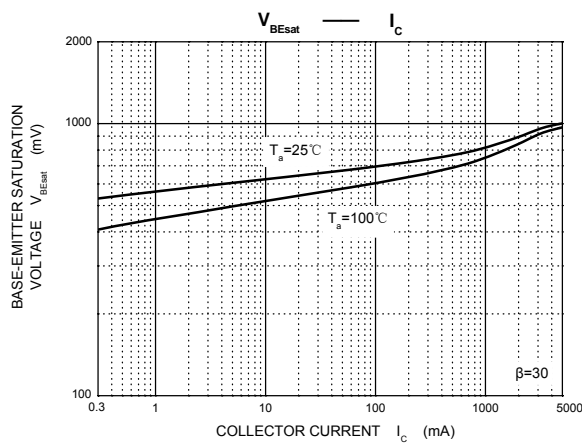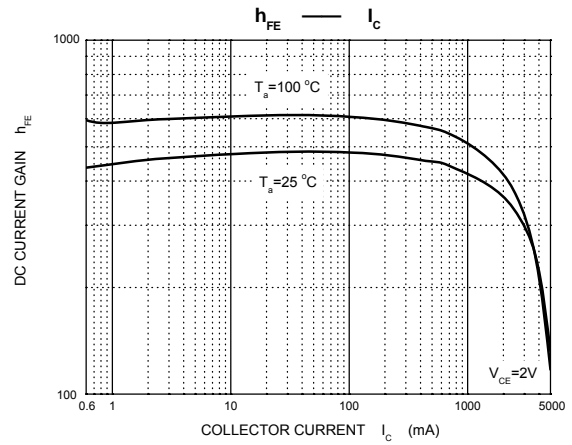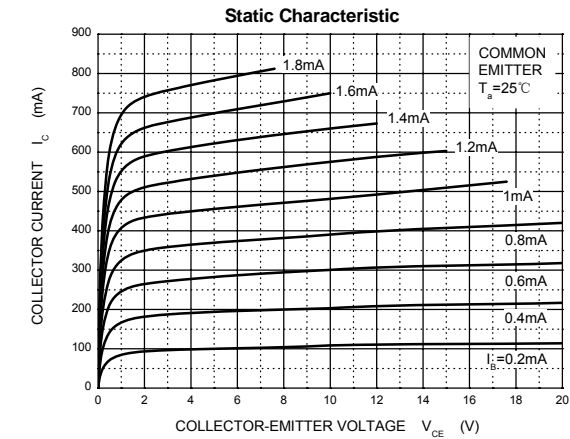

■ SOT-89

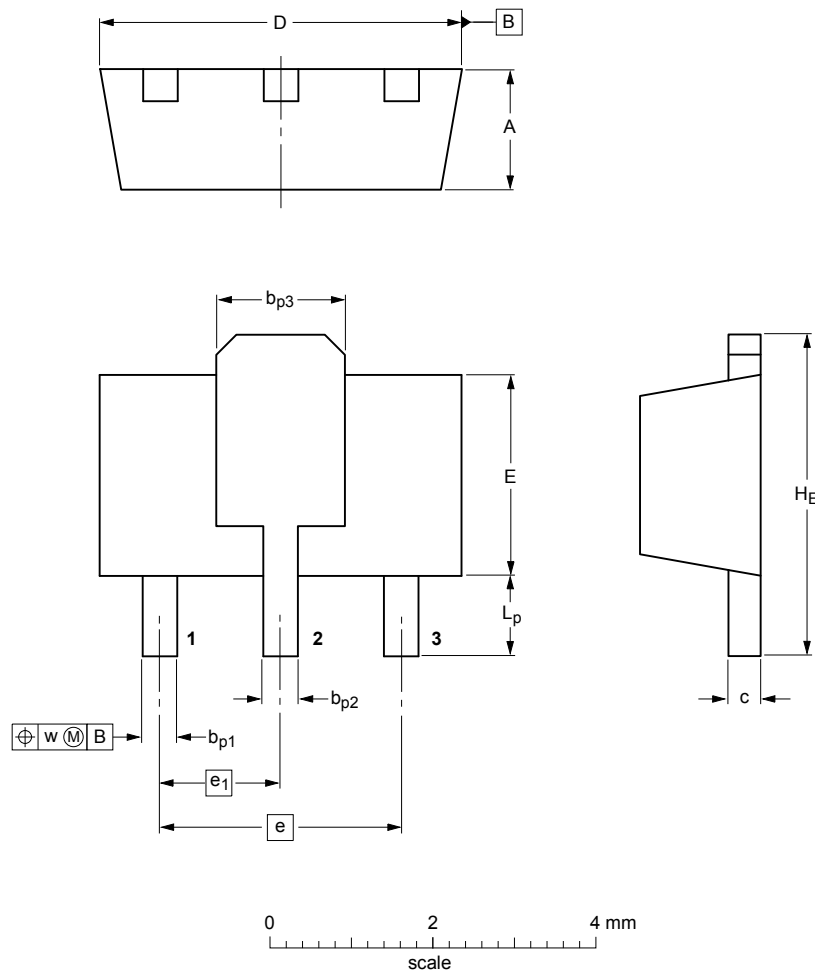

DIMENSIONS (mm are the original dimensions)

UNIT	A	b_{p1}	b_{p2}	b_{p3}	c	D	E	e	e_1	H_E	L_p	w
mm	1.6	0.48	0.53	1.8	0.44	4.6	2.6	3.0	1.5	4.25	1.2	0.13
	1.4	0.35	0.40	1.4	0.23	4.4	2.4		3.75	0.8		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [SLKORMICRO manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)
[MMDT3946FL3-7](#) [2N4240](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#)