


Bridge Rectifiers

- Glass Passivated Die Construction
- Low Forward Voltage Drop
- High Current Capability
- High Surge Current Capability
- Designed for Surface Mount Application
- Plastic Material-UL Flammability 94V-0

- Case:SOPA-4, Mold Plastic
- Terminals:Plated Leads Solderable per MIL-STD-202, Method208
- Polarity:As Marked on Case
- Mounting Position:Any
- Marking>Type Number

ABS

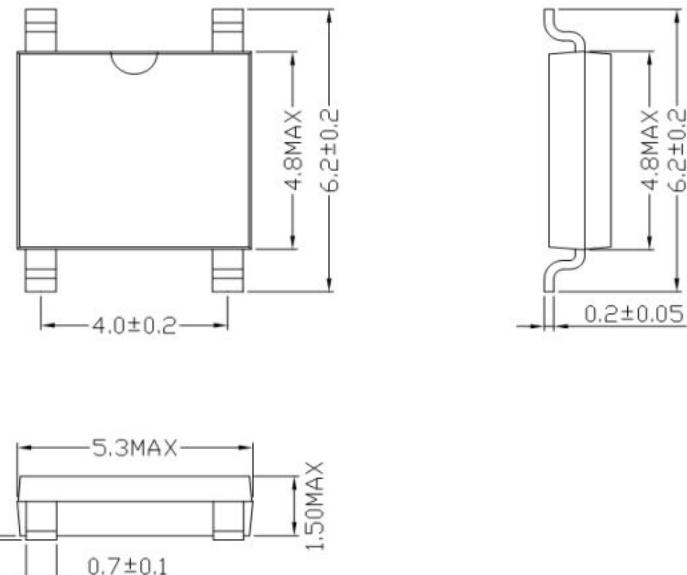

@TA=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	ABS2	ABS4	ABS6	ABS8	ABS10	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	140	280	420	560	800	V
Maximum DC blocking voltage	V _{DC}	200	400	600	800	1000	V
Maximum Average forward output rectified current on glass-epoxy P.C.B on aluminum substrate	I (AV)			1.0 0.8			V
Peak forward surge current 8.3ms single sine-wave superimposed on rated load(JEDEC Method)	IFSM			30			A
Maximum instantaneous forward voltage drop per diode @0.4A	VF			1.0			V
Maximum DC reverse current at TA=25°C rated DC blocking voltage per leg TA=125°C	IR			5.0 500			uA
Typical thermal resistance per leg (Note 1)	R _{θ JA} R _{θ JL}			80 25			°C/W
Operating junction temperature range	T _J			-55 to +150			°C
storage temperature range	T _{stg}			-55 to +150			°C

1. Mounted on glass epoxy PC board with 1.3mm² solder pad.
2. Mounted on aluminum substrate PC board with 1.3mm² solder pad.
3. Measured at 1.0MHz and applied reverse of 4.0V D.C.

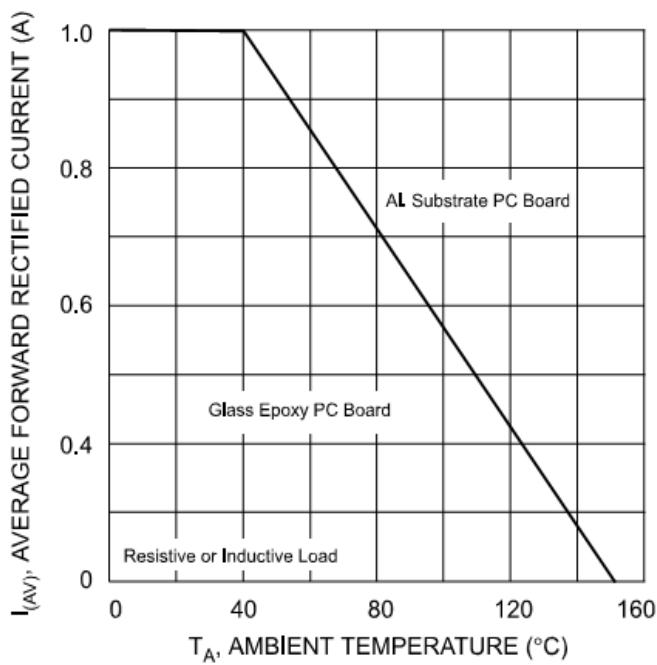


Fig. 1 Output Current Derating Curve

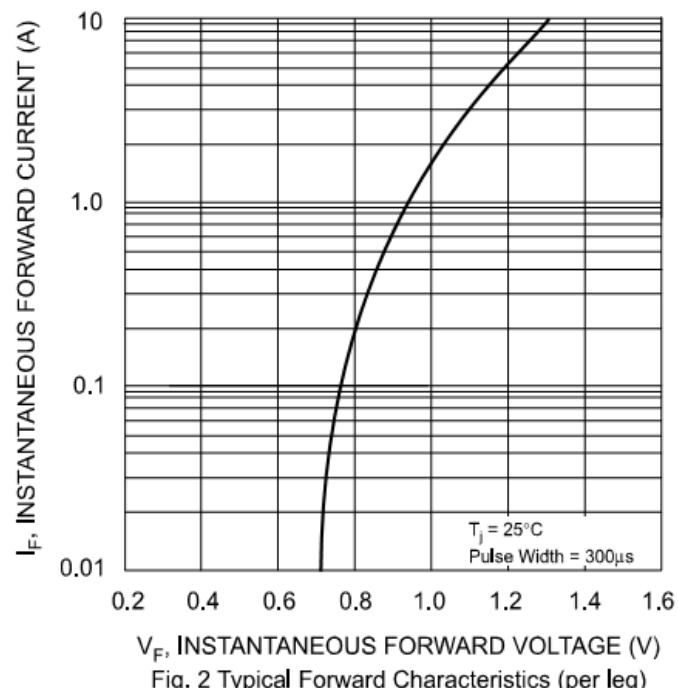


Fig. 2 Typical Forward Characteristics (per leg)

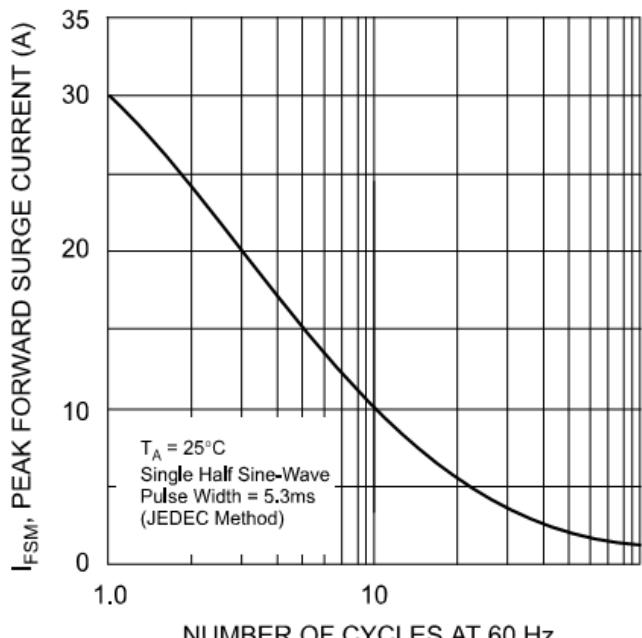


Fig. 3 Maximum Peak Forward Surge Current (per leg)

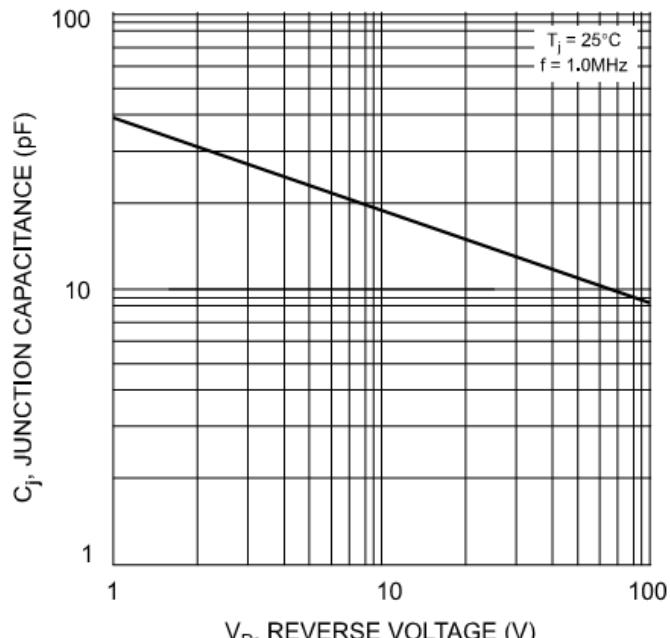


Fig. 4 Typical Junction Capacitance

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [SLKORMICRO](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#)
[GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DBA100G](#) [DBA150G](#) [DBA250G](#) [DBA40G](#) [DBD10G-TM-E](#) [DBF10G](#) [DBF250G](#)
[DBG150G](#) [DBG250G](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#)
[GBU10J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#)
[TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#)