

## -60V/-30A P-Channel MOSFET

### Features


- High density cell design for ultra low  $R_{DS(on)}$
- Fully characterized avalanche voltage and current
- Excellent package for good heat dissipation

### Product Summary


$V_{DS}$	$R_{DS(ON)}$ MAX	$I_D$ MAX
-60V	40m $\Omega$ @-10V	-30A
	50m $\Omega$ @-4.5V	

### Application


- PWM applications
- Power management
- Load switch



pin assignment

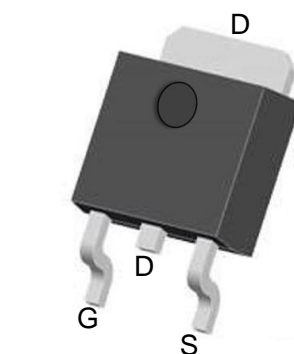

TO-252 bottom view



Schematic diagram

Absolute Maximum Ratings (TA=25°C unless otherwise noted)				
Symbol	Parameter		Rating	Unit
<b>Common Ratings (TC=25°C Unless Otherwise Noted)</b>				
$V_{DS}$	Drain-Source Breakdown Voltage		-60	V
$V_{GS}$	Gate-Source Voltage		$\pm 20$	V
$T_J$	Maximum Junction Temperature		150	$^{\circ}\text{C}$
$T_{STG}$	Storage Temperature Range		-55 to 150	$^{\circ}\text{C}$
$I_S$	Diode Continuous Forward Current	$T_C=25^{\circ}\text{C}$	-30	A
<b>Mounted on Large Heat Sink</b>				
$I_{DM}$	Pulse Drain Current Tested	$T_C=25^{\circ}\text{C}$	-135	A
$I_D$	Continuous Drain Current	$T_C=25^{\circ}\text{C}$	-30	A
$P_D$	Maximum Power Dissipation	$T_C=25^{\circ}\text{C}$	80	W
$R_{\theta JA}$	Thermal Resistance Junction-to-Ambient		50	$^{\circ}\text{C}/\text{W}$

<b>Electrical Characteristics (T<sub>J</sub>=25°C unless otherwise noted)</b>						
<b>Symbol</b>	<b>Parameter</b>	<b>Condition</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
<b>Static Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise stated)</b>						
B <sub>V(BR)DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>D</sub> =-250μA	-60	--	--	V
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> =-60V, V <sub>GS</sub> =0V	--	--	-1	uA
I <sub>GSS</sub>	Gate-Body Leakage Current	V <sub>GS</sub> =±20V, V <sub>DS</sub> =0V	--	--	±100	nA
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =-250μA	-1.0	-1.8	-2.5	V
R <sub>DS(on)</sub>	Drain-Source On-State Resistance	V <sub>GS</sub> =-10V, I <sub>D</sub> =-20A	--	30	40	mΩ
		V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-15A	--	40	50	mΩ
<b>Dynamic Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise stated)</b>						
C <sub>ISS</sub>	Input Capacitance	V <sub>DS</sub> =-30V, V <sub>GS</sub> =0V, f=1MHz	--	2156	--	pF
C <sub>OSS</sub>	Output Capacitance		--	143	--	pF
C <sub>RSS</sub>	Reverse Transfer Capacitance		--	100	--	pF
<b>Switching Characteristics</b>						
Q <sub>g</sub>	Total Gate Charge	V <sub>DS</sub> =-30V, I <sub>D</sub> =-9A, V <sub>GS</sub> =-10V	--	40	--	nC
Q <sub>gs</sub>	Gate Source Charge		--	7	--	nC
Q <sub>gd</sub>	Gate Drain Charge		--	8	--	nC
t <sub>d(on)</sub>	Turn-on Delay Time	V <sub>DD</sub> =-30V, I <sub>D</sub> =-9A, V <sub>GS</sub> =-10V, R <sub>G</sub> =3Ω	--	12	--	nS
t <sub>r</sub>	Turn-on Rise Time		--	14	--	nS
t <sub>d(off)</sub>	Turn-Off Delay Time		--	38	--	nS
t <sub>f</sub>	Turn-Off Fall Time		--	15	--	nS
<b>Source- Drain Diode Characteristics</b>						
V <sub>SD</sub>	Forward on voltage	T <sub>J</sub> =25°C, I <sub>S</sub> =-30A,	--	--	-1.2	V

## Typical Operating Characteristics

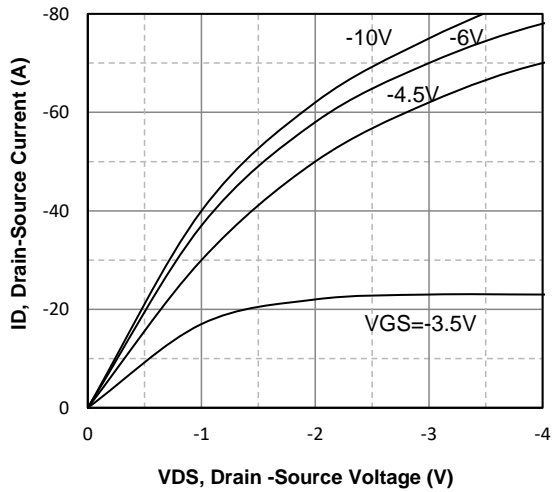


Fig1. Typical Output Characteristics

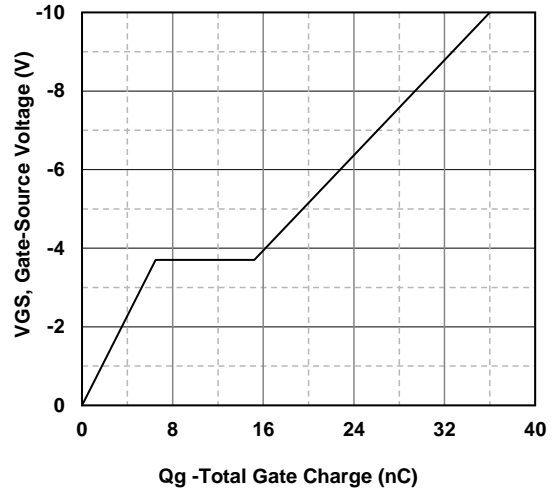


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

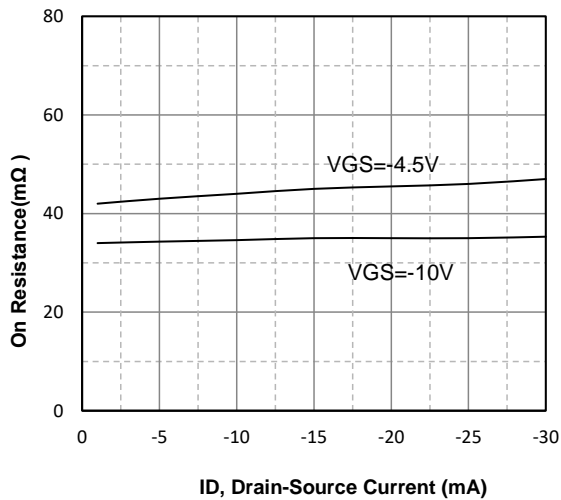


Fig3. Drain-Source on Resistance

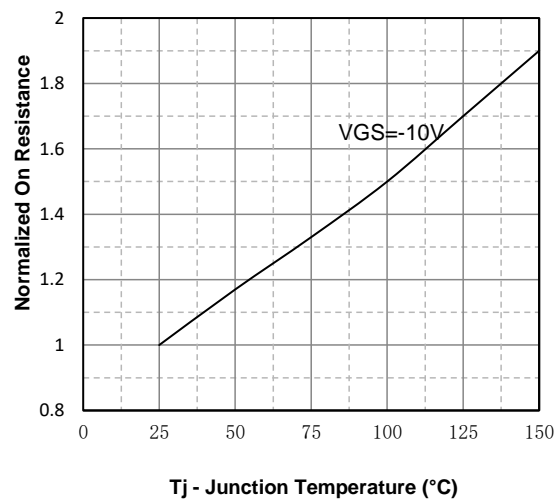


Fig4. Normalized On-Resistance Vs. Temperature

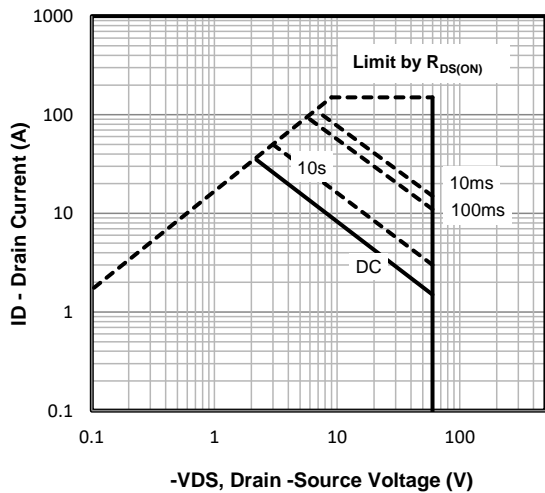


Fig5. Maximum Safe Operating Area


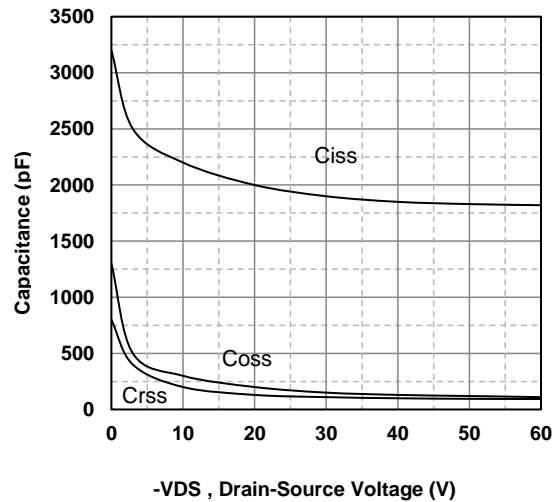


Fig6 Typical Capacitance Vs. Drain-Source Voltage

## TO-252 Package information

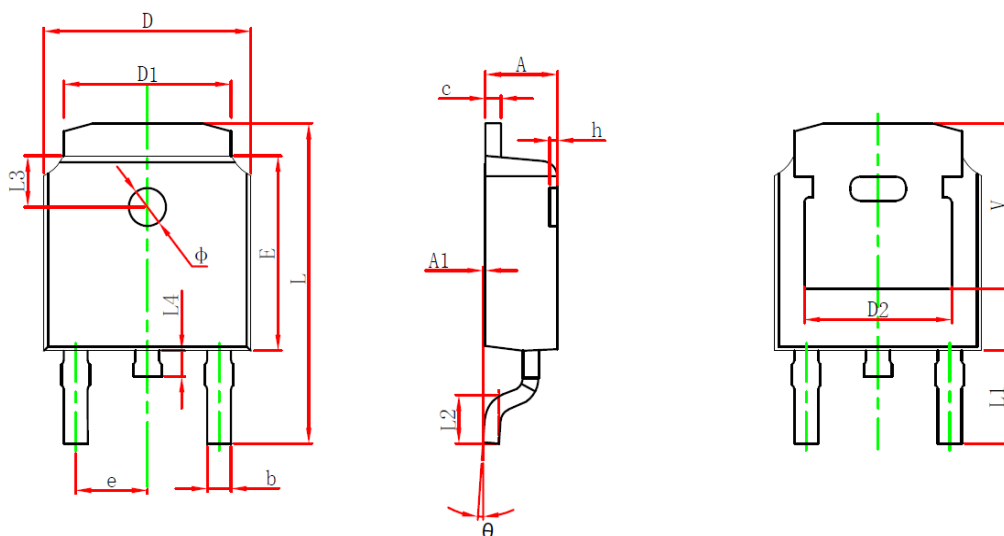

Symbol	Dimensions in Millimeters(mm)		Dimensions in Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.635	0.770	0.025	0.030
c	0.450	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.386	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [SLKORMICRO](#) manufacturer:*

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)  
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)  
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)  
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)  
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)  
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)  
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1\\_T0\\_00201](#) [PJMF380N65E1\\_T0\\_00201](#)  
[PJMF280N60E1\\_T0\\_00201](#) [PJMF600N65E1\\_T0\\_00201](#) [PJMF900N65E1\\_T0\\_00201](#)