



■ Switching Diodes

Features

- Fast Switching Speed
- For General Purpose Switching Applications.
- High Conductance



■ Simplified outline(SOT-23)

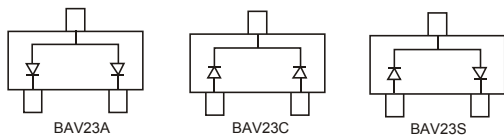

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V _{RRM}	250	V	
Working Peak Reverse Voltage	V _{RWM}	200		
DC Blocking Voltage	V _R	200		
RMS Reverse Voltage	V _{R(RMS)}	141		
Forward Continuous Current	I _{FM}	400	mA	
Non-Repetitive Peak Forward Surge Current	I _{FSM}	t=1us	9	A
		t=100us	3	
		t=10ms	1.7	
Repetitive Peak Forward Surge Current	I _{FRM}	625	mA	
Power Dissipation	P _d	350	mW	
Thermal Resistance Junction to Ambient	R _{θJA}	357	°C/W	
Junction Temperature	T _J	150	°C	
Storage Temperature range	T _{stg}	-65 to 150		

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	V _R	I _R = 100 uA	250			V
Forward voltage	V _F	I _F = 100 mA			1	
		I _F = 200 mA			1.25	
Reverse voltage leakage current	I _R	V _R = 200 V , T _J = 25°C			100	nA
		V _R = 200 V , T _J = 150°C			100	uA
Junction capacitance	C _j	V _R = 0 V, f= 1 MHz			5	pF
Reverse recovery time	t _{rr}	I _F =I _R =30mA, I _{rr} =0.1xI _R , R _L =100Ω			50	ns

■ Marking

NO.	BAV23A	BAV23C	BAV23S
Marking	KT7	KT6	KL31

■ Typical Characteristics

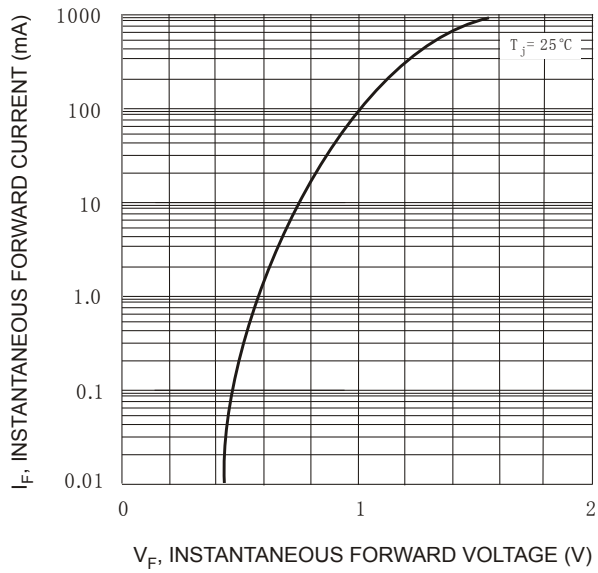


Fig. 1 Forward Characteristics


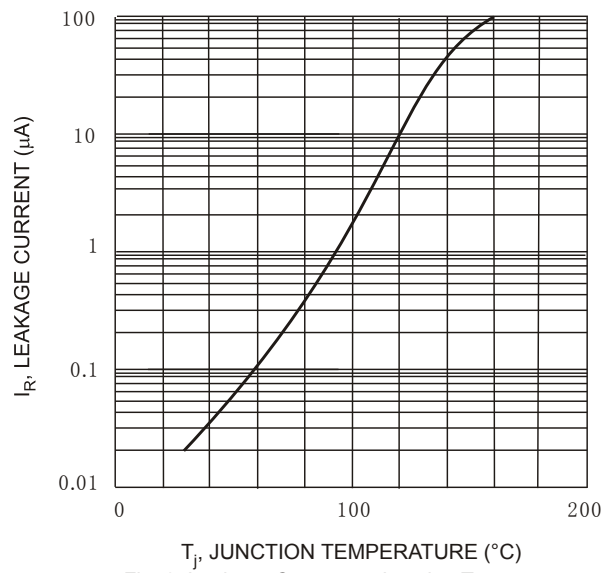


Fig. 2 Leakage Current vs Junction Temperature

■ SOT-23

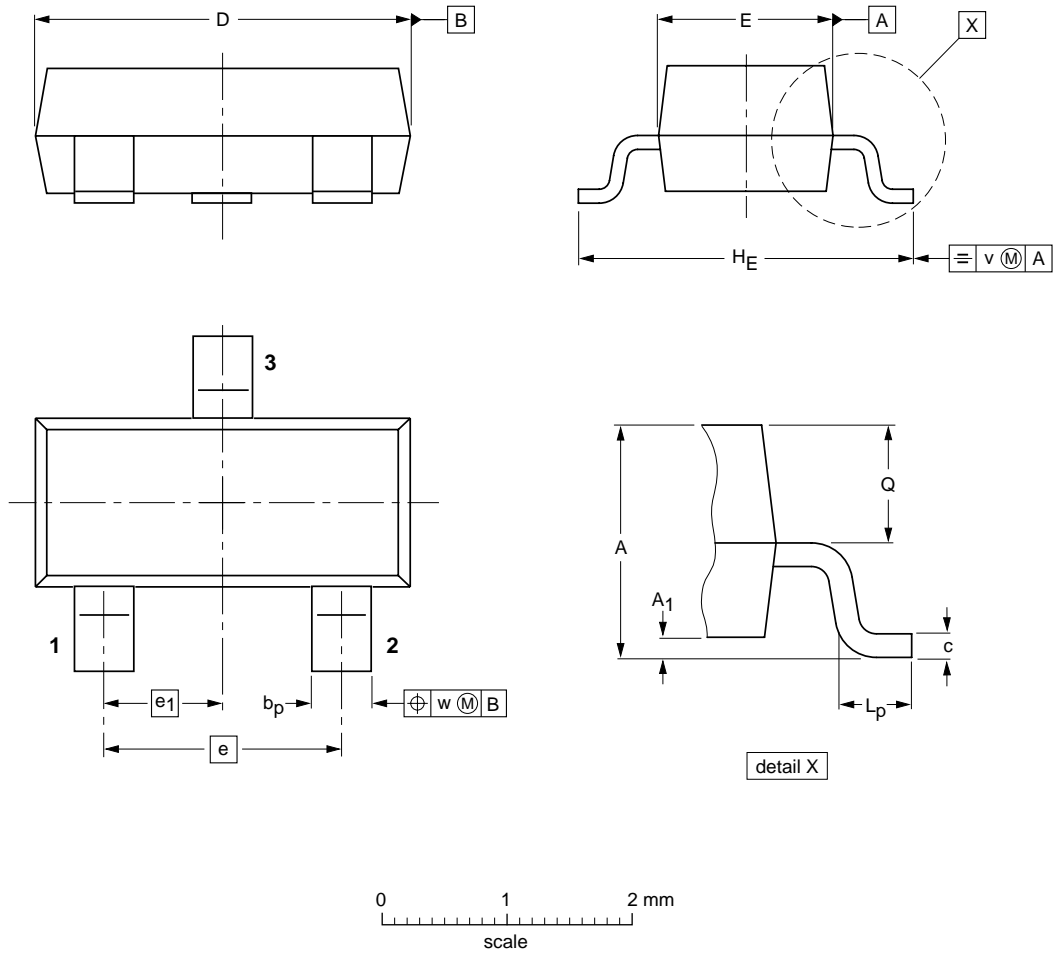

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁ max.	b _p	c	D	E	e	e ₁	H _E	L _p	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [SLKORMICRO manufacturer](#):

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [DSE010-TR-E](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [FC903-TR-E](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4153-1](#) [JAN1N4454-1](#) [JAN1N4454UR-1](#) [LL4151-GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [1SS388-TP](#) [RGP30D-E3/73](#)