


NPN Silicon Epitaxial Planar Transistor

for general purpose and switching applications



1.Base 2.Emitter 3.Collector
SOT-323 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	80	V
		50	
		30	
		30	
		50	
Collector Emitter Voltage	V_{CEO}	65	V
		45	
		30	
		30	
		45	
Emitter Base Voltage	V_{EBO}	6	V
		6	
		5	
		5	
		5	
Collector Current	I_C	100	mA
Peak Collector Current	I_{CM}	200	mA
Total Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	- 55 to + 150	°C

MARKING CODE

TYPE	846AW	846BW	846CW	847AW	847BW	847CW	848AW	848BW	848CW
MARKING	1A	1B	1C	1E	1F	1G	1J	1K	1L
TYPE	849AW	849BW	849CW	850AW	850BW	850CW			
MARKING	2A	2B	2C	2E	2F	2G			

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $V_{CE} = 5 \text{ V}$, $I_C = 2 \text{ mA}$	h_{FE}	110	220	-
BC846AW~BC850AW		200	450	-
BC846BW~BC850BW		420	800	-
BC846CW~BC850CW				
Collector Base Voltage at $I_C = 10 \mu\text{A}$				
BC846W	V_{CBO}	80	-	
BC847W		50	-	V
BC848W		30	-	
BC849W		30	-	
BC850W		50	-	
Collector Emitter Voltage at $I_C = 10 \text{ mA}$				
BC846W	V_{CEO}	65	-	
BC847W		45	-	V
BC848W		30	-	
BC849W		30	-	
BC850W		45	-	
Emitter Base Voltage at $I_E = 1 \mu\text{A}$				
BC846W	V_{EBO}	6	-	
BC847W		6	-	V
BC848W		5	-	
BC849W		5	-	
BC850W		5	-	
Collector Base Cutoff Current at $V_{CB} = 30 \text{ V}$	I_{CBO}	-	15	nA
Emitter Base Cutoff Current at $V_{EB} = 5 \text{ V}$	I_{EBO}	-	100	nA
Collector Emitter Saturation Voltage at $I_C = 10 \text{ mA}$, $I_B = 0.5 \text{ mA}$ $I_C = 100 \text{ mA}$, $I_B = 5 \text{ mA}$	$V_{CE(\text{sat})}$	-	0.25 0.6	V
Base Emitter Voltage at $V_{CE} = 5 \text{ V}$, $I_C = 2 \text{ mA}$ $V_{CE} = 5 \text{ V}$, $I_C = 10 \text{ mA}$	V_{BE}	0.58 -	0.7 0.77	V
Transition Frequency at $V_{CE} = 5 \text{ V}$, $I_C = 10 \text{ mA}$, $f = 100 \text{ MHz}$	f_T	100	-	MHz
Collector Output Capacitance at $V_{CB} = 10 \text{ V}$, $I_E = 0$, $f = 1 \text{ MHz}$	C_{ob}	-	4.5	pF

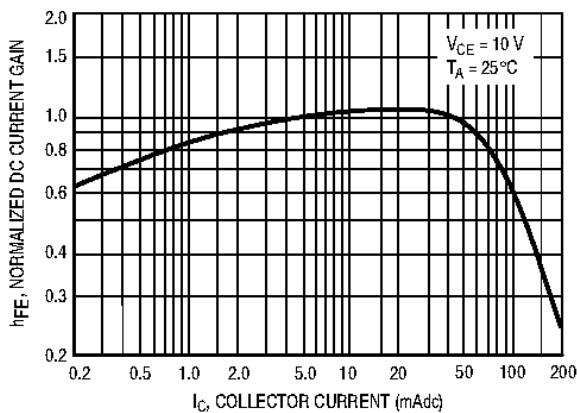


Figure 1. Normalized DC Current Gain

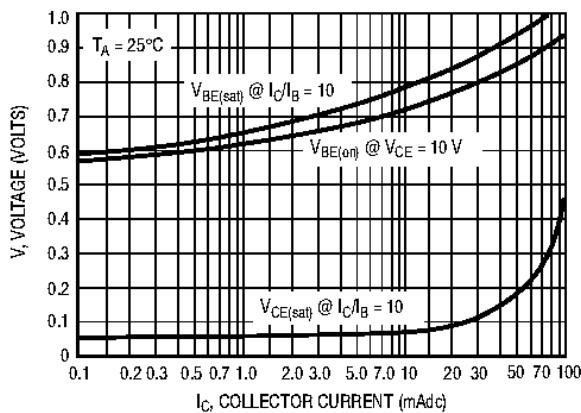


Figure 2. "Saturation" and "On" Voltages

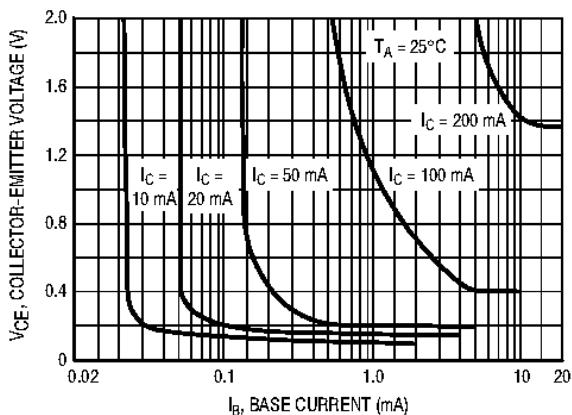


Figure 3. Collector Saturation Region

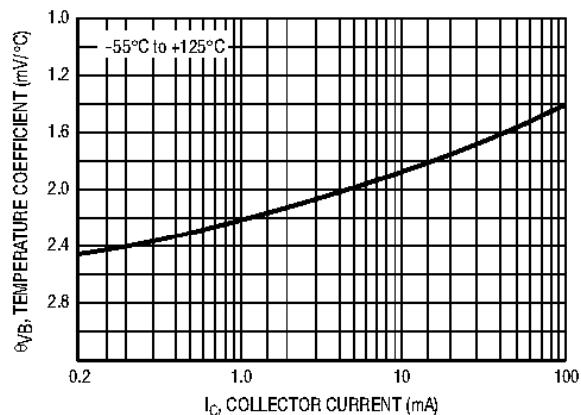


Figure 4. Base-Emitter Temperature Coefficient

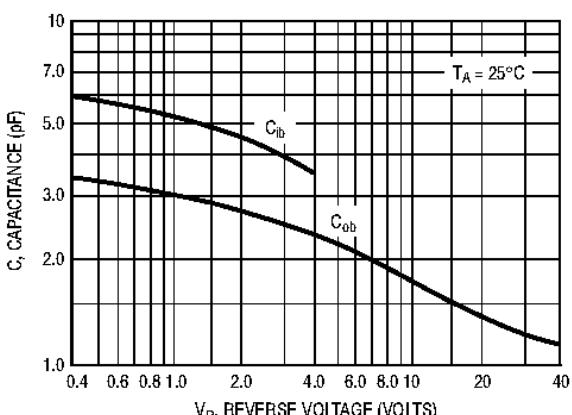


Figure 5. Capacitances

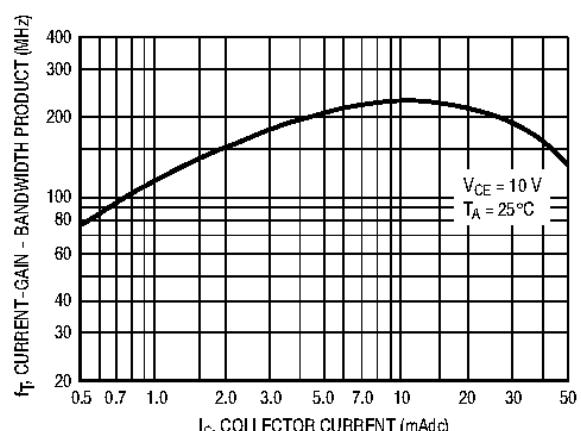


Figure 6. Current-Gain – Bandwidth Product

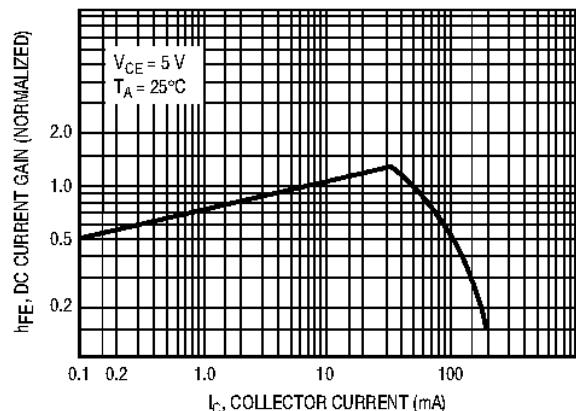


Figure 7. DC Current Gain

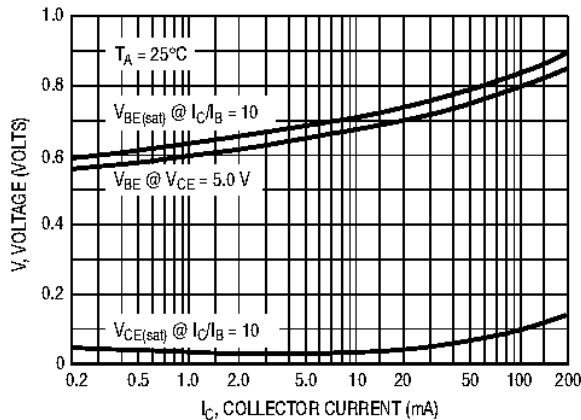


Figure 8. "On" Voltage

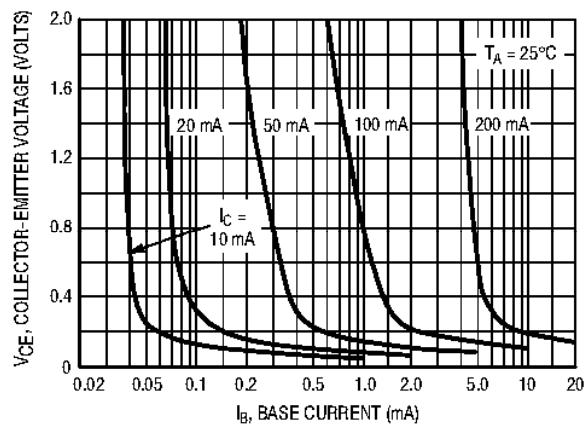


Figure 9. Collector Saturation Region

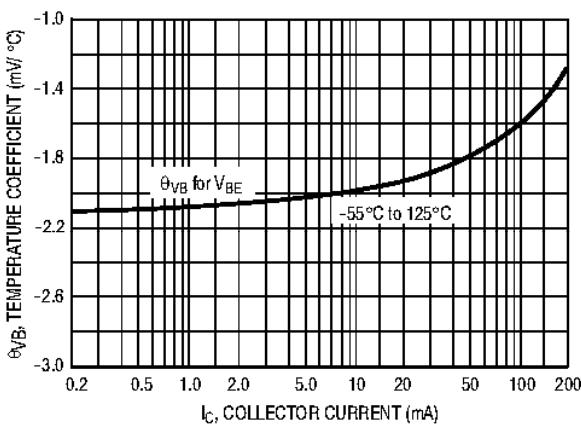


Figure 10. Base-Emitter Temperature Coefficient

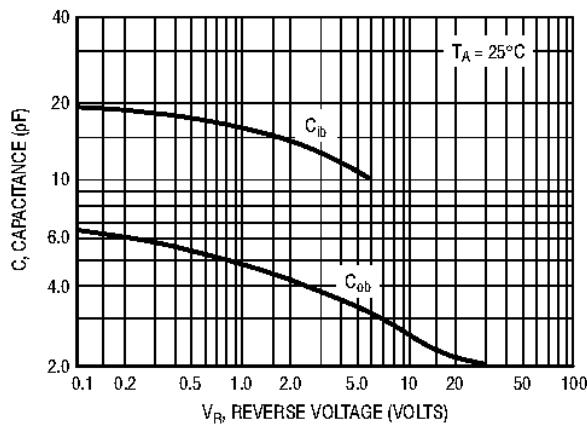


Figure 11. Capacitance

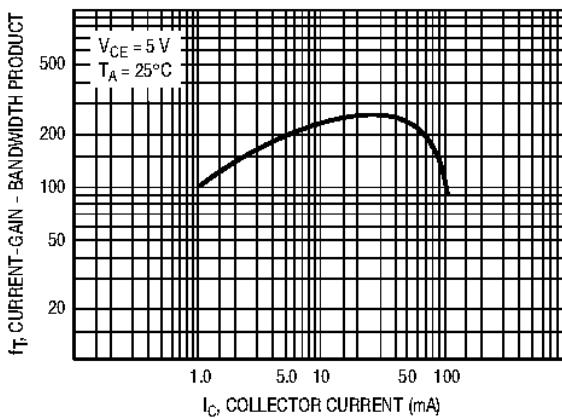


Figure 12. Current-Gain – Bandwidth Product

SOT-323 PACKAGE OUTLINE DIMENSIONS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by SLKORMICRO manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [SP000011176](#) [2N2907A](#) [2N3904-](#)
[NS](#) [2N5769](#) [2SC2412KT146S](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#)
[CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [30A02MH-TL-E](#) [NTE13](#) [NTE26](#)
[NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#) [JANTX2N2920L](#) [JANSR2N2222AUB](#) [CMLT3946EG TR](#) [2SA1371D-AE](#)