


特性/机械性能: FEATURES/MECHANICAL DATA

- ◆The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆Metal silicon junction, majority carrier conduction
- ◆Low power loss, high efficiency
- ◆High forward surge current capability
- ◆High temperature soldering guaranteed: 250°C/10 seconds
- ◆Case: JEDEC SOD-123FL molded plastic body
- ◆Terminals: Solderable per MIL-STD-750, Method 2026
- ◆Polarity: Color band denotes cathode end
- ◆Mounting Position: Any



SOD-123FL

最大额定值及电气特性 MAXIMUM RATINGS AND CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

参数名称	代码	76	单位
Maximum repetitive peak reverse voltage	VRRM	60	V
Maximum RMS voltage	VRMS	42	V
Maximum DC blocking voltage	VDC	60	V
Maximum average forward rectified current	I(AV)	1.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	30	A
Maximum instantaneous forward voltage at=1.0A	VF	0.70	V
Maximum DC reverse current TA=25°C	IR	0.5	mA
at rated DC blocking voltage TA=125°C		5.0	mA
Typical junction capacitance (NOTE 1)	CJ	80	PF
Operating junction temperature range	TJ	-65~+125	°C
Storage temperature range	TSTG	-65~+150	°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

产品外形尺寸:





Product appearance size

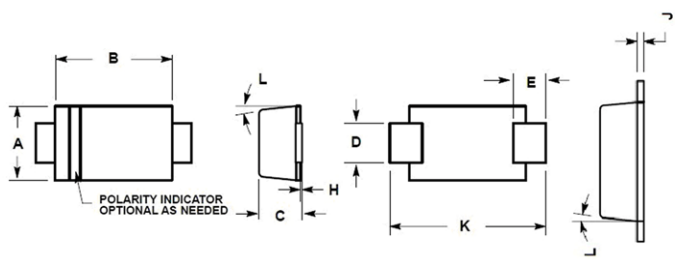

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.50	1.80	0.059	0.071
B	2.50	2.90	0.098	0.114
C	0.90	1.20	0.035	0.047
D	0.70	1.10	0.028	0.043
E	0.50	0.95	0.020	0.037
H	0.00	0.10	0.000	0.004
J	0.10	0.20	0.004	0.008
K	3.40	3.90	0.134	0.154
L	0°	8°	0°	8°

特性曲线图:

RATINGS AND CHARACTERISTIC CURVES

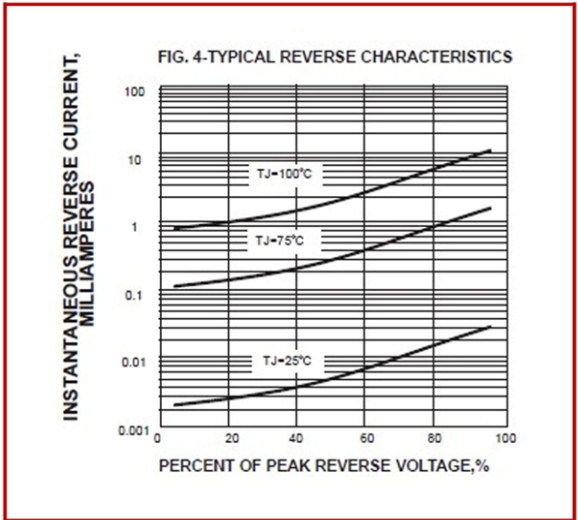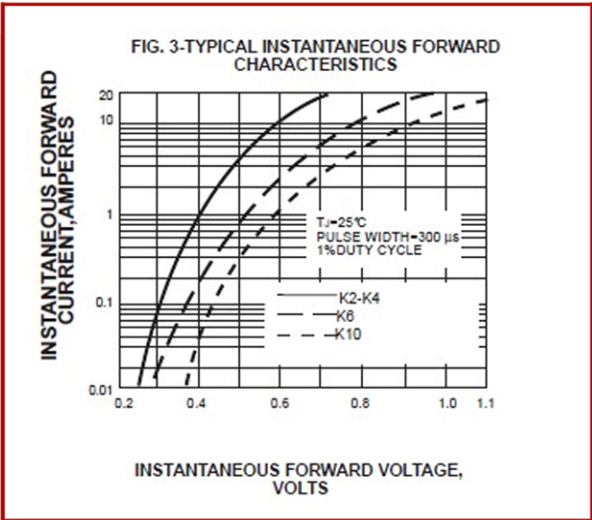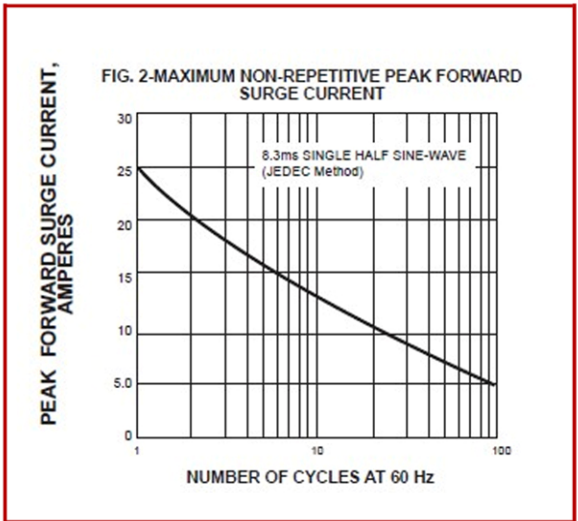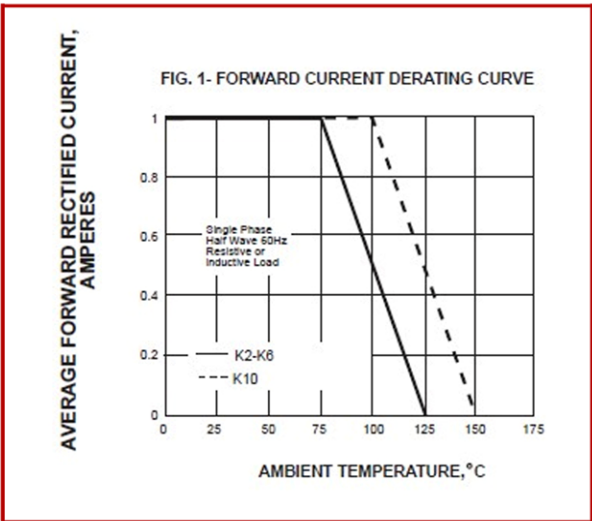

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [SLKORMICRO manufacturer](#):

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS193,LF](#) [1SS400CST2RA](#) [SDAA13](#)
[SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914BTR](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-](#)
[7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [LL4151-GS18](#) [SMMSD4148T3G](#)
[BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-](#)
[13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [1SS388-TP](#) [RGP30D-E3/73](#) [VS-8EWF02S-M3](#) [BAV99TQ-13-F](#)
[BAV99HDW-13](#) [MMDB30-E28X](#) [IDP20C65D2XKSA1](#) [LS4148](#) [IDV15E65D2](#) [NSVM1MA152WAT1G](#)