



# MMBTRC107SS...MMBTRC109SS

## NPN Silicon Epitaxial Planar Transistor

for switching and interface circuit and drive circuit applications

### Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process

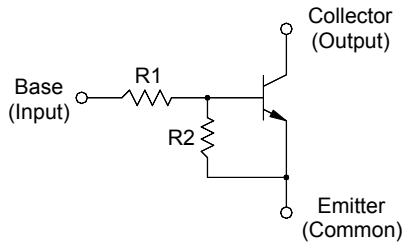


1. Base 2. Emitter 3. Collector  
TO-236 Plastic Package

### Resistor Values

Type	R1 (KΩ)	R2 (KΩ)
MMBTRC107SS	10	47
MMBTRC108SS	22	47
MMBTRC109SS	47	22

### Absolute Maximum Ratings (T<sub>a</sub> = 25 °C)

Parameter		Symbol	Value	Unit
Output Voltage		V <sub>O</sub>	50	V
Input Voltage	MMBTRC107SS	V <sub>I</sub>	30, -6	V
	MMBTRC108SS		40, -7	
	MMBTRC109SS		40, -15	
Output Current		I <sub>O</sub>	100	mA
Total Power Dissipation		P <sub>tot</sub>	200	mW
Junction Temperature		T <sub>j</sub>	150	°C
Storage Temperature Range		T <sub>Stg</sub>	- 55 to + 150	°C



**SEMTECH ELECTRONICS LTD.**



ISO/TS 16949 : 2009 Certificate No. 160713000  
 ISO14001 : 2004 Certificate No. 7116  
 ISO 9001 : 2008 Certificate No. 90719410  
 BS-OHSAS 18001 : 2007 Certificate No. 7116  
 IECQ QC 080000 Certificate No. PRC-HSPM-1483


Dated : 16/03/2015 Rev:01

# MMBTRC107SS...MMBTRC109SS

## Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_O = 5\text{ V}$ , $I_O = 10\text{ mA}$	$G_I$	80	-	-	-
MMBTRC107SS		80	-	-	-
MMBTRC108SS		80	-	-	-
MMBTRC109SS		70	-	-	-
Output Cutoff Current at $V_O = 50\text{ V}$	$I_{O(OFF)}$	-	-	500	nA
Input Current at $V_I = 5\text{ V}$	$I_I$	-	-	0.88	mA
MMBTRC107SS		-	-	0.36	
MMBTRC108SS		-	-	0.16	
MMBTRC109SS		-	-	-	
Output Voltage at $I_O = 10\text{ mA}$ , $I_I = 0.5\text{ mA}$	$V_{O(ON)}$	-	-	0.3	V
Input Voltage (ON) at $V_O = 0.2\text{ V}$ , $I_O = 5\text{ mA}$	$V_{I(ON)}$	-	-	1.8	V
MMBTRC107SS		-	-	2.6	
MMBTRC108SS		-	-	5.8	
MMBTRC109SS		-	-	-	
Input Voltage (OFF) at $V_O = 5\text{ V}$ , $I_O = 0.1\text{ mA}$	$V_{I(OFF)}$	0.5	-	-	V
MMBTRC107SS		0.6	-	-	
MMBTRC108SS		1.5	-	-	
MMBTRC109SS		-	-	-	
Transition Frequency at $V_O = 10\text{ V}$ , $I_O = 5\text{ mA}$	$f_T^{1)}$	-	200	-	MHz

<sup>1)</sup> Characteristic of transistor only.



**SEMTECH ELECTRONICS LTD.**



Dated : 16/03/2015 Rev:01

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [SLKORMICRO manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)  
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)