


# MMUN2211...MMUN2241

## NPN Silicon Epitaxial Planar Transistor


for switching and interface circuit and drive circuit applications

### Resistor Values

Type	R1 (K)	R2 (K)
MMUN2211	10	10
MMUN2212	22	22
MMUN2213	47	47
MMUN2214	10	47
MMUN2215	10	∞
MMUN2216	4.7	∞
MMUN2230	1	1
MMUN2231	2.2	2.2
MMUN2232	4.7	4.7
MMUN2233	4.7	47
MMUN2234	22	47
MMUN2235	2.2	47
MMUN2238	2.2	∞
MMUN2241	100	∞




1. Base 2. Emitter 3. Collector  
SOT-23 Plastic Package

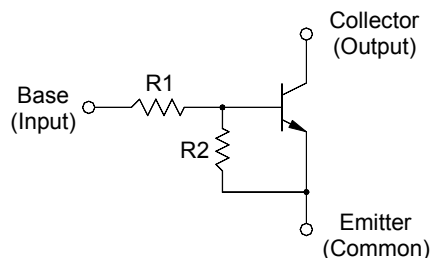

### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Collector Base Voltage	$V_{CBO}$	50	V
Collector Emitter Voltage	$V_{CEO}$	50	V
Collector Current	$I_C$	100	mA
Total Power Dissipation	$P_{tot}$	200	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{Stg}$	- 55 to + 150	$^\circ\text{C}$



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited




Dated : 17/08/2007

# MMUN2211...MMUN2241

## Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit	
DC Current Gain at $V_{CE} = 10\text{ V}$ , $I_C = 5\text{ mA}$	MMUN2211	$h_{FE}$	35	-	-
	MMUN2212	$h_{FE}$	60	-	-
	MMUN2213	$h_{FE}$	80	-	-
	MMUN2214	$h_{FE}$	80	-	-
	MMUN2215	$h_{FE}$	160	-	-
	MMUN2216	$h_{FE}$	160	-	-
	MMUN2230	$h_{FE}$	3	-	-
	MMUN2231	$h_{FE}$	8	-	-
	MMUN2232	$h_{FE}$	15	-	-
	MMUN2233	$h_{FE}$	80	-	-
	MMUN2234	$h_{FE}$	80	-	-
	MMUN2235	$h_{FE}$	80	-	-
	MMUN2238	$h_{FE}$	160	-	-
	MMUN2241	$h_{FE}$	160	-	-
Collector Base Cutoff Current at $V_{CB} = 50\text{ V}$	$I_{CBO}$	-	100	nA	
Collector Emitter Cutoff Current at $V_{CE} = 50\text{ V}$	$I_{CEO}$	-	500	nA	
Emitter Base Cutoff Current at $V_{EB} = 6\text{ V}$	MMUN2211	$I_{EBO}$	-	0.5	mA
	MMUN2212	$I_{EBO}$	-	0.2	mA
	MMUN2213	$I_{EBO}$	-	0.1	mA
	MMUN2214	$I_{EBO}$	-	0.2	mA
	MMUN2215	$I_{EBO}$	-	0.9	mA
	MMUN2216	$I_{EBO}$	-	1.9	mA
	MMUN2230	$I_{EBO}$	-	4.3	mA
	MMUN2231	$I_{EBO}$	-	2.3	mA
	MMUN2232	$I_{EBO}$	-	1.5	mA
	MMUN2233	$I_{EBO}$	-	0.18	mA
	MMUN2234	$I_{EBO}$	-	0.13	mA
	MMUN2235	$I_{EBO}$	-	0.2	mA
	MMUN2238	$I_{EBO}$	-	4	mA
	MMUN2241	$I_{EBO}$	-	0.1	mA
Collector Base Breakdown Voltage at $I_C = 10\text{ }\mu\text{A}$	$V_{(BR)CBO}$	50	-	V	
Collector Emitter Breakdown Voltage at $I_C = 2\text{ mA}$	$V_{(BR)CEO}$	50	-	V	
Collector Emitter Saturation Voltage at $I_C = 10\text{ mA}$ , $I_B = 0.3\text{ mA}$ at $I_C = 10\text{ mA}$ , $I_B = 5\text{ mA}$ at $I_C = 10\text{ mA}$ , $I_B = 1\text{ mA}$	MMUN2230	$V_{CEsat}$	-	0.25	V
	MMUN2231	$V_{CEsat}$	-	0.25	V
	MMUN2215	$V_{CEsat}$	-	0.25	V
	MMUN2216	$V_{CEsat}$	-	0.25	V
	MMUN2232	$V_{CEsat}$	-	0.25	V
	MMUN2233	$V_{CEsat}$	-	0.25	V
	MMUN2234	$V_{CEsat}$	-	0.25	V
	MMUN2235	$V_{CEsat}$	-	0.25	V
	MMUN2238	$V_{CEsat}$	-	0.25	V
	MMUN2238	$V_{CEsat}$	-	0.25	V



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited




Dated : 17/08/2007

# MMUN2211...MMUN2241

## Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter		Symbol	Min.	Max.	Unit	
Output Voltage (on) at $V_{CC} = 5\text{ V}$ , $V_B = 2.5\text{ V}$ , $R_L = 1\text{ K}\Omega$	MMUN2211	$V_{OL}$	-	0.2	V	
	MMUN2212	$V_{OL}$	-	0.2	V	
	MMUN2214	$V_{OL}$	-	0.2	V	
	MMUN2215	$V_{OL}$	-	0.2	V	
	MMUN2216	$V_{OL}$	-	0.2	V	
	MMUN2230	$V_{OL}$	-	0.2	V	
	MMUN2231	$V_{OL}$	-	0.2	V	
	MMUN2232	$V_{OL}$	-	0.2	V	
	MMUN2233	$V_{OL}$	-	0.2	V	
	MMUN2234	$V_{OL}$	-	0.2	V	
	MMUN2235	$V_{OL}$	-	0.2	V	
	MMUN2238	$V_{OL}$	-	0.2	V	
	at $V_{CC} = 5\text{ V}$ , $V_B = 3.5\text{ V}$ , $R_L = 1\text{ K}\Omega$	MMUN2213	$V_{OL}$	-	0.2	V
	at $V_{CC} = 5\text{ V}$ , $V_B = 5\text{ V}$ , $R_L = 1\text{ K}\Omega$	MMUN2241	$V_{OL}$	-	0.2	V
	Output Voltage (off) at $V_{CC} = 5\text{ V}$ , $V_B = 0.5\text{ V}$ , $R_L = 1\text{ K}\Omega$ at $V_{CC} = 5\text{ V}$ , $V_B = 0.05\text{ V}$ , $R_L = 1\text{ K}\Omega$ at $V_{CC} = 5\text{ V}$ , $V_B = 0.25\text{ V}$ , $R_L = 1\text{ K}\Omega$		$V_{OH}$	4.9	-	V
MMUN2230		$V_{OH}$	4.9	-	V	
MMUN2215		$V_{OH}$	4.9	-	V	
MMUN2216		$V_{OH}$	4.9	-	V	
MMUN2233		$V_{OH}$	4.9	-	V	
MMUN2238		$V_{OH}$	4.9	-	V	
Input Resistor	MMUN2211	R1	7	13	K $\Omega$	
	MMUN2212	R1	15.4	28.6	K $\Omega$	
	MMUN2213	R1	32.9	61.1	K $\Omega$	
	MMUN2214	R1	7	13	K $\Omega$	
	MMUN2215	R1	7	13	K $\Omega$	
	MMUN2216	R1	3.3	6.1	K $\Omega$	
	MMUN2230	R1	0.7	1.3	K $\Omega$	
	MMUN2231	R1	1.5	2.9	K $\Omega$	
	MMUN2232	R1	3.3	6.1	K $\Omega$	
	MMUN2233	R1	3.3	6.1	K $\Omega$	
	MMUN2234	R1	15.4	28.6	K $\Omega$	
	MMUN2235	R1	1.54	2.86	K $\Omega$	
	MMUN2238	R1	1.54	2.88	K $\Omega$	
	MMUN2241	R1	70	130	K $\Omega$	
Resistor Ratio	MMUN2211/MMUN2212/MMUN2213	R1/R2	0.8	1.2	-	
	MMUN2214	R1/R2	0.17	0.25	-	
	MMUN2215/MMUN2216/MMUN2238	R1/R2	-	-	-	
	MMUN2241	R1/R2	-	-	-	
	MMUN2230/MMUN2231/MMUN2232	R1/R2	0.8	1.2	-	
	MMUN2233	R1/R2	0.055	0.185	-	
	MMUN2234	R1/R2	0.38	0.56	-	
	MMUN2235	R1/R2	0.038	0.056	-	



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 17/08/2007

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - Pre-Biased](#) category:*

*Click to view products by [SLKORMICRO](#) manufacturer:*

Other Similar products are found below :

[MMUN2217LT1G](#) [FP101-TL-E](#) [RN1607\(TE85L,F\)](#) [DRC9A14E0L](#) [DTA124GKAT146](#) [DTA144WETL](#) [DTA144WKAT146](#)

[DTC113EET1G](#) [DTC115TETL](#) [DTC115TKAT146](#) [DTC124TETL](#) [DTC144ECA-TP](#) [DTC144VUAT106](#) [MUN5241T1G](#)

[BCR158WH6327XTSA1](#) [NSBA114TDP6T5G](#) [NSBA143TF3T5G](#) [NSBA143ZF3T5G](#) [NSBC114EF3T5G](#) [NSBC114YF3T5G](#)

[NSBC123TF3T5G](#) [NSBC143TF3T5G](#) [NSVMUN2212T1G](#) [NSVMUN5111DW1T3G](#) [NSVMUN5314DW1T3G](#) [NSVUMC2NT1G](#)

[SMMUN2134LT1G](#) [SMUN2212T1G](#) [SMUN5235T1G](#) [SMUN5330DW1T1G](#) [SSVMUN5312DW1T2G](#) [2SC3650-TD-E](#) [RN1303\(TE85L,F\)](#)

[RN4605\(TE85L,F\)](#) [BCR135SH6327XT](#) [TTEPROTOTYPE79](#) [UMC3NTR](#) [DTA113EET1G](#) [EMA2T2R](#) [EMH15T2R](#) [SDTA114YET1G](#)

[SMMUN2111LT3G](#) [SMMUN2113LT1G](#) [SMMUN2114LT1G](#) [SMMUN2211LT3G](#) [SMUN2214T3G](#) [SMUN5113DW1T1G](#)

[SMUN5335DW1T1G](#) [NSBA114YF3T5G](#) [NSBC114TF3T5G](#)