

## 4 Channel Ultra-Low Capacitance ESD Protection Diode

### 1. Features

- Ultra-Low capacitance:0.5pF(typ.)
- Reverse stand-off voltage:5V
- IEC 61000-4-2 (Air): ±20KV  
IEC 61000-4-2 (Contact): ±15KV


### 2. Pin Description



### 3. Applications

- USB 3.0, USB 2.0
- HDMI 1.3/1.4, Display Port 1.3, eSATA
- Unified Display Interface (UDI)
- Digital Visual Interface (DVI)
- High speed serial interfaces

### 4. Schematic Diagram

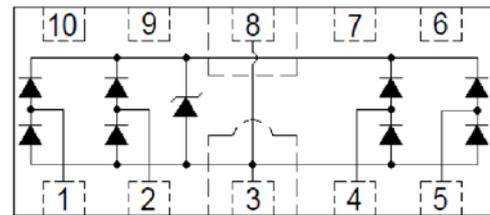

Top View

### 5. Order Information

Type	Package	Size (mm)	Delivery Form	Delivery Quantity
RCLAMP0524P	DFN2510	2.50x1.00x0.50	7" T&R	3,000

### 6. Limiting Values( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified)

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{ESD}$	Electrostatic Discharge Voltage	IEC 61000-4-2; Contact Discharge	-	±15	kV
		IEC 61000-4-2; Air Discharge	-	±20	kV
$I_{PPM}$	Rated Peak Pulse Current	$t_p = 8/20\ \mu\text{s}$	-	5	A
$T_A$	Ambient Temperature Range	-	-55	125	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-	-55	150	$^\circ\text{C}$

## 7. Electrical Characteristics ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
$V_{RWM}$	Reverse Working Voltage	$T_A = 25\text{ }^\circ\text{C}$	-	-	5	V
$V_{BR}$	Breakdown Voltage	$I_R = 1\text{ mA}; T_A = 25\text{ }^\circ\text{C}$	6	-	-	V
$I_R$	Reverse Leakage Current	$V_{RWM} = 5\text{V}; T_A = 25\text{ }^\circ\text{C}$	-	-	1	$\mu\text{A}$
$V_C$	Clamping Voltage	$I_{PP} = 1\text{A}, t_p = 8/20\mu\text{s}$ , Any I/O to GND, Positive	-	8.5	12	V
		$I_{PP} = 5\text{A}, t_p = 8/20\mu\text{s}$ , Any I/O to GND, Positive	-	12	16	V
$C_L$	Junction Capacitance	$V_R = 0\text{V}, f = 1\text{ MHz}$ , I/O to I/O	-	0.3	0.4	pF
		$V_R = 0\text{V}, f = 1\text{ MHz}$ , I/O to GND	-	0.5	0.8	pF

## 8. Typical Characteristics

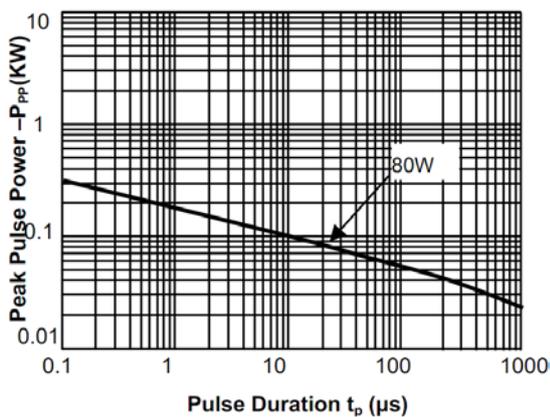


Fig.1 Peak Pulse Power Rating Curve

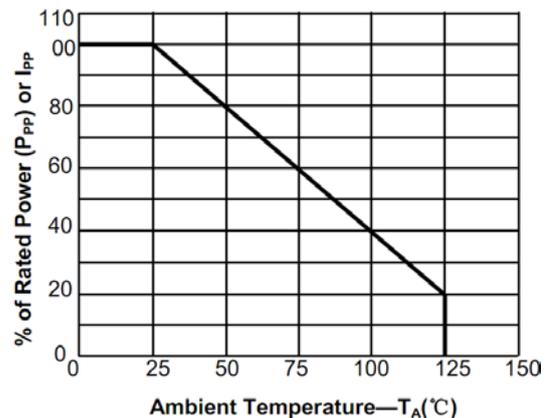


Fig.2 Pulse Derating Curve

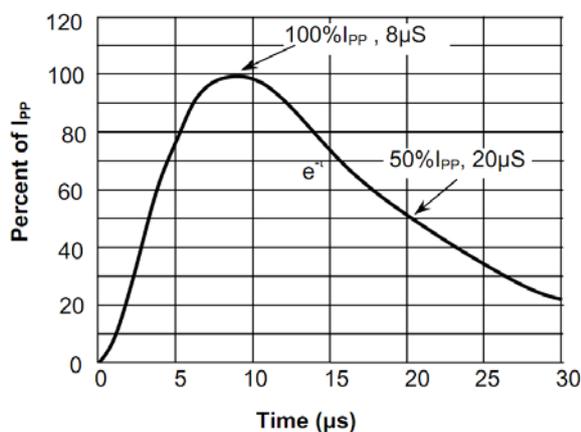


Fig.3 Pulse Waveform-8/20 $\mu\text{s}$


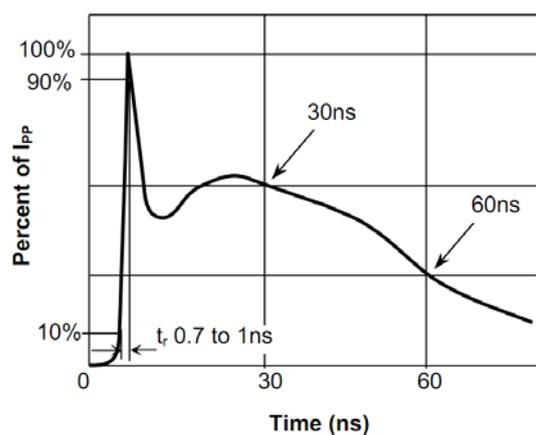



Fig.4 Pulse Waveform-ESD(IEC61000-4-2)

## 9. Package Dimension


### DFN2510 Package Outline

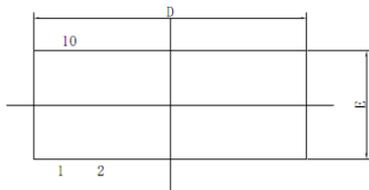


Top View



Side View

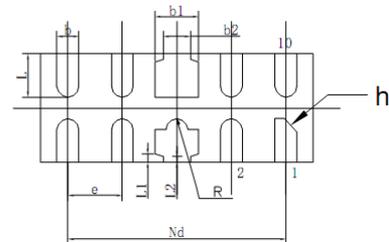


BottomView



Symbol	Dimensions in millimeters		
	Min	Nom	Max
<b>A</b>	0.45	0.50	0.55
<b>A1</b>	-	0.02	0.05
<b>b</b>	0.15	0.20	0.25
<b>b1</b>	0.35	0.40	0.45
<b>b2</b>	0.20	0.25	0.30
<b>c</b>	0.10	0.15	0.20
<b>D</b>	2.45	2.50	2.55
<b>e</b>	0.50BSC		
<b>Nd</b>	2.00 BSC		
<b>E</b>	0.95	1.00	1.05
<b>L</b>	0.35	0.40	0.45
<b>L1</b>	0.075 REF		
<b>L2</b>	0.05 REF		
<b>h</b>	0.08	0.12	0.15
<b>R</b>	0.05	0.10	0.15

## 10. Soldering Parameters

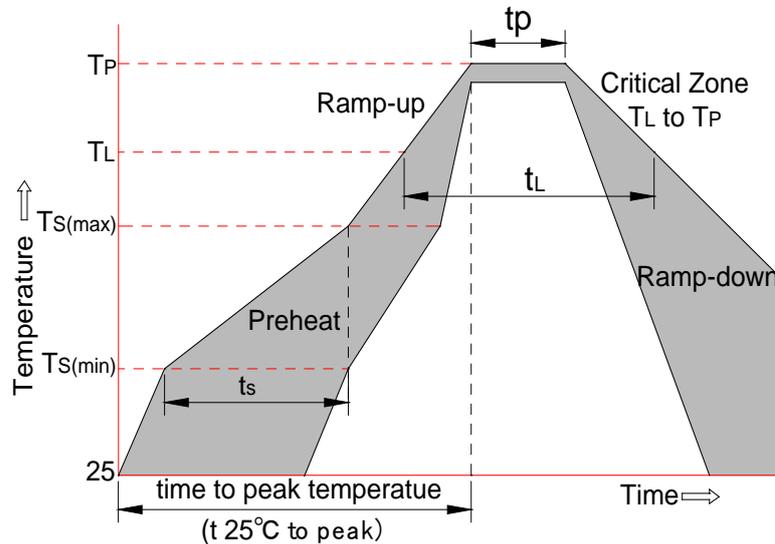

Reflow Condition		Pb-Free Assembly
Pre-heat	-Temperature Min ( $T_{s(min)}$ )	+150°C
	-Temperature Max( $T_{s(max)}$ )	+200°C
	-Time (Min to Max) ( $t_s$ )	60-180 secs.
Average ramp up rate (Liquid us Temp ( $T_L$ ) to peak)		3°C/sec. Max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature( $T_L$ )(Liquid us)	+217°C
	-Temperature( $t_L$ )	60-150 secs.
Peak Temp ( $T_p$ )		+260(+0/-5)°C
Time within 5°C of actual Peak Temp ( $t_p$ )		30 secs. Max
Ramp-down Rate		6°C/sec. Max
xTime 25°C to Peak Temp ( $T_p$ )		8 min. Max
Do not exceed		+260°C

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [SLKORMICRO](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#)  
[D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SM1605E3/TR13](#)  
[SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)  
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#)