


N-Channel Power MOSFET

General Features


- $V_{DS} = 20V, I_D = 2.6A$
 $R_{DS(ON)} < 120m\Omega @ V_{GS}=2.5V$
 $R_{DS(ON)} < 85m\Omega @ V_{GS}=4.5V$
- High power and current handing capability
- Lead free product is acquired
- Surface mount package

Application

- Battery protection
- Load switch
- Power management



Schematic diagram



Marking and pin assignment



SOT-23 top view

MAXIMUM RATINGS


Characteristic	Symbol	Max	Unit
Drain-Source Voltage	BV_{DSS}	20	V
Gate- Source Voltage	V_{GS}	± 8	V
Drain Current (continuous)	I_D	2.6	A
Drain Current (pulsed)	I_{DM}	10	A
Total Device Dissipation $T_A=25^\circ C$	P_D	900	mW
Junction	T_J	150	$^\circ C$
Storage Temperature	T_{stg}	-55to+150	$^\circ C$

ELECTRICAL CHARACTERISTICS

 (T_A=25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage (I _D = 250uA, V _{GS} =0V)	BV _{DSS}	20	—	—	V
Gate Threshold Voltage (I _D = 250uA, V _{GS} = V _{DS})	V _{GS(th)}	0.4	—	1.5	V
Drain-Source On Voltage (I _D = 50mA, V _{GS} = 5V) (I _D = 500mA, V _{GS} = 10V)	V _{DS(ON)}	—	—	0.375 3.75	V
Diode Forward Voltage Drop (I _S = 0.75A, V _{GS} =0V)	V _{SD}	—	—	1.2	V
Zero Gate Voltage Drain Current (V _{GS} =0V, V _{DS} = 16V) (V _{GS} =0V, V _{DS} = 16V, T _A =55°C)	I _{DSS}	—	—	1 10	uA
Gate Body Leakage (V _{GS} =±8V, V _{DS} =0V)	I _{GSS}	—	—	±100	nA
Static Drain-Source On-State Resistance (I _D =2.6A, V _{GS} =4.5V) (I _D =2A, V _{GS} =2.5V)	R _{DS(ON)}	—	—	85 120	mΩ
Input Capacitance (V _{GS} =0V, V _{DS} = 6V, f=1MHz)	C _{ISS}	—	—	880	pF
Common Source Output Capacitance (V _{GS} =0V, V _{DS} = 6V, f=1MHz)	C _{OSS}	—	—	270	pF
Turn-ON Time (V _{DS} = 6V, I _D = 1A, R _{GEN} =6Ω)	t _(on)	—	—	20	ns
Turn-OFF Time (V _{DS} = 6V, I _D = 1A, R _{GEN} =6Ω)	t _(off)	—	—	65	ns

Pulse Width ≤ 300 μs; Duty Cycle ≤ 2.0%

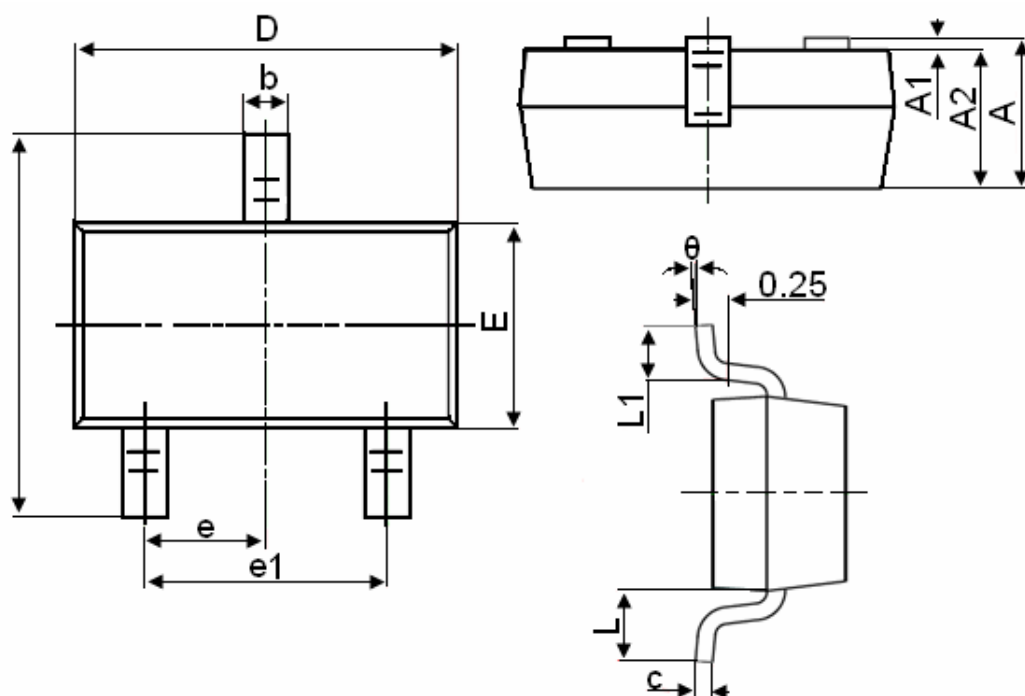SOT-23 Package Information


Symbol	Dimensions in Millimeters	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [SLKORMICRO](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)