



## Transient Voltage Suppressors for ESD Protection

### DFN0603-2L Package



W = Specific Device Code  
M = Month Code

### FEATURES

- Small Body Outline Dimensions:
- 0.61 mm x 0.31 mm
- Low Body Height: 0.28 mm
- Low Leakage
- Response Time is Typically < 1 ns
- IEC61000-4-2 Level 4 ESD Protection
- These are Pb-Free Devices
- We declare that the material of product compliance with RoHS requirements.


### ABSOLUTE RATINGS(Ta = 25 °C)

Parameter	Symbol	Limits	Unit
IEC 61000-4-2 (ESD)	Contact	±20	kV
	Air	±25	
IEC 61000 - 4 - 4 (EFT)		40	A
ESD Voltage(Per Human Body Model)		16	kV
Total Power Dissipation on FR-5 Broad	PD	160	mW
Maximum Junction Temperature	T <sub>J</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-55 ~ +150	°C
Lead Solder Temperature – Maximum (10 Second Duration)	TL	260	°C

### Electrical Parameter

Symbol	Parameter
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>
V <sub>RWM</sub>	Working Peak Reverse Voltage
I <sub>R</sub>	Maximum Reverse Leakage Current @ V <sub>RWM</sub>
V <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>
I <sub>T</sub>	Test Current
P <sub>pk</sub>	Peak Power Dissipation
C	Capacitance @ V <sub>R</sub> = 0 and f = 1.0 MHz

### SLESD11D5V0C

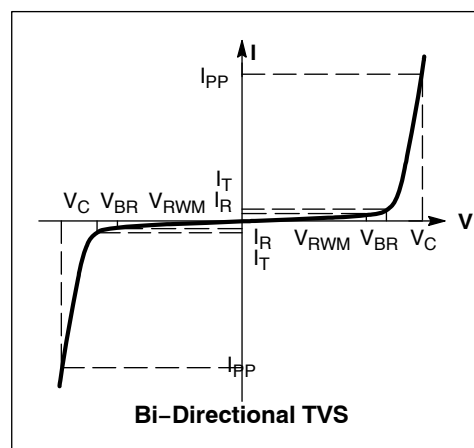

## ● ELECTRICAL CHARACTERISTICS (Ta= 25°C)

Device	V <sub>RWM</sub> (V)	I <sub>R</sub> (u A) @V <sub>RWM</sub>	V <sub>BR</sub> (V) @ I <sub>T</sub> (Note 1)		I <sub>T</sub>	V <sub>C</sub> (V) @I <sub>pp</sub> = 5 A	V <sub>C</sub> (V) @Max I <sub>pp</sub>	I <sub>PP</sub> (A)	P <sub>PK</sub> (W)	C (pF)
	Max	Max	Min	Max	mA	Max	Max	Max	Max	Max
SLESD11D5V0C	5.0	0.1	5.6	7.8	1	11	11.8	5.76	50	10

1. V<sub>BR</sub> is measured with a pluse test current I<sub>T</sub> at an ambient temperature of 25°C.



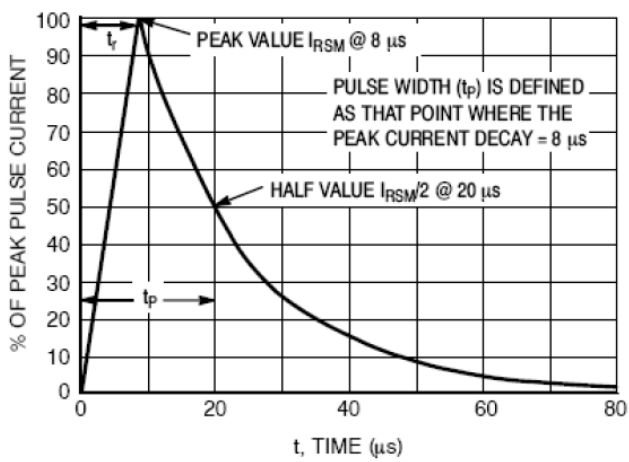


Figure 1. 8 x 20 μs Pulse Waveform

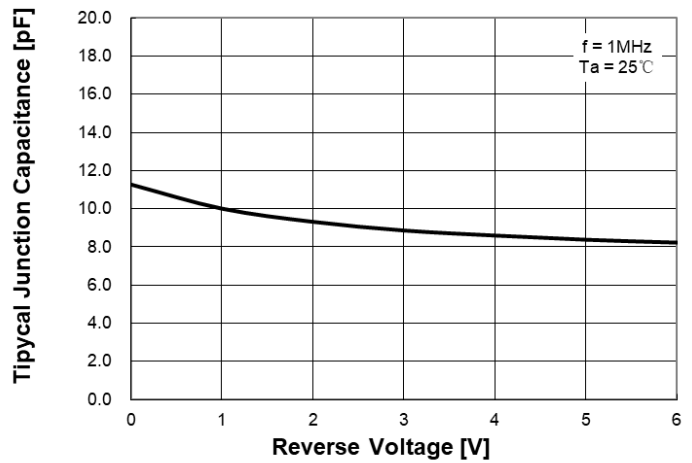


## DFN0603-2L Package Outline Dimensions

### OUTLINE AND DIMENSIONS

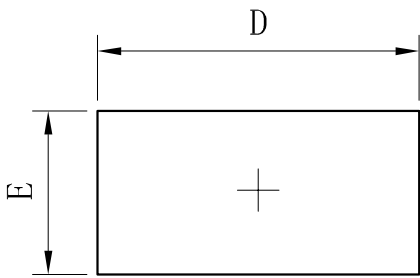

TOP VIEW

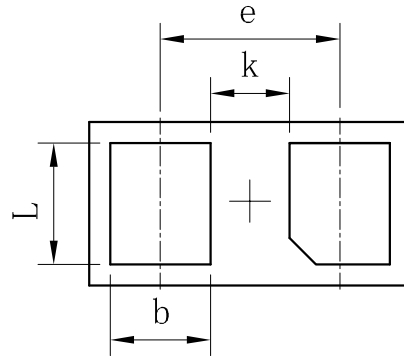


BOTTOM VIEW

DFN0603-DL			
Dim	Min	Typ.	Max
D	0.58	0.61	0.64
E	0.28	0.31	0.34
e	-	0.34	-
L	0.20	0.23	0.26
b	0.16	0.19	0.22
A	0.25	0.28	0.31
k	0.12	0.15	0.18
All Dimensions in mm			



SIDE VIEW

### SOLDERING FOOTPRINT

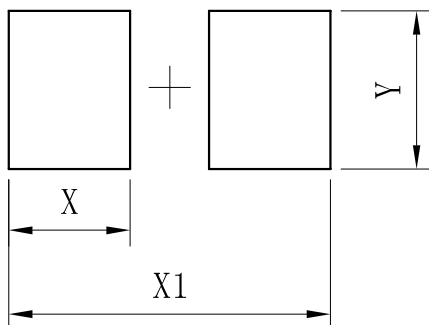

DFN0603-DL	
DIM	(mm)
X	0.23
X1	0.61
Y	0.30

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [SLKORMICRO](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#)  
[D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SM1605E3/TR13](#)  
[SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)  
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#)