

1.0A SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

FEATURES:

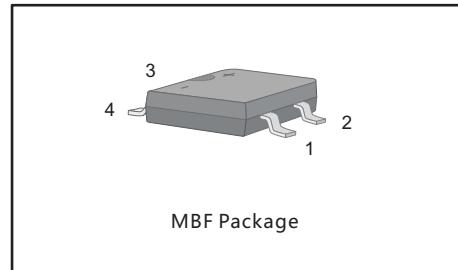
- Glass Passivated Chip Junction
- Reverse Voltage - 100 to 1000 V
- Forward Current - 1.0 A
- Fast reverse recovery time
- Designed for Surface Mount Application

PINNING

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

MECHANICAL DATA

- Case: MBF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 75mg 0.0026oz



Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.


Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	UMB1F	UMB2F	UMB4F	UMB6F	UMB8F	UMB10F	Units			
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	100	200	400	600	800	1000	V			
Maximum RMS voltage	V _{RMS}	70	140	280	420	560	700	V			
Maximum DC Blocking Voltage	V _{DC}	100	200	400	600	800	1000	V			
Average Rectified Output Current at T _c = 125 °C	I _o	1.0						A			
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	35						A			
Maximum Forward Voltage at 1.0 A	V _F	1.0		1.3	1.5			V			
Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a = 125 °C	I _R	5.0 100						μA			
Typical Junction Capacitance ¹⁾	C _j	18						pF			
Maximum Reverse Recovery Time ²⁾	t _{rr}	50			75			ns			
Typical Thermal Resistance ³⁾	R _{θJA} R _{θJC}	80 25						°C/W			
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150						°C			






Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. Measured with I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A.

3. Mounted on glass epoxy PC board with 4×1.5"×1.5" (3.81×3.81 cm) copper pad.

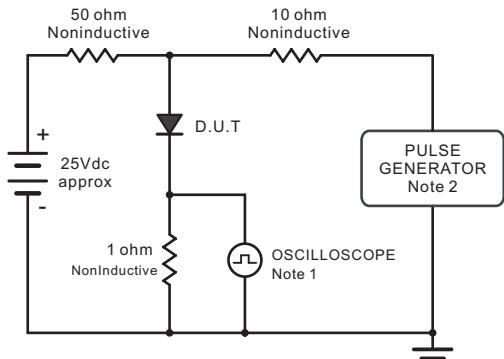Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram


Note: 1. Rise Time = 7ns, max.
Input Impedance = 1megohm, 22pF.
2. Ries Time = 10ns, max.
Source Impedance = 50 ohms.

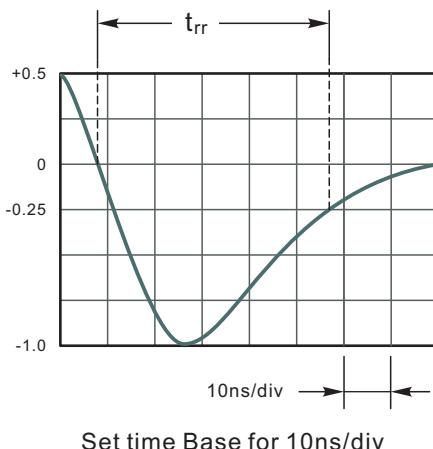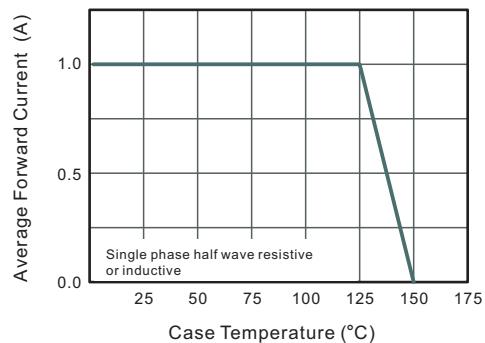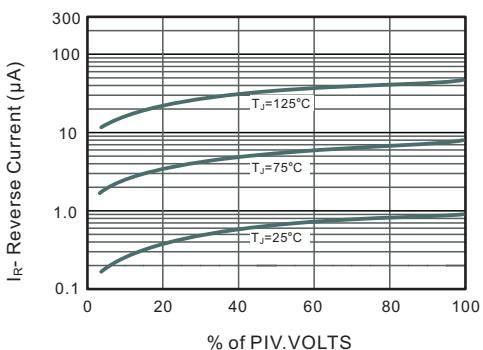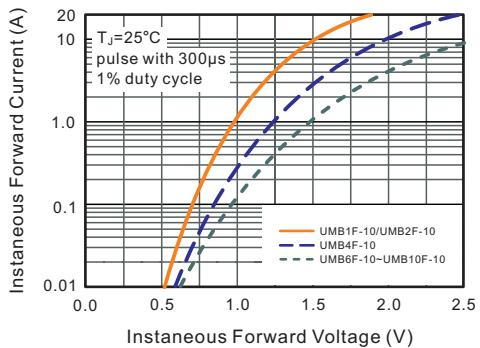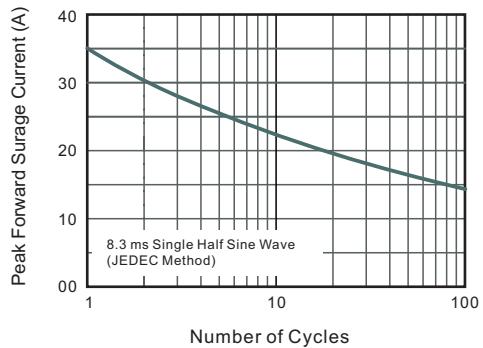**Fig.2 Maximum Average Forward Current Rating****Fig.3 Typical Reverse Characteristics****Fig.3 Typical Instantaneous Forward Characteristics****Fig.4 Maximum Non-Repetitive Peak Forward Surge Current**


PACKAGE OUTLINE

Plastic surface mounted package; 4 leads

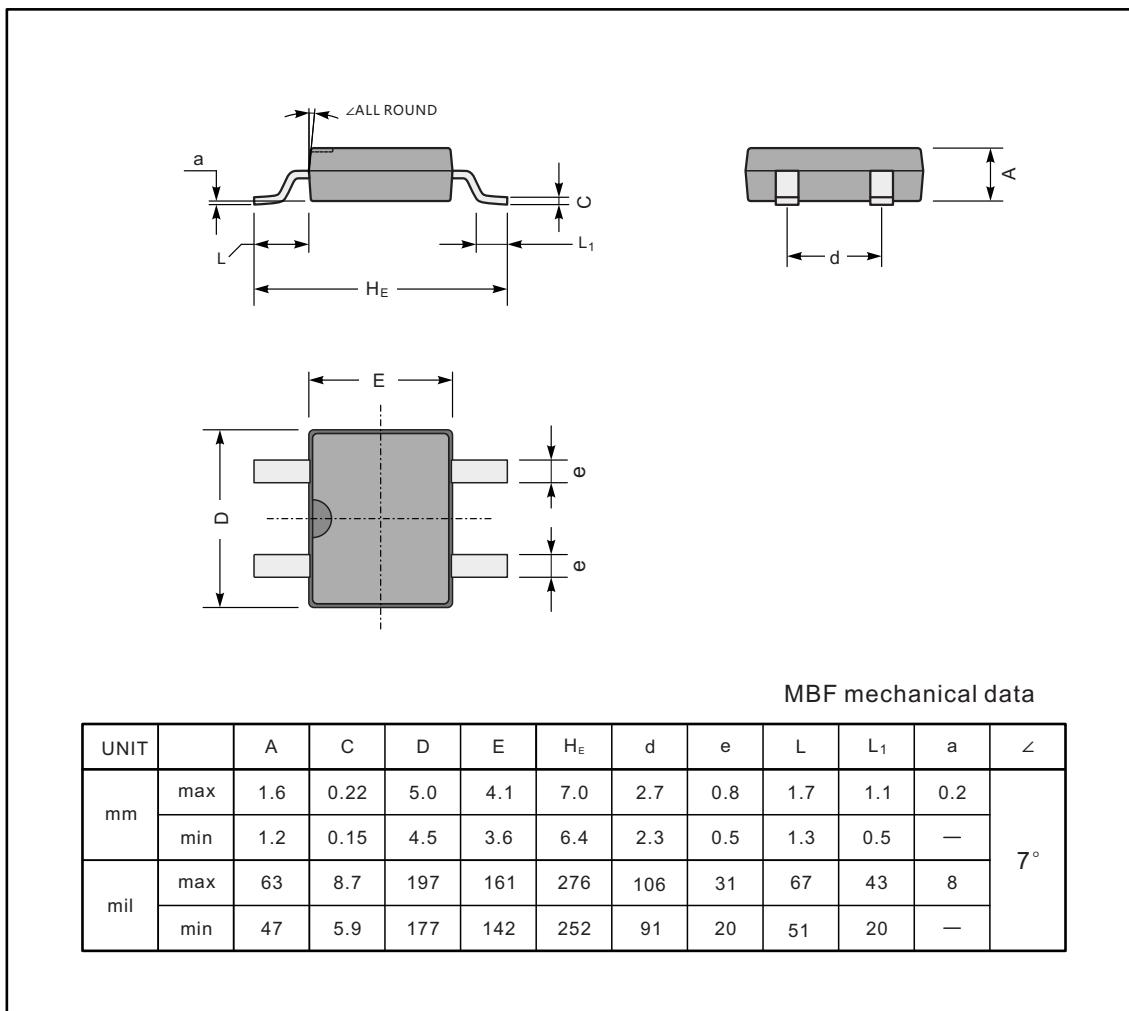MBF



The recommended mounting pad size

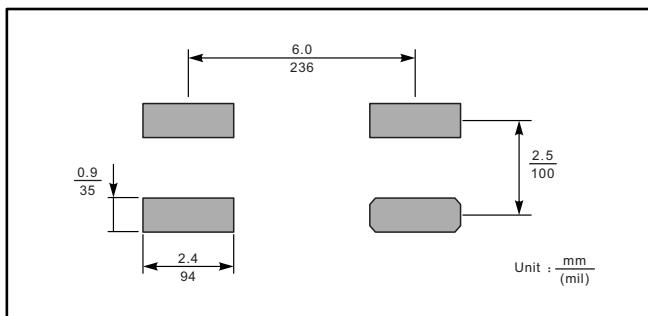

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [SLKORMICRO](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#)
[GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DBA100G](#) [DBA150G](#) [DBA250G](#) [DBA40G](#) [DBD10G-TM-E](#) [DBF10G](#) [DBF250G](#)
[DBG150G](#) [DBG250G](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#)
[GBU10J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#)
[TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#)