


1.0A Surface Mount Ultra Fast Recovery Rectifier

Features

- Glass passivated junction chip
- Fast switching for high efficiency
- For surface mounted application
- High temperature soldering guaranteed: 250°C/10 seconds, at terminals
- Plastic material used carries UL Classification 94V-0
- RoHS Compliance



SMA

Maximum Ratings and Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Description	US1A	US1B	US1D	US1G	US1J	US1K	US1M	Unit	Conditions
V_{RRM}	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
V_{RMS}	Maximum RMS Voltage	35	70	140	280	420	560	700	V	
V_{DC}	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
I_{F(AV)}	Maximum Average Forward Rectified Current	1.0							A	See Fig.1
I_{FSM}	Peak Forward Surge Current	30							A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)
V_F	Maximum Instantaneous Forward Voltage	1.0			1.25	1.7		V	I _{F(AV)} =1.0A	
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage	5.0							μA	T _A =25°C
		100								T _A =125°C
T_{rr}	Maximum Reverse Recovery Time	50				75			nS	I _F =0.5A, I _R =1.0A, I _{rr} =0.25A
C_J	Typical Junction Capacitance	17							pF	V _R =4V, f=1MHz

Symbol	Description	US1A	US1B	US1D	US1G	US1J	US1K	US1M	Unit	Conditions
T _J , T _{STG}	Operating Junction and Storage Temperature Range	-55 to +150							°C	

Typical Characteristics Curves

Fig.1- Forward Current Derating Curve

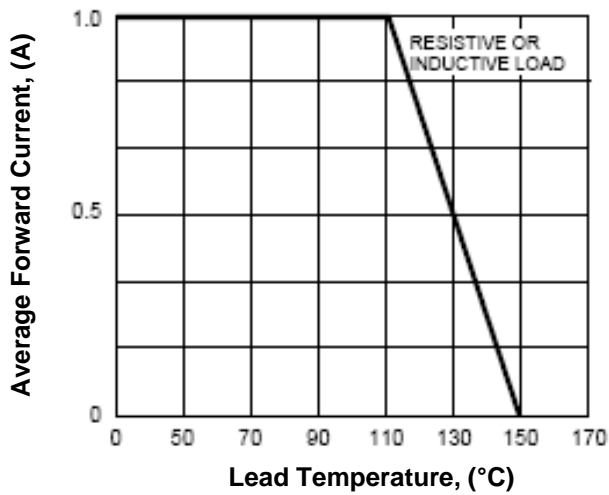


Fig.2- Maximum Non-Repetitive Forward Surge Current

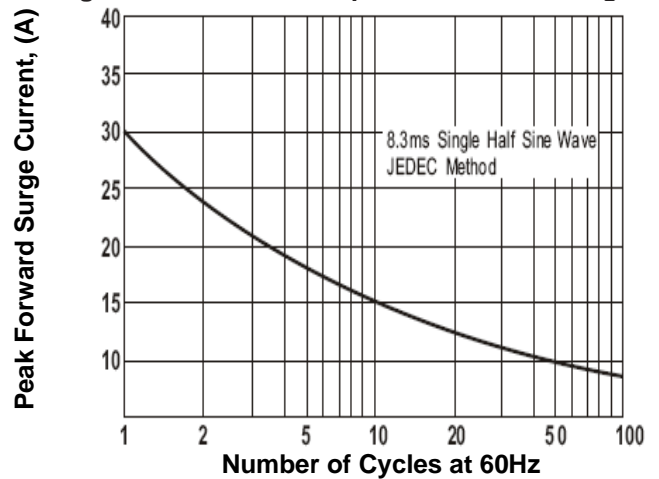


Fig.3- Typical Forward Characteristics

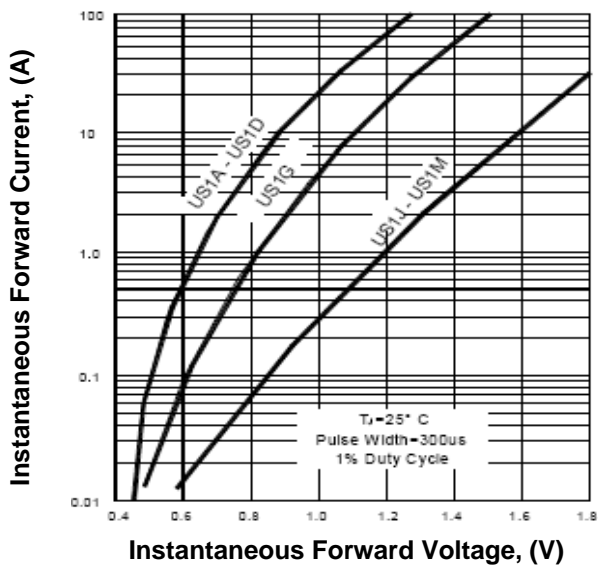


Fig.4- Typical Reverse Characteristics



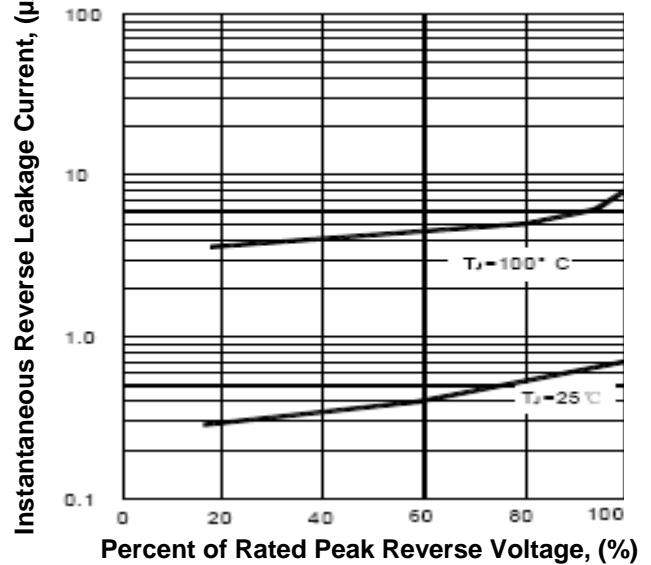


Fig.5-Typical Junction Capacitance

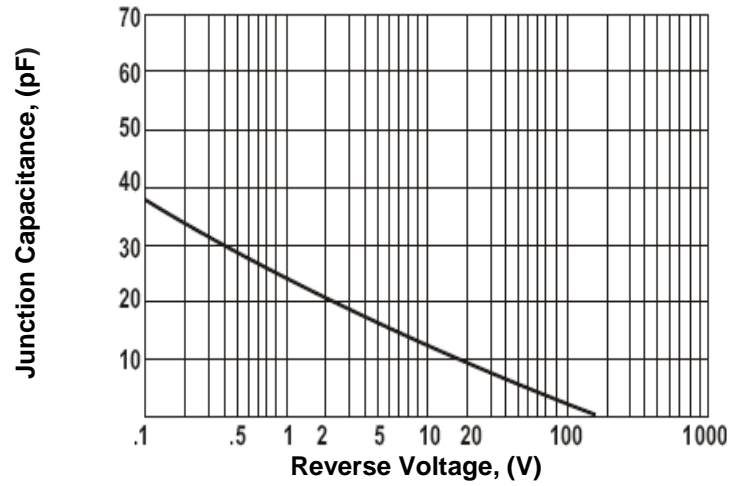

Dimensions in inches (mm)

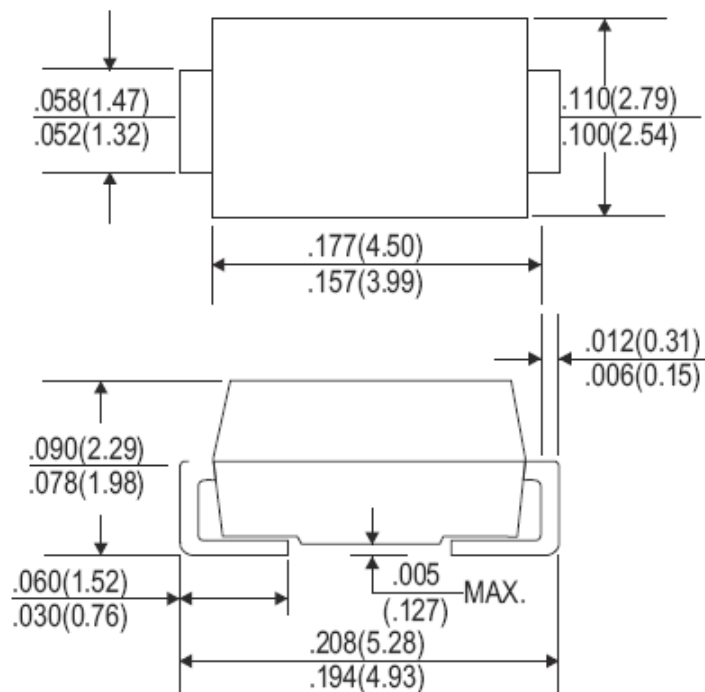

SMA (DO-214AC)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [SLKORMICRO](#) manufacturer:

Other Similar products are found below :

[D91A](#) [DA24F4100L](#) [DD89N1600K-A](#) [DD89N16K-K](#) [RL252-TP](#) [DLA11C-TR-E](#) [DSA17G](#) [1N4005-TR](#) [BAV199-TP](#) [UFS120Je3/TR13](#)
[JANS1N6640US](#) [VS-80-1293](#) [DD89N16K](#) [DD89N16K-A](#) [481235F](#) [DSP10G-TR-E](#) [067907F](#) [MS306](#) [ND104N08K](#) [SPA2003-B-D-A01](#) [VS-](#)
[80-6193](#) [VS-66-9903](#) [VGF0136AB](#) [US2JFL-TP](#) [UFS105Je3/TR13](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#) [RF301B2STL](#)
[RF501B2STL](#) [UES1306](#) [UES1302](#) [BAV199E6433HTMA1](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [JANTXV1N5660A](#) [UES1106](#) [GS2K-LTP](#)
[D126A45C](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [STTH20P035FP](#) [VS-8EWS12S-M3](#) [VS-12FL100S10](#)
[ACGRA4001-HF](#) [MUR420GP-TP](#)