


# ZM1.5C

## Silicon Planar Power Zener Diodes

LL-41

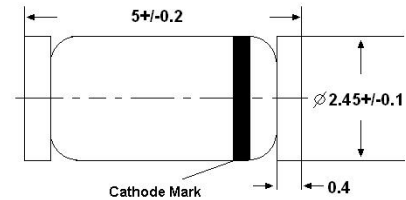

Glass case MELF  
Dimensions in mm


### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Power Dissipation	$P_{tot}$	1.5 <sup>1)</sup>	W
Junction Temperature	$T_j$	175	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 65 to + 175	$^\circ\text{C}$

<sup>1)</sup> Valid provided that electrodes are kept at ambient temperature.

### Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 200\text{ mA}$	$V_F$	1.2	V



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited




Dated : 10/09/2009

# ZM1.5C

## Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Type	Zener Voltage <sup>1)</sup>			Dynamic Resistance			Reverse Current		Maximum DC Zener Current
	$V_{Znom}$	$V_{ZT}$	at $I_{ZT}$	$Z_{ZT}$	$Z_{ZK}$	at $I_{ZK}$	$I_R$	at $V_R$	
	(V)	(V)	(mA)	Max. ( $\Omega$ )	Max. ( $\Omega$ )	(mA)	Max. ( $\mu\text{A}$ )	(V)	$I_{ZM}$ (mA)
ZM1.5C3V3	3.3	3.1...3.5	113.6	10	500	1	100	1	454
ZM1.5C3V6	3.6	3.4...3.8	104.2	9	500	1	75	1	416
ZM1.5C3V9	3.9	3.7...4.1	96.1	7.5	500	1	25	1	384
ZM1.5C4V3	4.3	4...4.6	87.2	6	500	1	5	1	348
ZM1.5C4V7	4.7	4.4...5	79.8	5	500	1	5	1.5	319
ZM1.5C5V1	5.1	4.8...5.4	73.5	4	350	1	5	2	294
ZM1.5C5V6	5.6	5.2...6	66.9	2	250	1	5	3	267
ZM1.5C6V2	6.2	5.8...6.6	60.5	2	200	1	5	4	241
ZM1.5C6V8	6.8	6.4...7.2	55.1	2.5	200	1	5	5.2	220
ZM1.5C7V5	7.5	7...7.9	50	3	400	0.5	5	6.8	200
ZM1.5C8V2	8.2	7.7...8.7	45.7	3.5	400	0.5	5	6.5	182
ZM1.5C9V1	9.1	8.5...9.6	41.2	4	500	0.5	5	7	164
ZM1.5C10	10	9.4...10.6	37.5	4.5	500	0.25	5	8	150
ZM1.5C11	11	10.4...11.6	34.1	5.5	550	0.25	1	8.4	136
ZM1.5C12	12	11.4...12.7	31.2	6.5	550	0.25	1	9.1	125
ZM1.5C13	13	12.4...14.1	28.8	7	550	0.25	1	9.9	115
ZM1.5C15	15	13.8...15.6	25	9	550	0.25	1	11.4	100
ZM1.5C16	16	15.3...17.1	23.4	10	600	0.25	1	12.2	93
ZM1.5C18	18	16.8...19.1	20.8	12	600	0.25	1	13.7	83
ZM1.5C20	20	18.8...21.2	18.7	14	650	0.25	1	15.2	75
ZM1.5C22	22	20.8...23.3	17	17.5	650	0.25	1	16.7	68
ZM1.5C24	24	22.8...25.6	15.6	19	700	0.25	1	18.2	62
ZM1.5C27	27	25.1...28.9	13.9	23	700	0.25	1	20.6	55
ZM1.5C30	30	28...32	12.5	26	750	0.25	1	22.8	50
ZM1.5C33	33	31...35	11.4	33	800	0.25	1	25.1	45
ZM1.5C36	36	34...38	10.4	38	850	0.25	1	27.4	41
ZM1.5C39	39	37...41	9.6	45	900	0.25	1	29.7	38
ZM1.5C43	43	40...46	8.7	53	950	0.25	1	32.7	34
ZM1.5C47	47	44...50	8	67	1000	0.25	1	35.8	31
ZM1.5C51	51	48...54	7.3	70	1100	0.25	1	38.8	29
ZM1.5C56	56	52...60	6.7	86	1300	0.25	1	42.6	26
ZM1.5C62	62	58...66	6	100	1500	0.25	1	44.1	24
ZM1.5C68	68	64...72	5.5	120	1700	0.25	1	51.7	22
ZM1.5C75	75	70...79	5	140	2000	0.25	1	56	20

<sup>1)</sup> Tested with pulse tp = 20 ms.



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 10/09/2009

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Zener Diodes](#) category:*

*Click to view products by [SLKORMICRO](#) manufacturer:*

Other Similar products are found below :

[MMSZ5245BS-7-F](#) [RKZ13B2KG#P1](#) [RKZ5.6B2KJ#R1](#) [EDZTE6113B](#) [EDZTE6116B](#) [EDZTE616.8B](#) [1N747A](#) [1N966B](#) [NTE5116A](#)  
[NTE5121A](#) [NTE5139A](#) [NTE5147A](#) [NTE5152A](#) [NTE5155A](#) [NTE5156A](#) [NTE5164A](#) [JANS1N4974US](#) [SMAJ4764A-TP](#) [RKZ5.1BKU#P6](#)  
[3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#) [3SMBJ5920B-TP](#) [3SMBJ5925B-TP](#) [TDZTR24](#) [441774C](#) [MMSZ4678-TP](#) [MMSZ5232BQ-13-F](#)  
[BZG04-36](#) [BZG05C9V1-HE3-TR](#) [HZM30NBTR-E](#) [UDZTE-175.1B](#) [3SMAJ5945B-TP](#) [3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#) [DL4746A-TP](#)  
[RKZ18B2KK#R1](#) [RKZ10B2KL#R1](#) [RKZ6.8B2KL#R1](#) [RKZ8.2B2KL#R1](#) [DZ2S240M0L](#) [SMAZ27-TP](#) [SMBZ5920B-E3/52](#) [ZMM3.0](#)  
[RD16UM-T1-A](#) [RD39S-T1-A](#) [RD9.1S-T1-A](#) [RD10S-T1-A](#) [RD20S-T1-A](#) [RD2.2S-T1-A](#) [RD2.7UM-T1-A](#)