

[Covered Versions Available](#)



Medical



Industrial

### FEATURES AND BENEFITS

3" x 5" x 1.35" Package	Meets Class B Radiated & Conducted EMI
130W w/air, 100W Convection Cooled	5V@1A Standby Output, Remote Inhibit
Universal Input 90-264VAC	No Minimum Load Required
Efficiency 87% Typical	>7 Year E-cap Life
Approved to CSA/EN/IEC/UL62368-1	3 Year Warranty
Approved to CSA/EN/IEC/UL60601-1, 3rd Ed. +Am1	RoHS Compliant



### MODEL SELECTION

Model Number <sup>2,3</sup>	Volts <sup>1</sup>		Output Current					Maximum Output Power		Ripple & Noise <sup>2</sup>	Total Regulation <sup>3</sup>	OVP Threshold
			200LFM air		Convection		Peak	200LFM air	Convection			
			Min	Max	Min	Max						
GB130QA	V1	5V	0A	16A	0A	12A	16A	130W	100W	1.0% pk-pk	±3%	7.5V max.
	V2	12V	0A	4A	0A	3A	5A			1.0% pk-pk	±3%	120%-140%
	V3	-12V	0A	1.2A	0A	1A	1.2A			1.0% pk-pk	±3%	120%-140%
	V4	12V	0A	1.2A	0A	1A	1.2A			1.0% pk-pk	±3%	120%-140%
GB130QC <sup>4</sup>	V1	5V	0A	16A	0A	12A	16A	130W	100W	1.0% pk-pk	±3%	7.5V max.
	V2	12V	0A	4A	0A	3A	5A			1.0% pk-pk	±3%	120%-140%
	V3	-15V	0A	1.2A	0A	1A	1.2A			1.0% pk-pk	±3%	120%-140%
	V4	15V	0A	1.2A	0A	1A	1.2A			1.0% pk-pk	±3%	120%-140%
GB130QD <sup>4</sup>	V1	5V	0A	16A	0A	12A	16A	130W	100W	1.0% pk-pk	±3%	7.5V max.
	V2	24V	0A	3A	0A	2A	5A			1.0% pk-pk	±3%	120%-140%
	V3	-12V	0A	1A	0A	1.2A	1.2A			1.0% pk-pk	±3%	120%-140%
	V4	12V	0A	1A	0A	1.2A	1.2A			1.0% pk-pk	±3%	120%-140%
GB130QE <sup>4</sup>	V1	5V	0A	16A	0A	12A	16A	130W	100W	1.0% pk-pk	±3%	7.5V max.
	V2	24V	0A	3A	0A	2A	5A			1.0% pk-pk	±3%	120%-140%
	V3	-15V	0A	1.2A	0A	1A	1.2A			1.0% pk-pk	±3%	120%-140%
	V4	15V	0A	1.2A	0A	1A	1.2A			1.0% pk-pk	±3%	120%-140%
GB130QP	V1	5V	0A	16A	0A	10A	16A	130W	100W	1.0% pk-pk	±3%	7.5V max.
	V2	24V	0A	5A	0A	4A	5A			1.7% pk-pk	+10%/-5%	120%-140%
	V3	-12V	0A	1.2A	0A	1A	1.2A			1.0% pk-pk	±3%	120%-140%
	V4	12V	0A	2A	0A	2A	2A			1.0% pk-pk	±3%	120%-140%

#### Notes:

- 5V output is adjustable with +/-10% range. Other output voltages available, consult factory.
- Measured with noise probe directly across output terminals, and load terminated with 0.1µF ceramic and 47µF low ESR capacitors. Ripple & Noise of V2 at no load is 2% maximum. All specifications are typical at 230Vac, full load, at 25°C ambient unless noted.
- Total Regulation is defined as the maximum deviation from the nominal voltage for all steady state conditions of initial voltage setting, input line voltage, and output load.
- Contact factory for availability of specific models.
- For models with optional cover/chassis, add "-C" suffix to above model numbers. Output power derates to 104W with airflow, 75W convection cooled.



### INPUT

AC Input	100-240Vac, -20, +10%, 47-63Hz, 1Ø
Input Current	115Vac: 2.0A, 230Vac: 1.5A
Inrush Current	264Vac, cold start: will not exceed 75A
Input Fuses	F1, F2: 3.15A, 250Vac fuses provided on all models
Leakage Current Earth: Patient:	<290µA@264Vac, 60Hz, NC <100µA@264Vac, 60Hz, NC, <500uA, SFC
Efficiency	87% typical at 230Vac

### ENVIRONMENT

Vibration	Operating: 0.003g <sup>2</sup> /Hz, 1.5grms overall, 3 axes, 10 min/axis Non-Operating: 0.026g <sup>2</sup> /Hz, 5.0grms overall, 3 axes, 1 hr/axis
Dimensions	W: 3.0" x L: 5.0" x H: 1.35"
Weight	300g
Turn On Time	Less than 2 sec. @115Vac (inversely proportional to input voltage and thermistor temperature)
Hold-up Time	16mS typical at 110W, 120Vac input
Operating Temperature	-20°C to +70°C
Temperature Derating	Derate output power linearly above 50°C to 50% at 70°C
Storage Temperature	-40°C to +85°C
Altitude	Operating: -500 to 15,000 ft. Non-operating: -500 to 40,000 ft.
Relative Humidity	5% to 95%, non-condensing

#### Notes:

- Spe e for convection rating at factory settings at 115 Vac input, 25°C ambient unless otherwise stated.
- For DC input an external DC safety rated fuse must be used.

### AUXILIARY SIGNALS

AC Power Fail	During normal operation, stays HIGH. Signal goes LOW with at least 6mS warning before loss of DC output from AC failure.
Remote Inhibit	Via switch closure
DC OK	During normal operation, this signal is logic HIGH. Signal will go LOW for output less than 90% (typical) of nominal. Green LED will light on PCB top side during normal operation.
5V Standby Output	5V@ 1.0A output, always present when AC input is applied to the unit.

### OUTPUT

Output Power	Open Frame: 130W continuous with 200 lfm airflow, 100W convection cooled. Covered models: 104W with airflow, 75W convection cooled.
Ripple and Noise	See models chart
Output Voltage	See models chart
Voltage Adjustability	+/-10% from nominal on 5V output
Turn On Time	Less than 2 sec. @115Vac (inversely proportional to input voltage and thermistor temperature)
Hold-up Time	16mS typical at 110W, 120Vac input
Switching Frequency	PFC: 0.9 typical
Transient Response	500µS typ. for return to within 0.5% of nominal, 50% load step. $\Delta i/\Delta t < 0.2A/\mu S$ . Max Volt Deviation = 3%

### SAFETY

Safety Standards	CSA/IEC/EN/UL62368-1 CSA/IEC/EN/UL60601-1, 3rd Ed. + Am1
------------------	---

### RELIABILITY

MTBF	250,000 hours, 25°C Ambient, 110Vac input
E-Cap Life	>7 Years in use condition of 40°C ambient, at 12h/day, 261 days/year. Additional information on other use pr available on request.
Minimum Load	See models chart
Total Regulation	See models chart

### PROTECTION

Parameter	Conditions/Description	Min	Nom	Max	Units
Input Fuse	3.15A/250V internal fuse in both line & neutral		Not user accessible		
Input Transient Protection	4KV(CM) and 2KV(DM) surge			4	KV (CM)
Short Circuit Protection	Provided - no damage will occur if the output is shorted.				Hiccup Mode
Overload Protection	150%-300% above rating for V2, V3, & V4 110%-200% for V1.				Hiccup Mode
Overvoltage Protection	Latching Type, recycle AC input to reset				See models chart for trip ranges
Shock	Operating: Half-sine, 20gpk, 10ms, 3 axes, 6 shocks total Non-Operating: Half-sine, 40 gpk, 10 ms, 3 axes, 6 shocks total				



### EMI/EMC COMPLIANCE

Conducted Emissions	EN55011/22 Class B, FCC Part 15, Subpart B, Class B with 6db margin
Radiated Emissions	EN55011/22 Class B; FCC Part 15, Subpart A, Class B
Common Mode Noise: High Frequency (100Khz -20Mhz)	<50mA pk-pk, 6mA rms CM current. See Application Note.
Common Mode Noise: Low Frequency (50-120 Hz)	<5Vrms. See Application Note.
Static Discharge Immunity	EN55024/IEC61000-4-2, Level 4, 8kV Contact Discharge, 15kV air discharge, Criteria A <sup>1</sup>
Radiated RF Immunity	EN55022/IEC61000-4-3, Level 3, 10V/m, Criteria A <sup>1</sup>
EFT/Burst Immunity	EN55024/IEC61000-4-4, Level 3, 4kV (PS Output), Criteria A; 2kV (signal outputs), Criteria B <sup>1</sup>
Line Surge Immunity	EN55024/IEC61000-4-5, Level 3, 1kV diff., 2kV Common-Mode, Criteria A <sup>1</sup> Level 4, 2kV diff., 4kV Common-mode, Criteria B <sup>1</sup>
Conducted RF Immunity	EN55022/IEC61000-4-6, Level 4, 3V/m, 0.15 to 80MHz; and 10V/m in ISM and amateur radio bands between 0.15 and 80MHz, 80%AM at 1kHz, Criteria A <sup>1</sup>
Power Frequency Magnetic Field Immunity	EN55024/IEC61000-4-8, Level 4, 30A/m, Criteria A <sup>1</sup>
Voltage Dip Immunity	EN55024/IEC61000-4-11, Dips: 100%, 10ms; 30%, 500ms; 60%, 100ms; Interruptions: 100%, 5000mS; Performance Criteria A, A, B & B <sup>1</sup>
Line Harmonic Emissions	EN55024/IEC61000-3-2, Class A.
Flicker Test	EN55024/IEC61000-3-3

#### Notes:

Performance criteria are based on EN55024. According to the standards, performance criteria are defined as following:

1. Normal performance during and after the test
2. Temporary degradation, self-recoverable
3. Temporary degradation, operator intervention required to recover the operation
4. Permanent damage


### CONNECTOR INFORMATION

Input Connector J100	DC Output Connector J102	Signal Connector J3
PIN 1) AC LINE PIN 2) EMPTY PIN 3) AC NEUTRAL	PIN 1) +V1    PIN 5) RTN    PIN 9) -V3 PIN 2) +V1    PIN 6) RTN    PIN 10) V4 PIN 3) +V1    PIN 7) RTN PIN 4) RTN    PIN 8) V2	PIN 1) Power Fail    PIN 6) 5V Standby PIN 2) DC_OK        PIN 7) 5V Standby PIN 3) INHIBIT      PIN 8) COM PIN 4) N/C            PIN 9) COM PIN 5) 5V Standby    PIN 10) COM
Connector: TE/AMP P/N 640445-3 Mating Connector: TE/AMP P/N 640250-3 Pins = 3-640252-1	Connector: TE/AMP P/N 1-640445-0 Mating Connector: TE/AMP P/N 1-640250-0 Pins = 3-640252-1	Mating Connector: Landwin P/N 2050S10 00 Pins = 2053T021 R



## MECHANICAL DRAWING

### Open Frame Models:

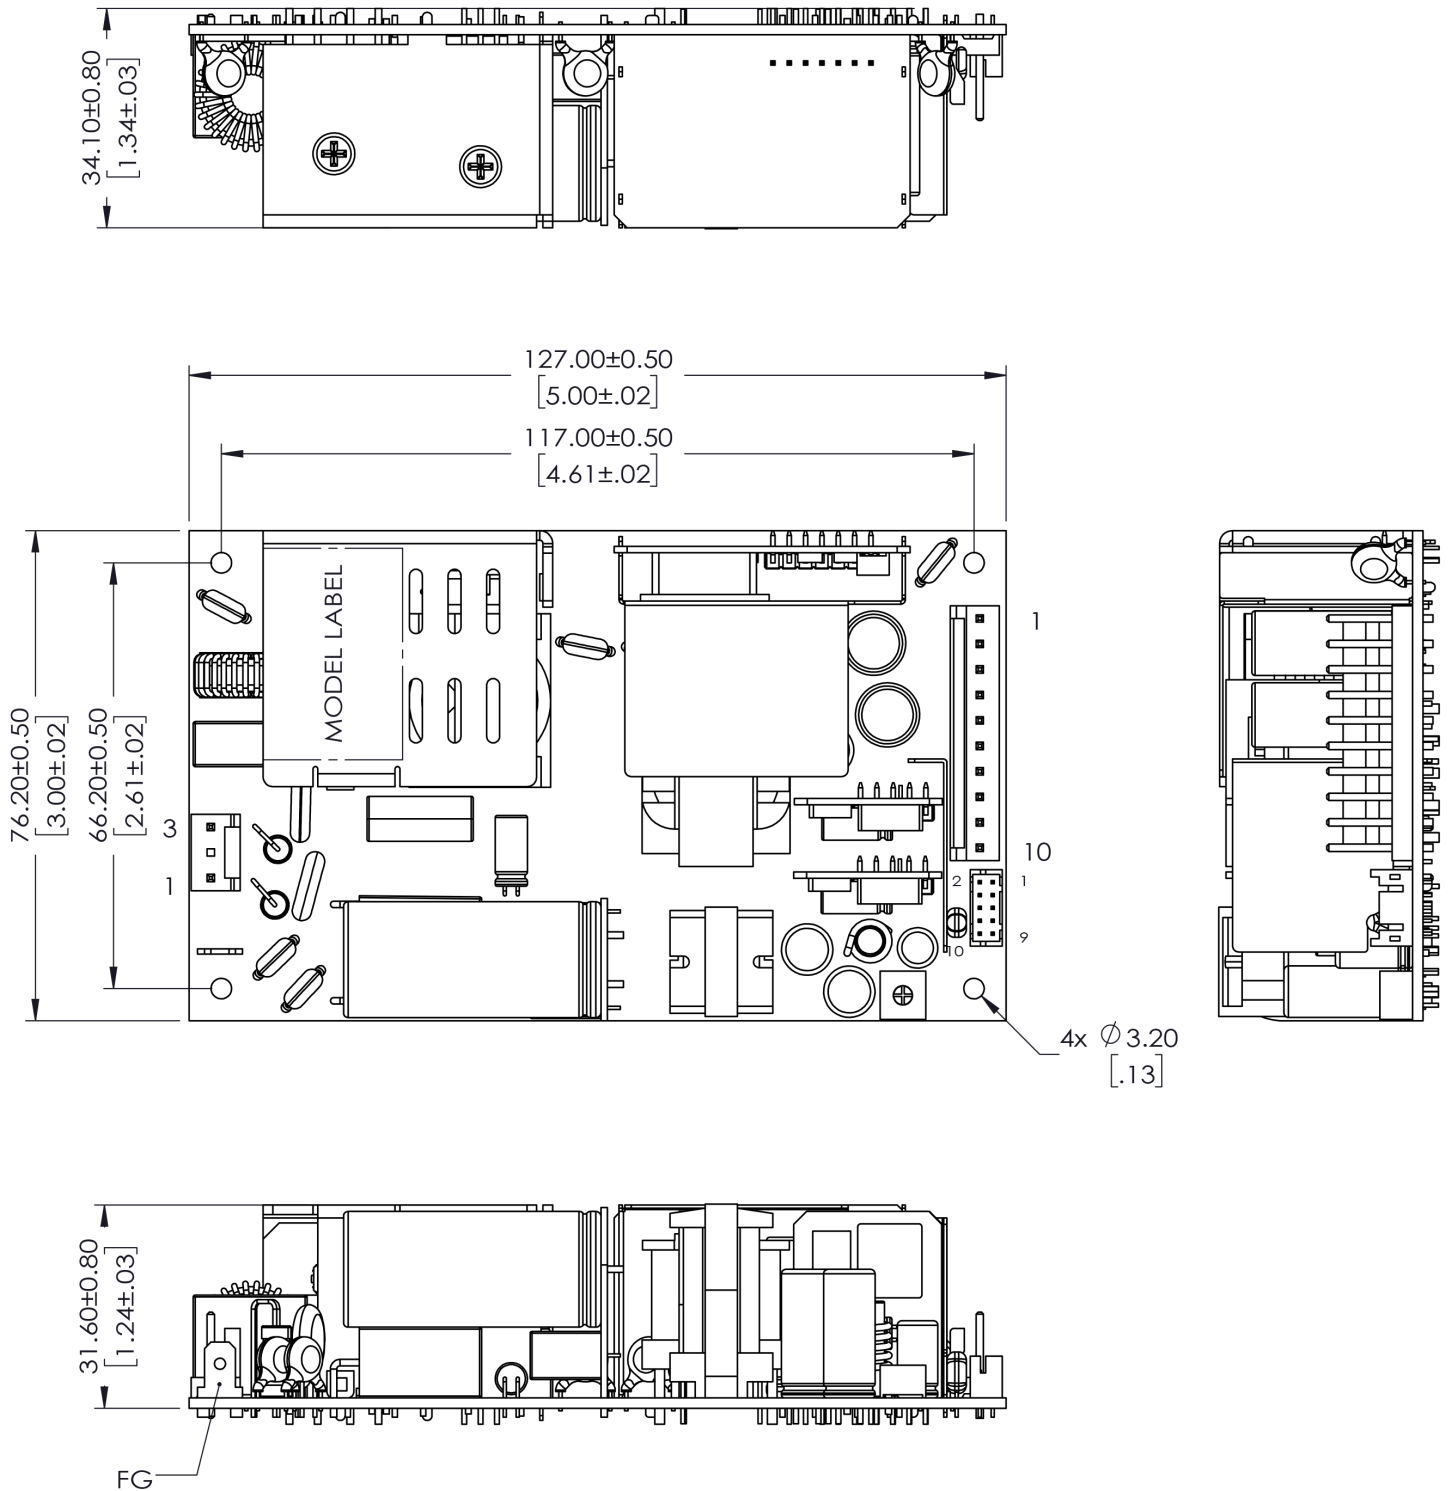






**Notes:**

1. All dimensions in inches (mm), tolerance is  $\pm .02$ ".
2. Mounting holes should be grounded for EMI purpose
3. This power supply requires mounting on metal standoffs 0.20" (5 m) in height.



### MECHANICAL DRAWING

Covered Models:

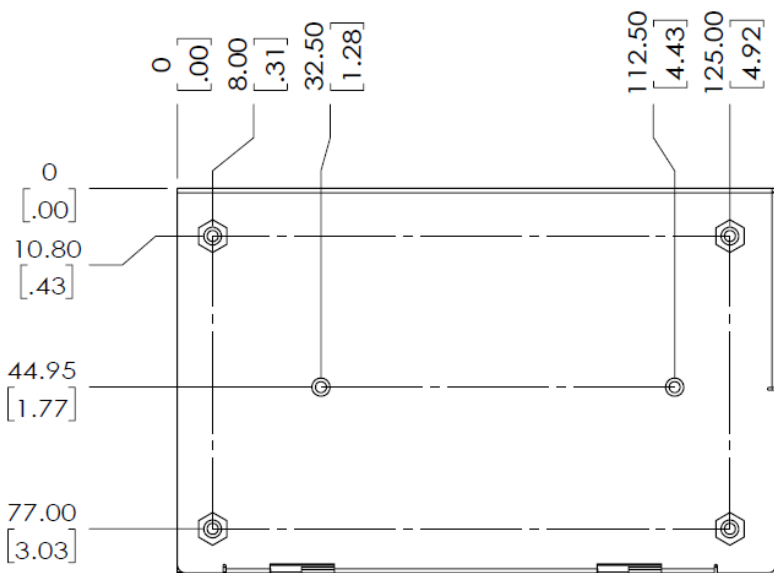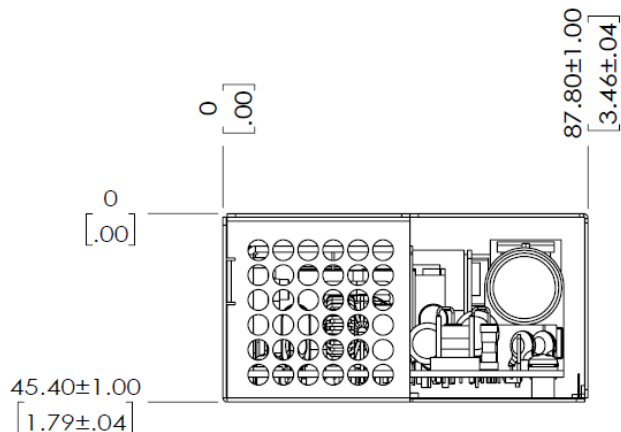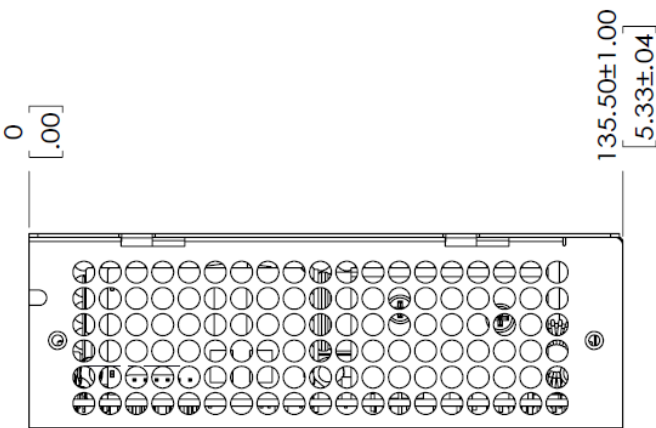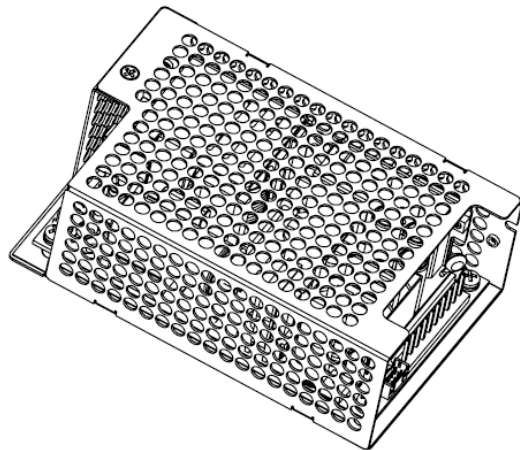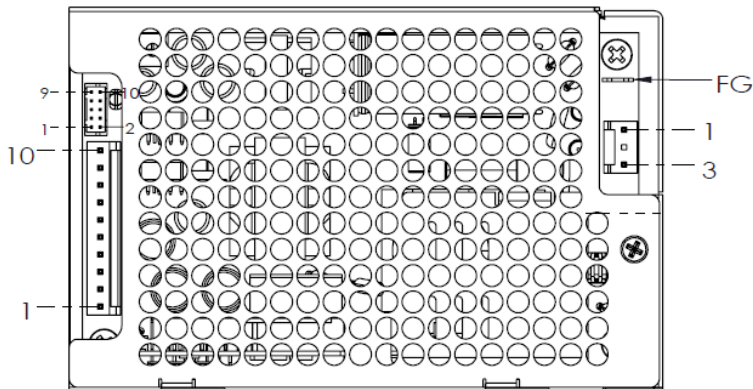



### ISOLATION SPECIFICATIONS

Parameter	Conditions/Description	Min	Nom	Max	Units
Insulation Safety Rating	Input/Ground Input/Output Output/Ground		Basic Reinforced Operational		
Electric Strength Test Voltage	Input/Ground Input/Output Output/Ground	1800 4000 500	-	-	Vac Vac Vac

### LEAKAGE CURRENT


Parameter	Conditions/Description	Max
Earth Leakage Current	Normal Condition (NC)	290 $\mu$ A
	Single Fault Condition (SFC)	420 $\mu$ A
Touch Current	Normal Condition (NC)	90 $\mu$ A
	Single Fault Condition (SFC)	170 $\mu$ A

### CHARACTERISTIC CURVES

#### Output vs. Temperature

**Open Frame:** 100W convection cooled and 130W continuous with 200 LFM airflow. Derate output power to 50% at 70C.

**Covered Versions:** Convection cooled output power is 75% of open frame ratings. Air-cooled output power is 80% of open frame ratings.

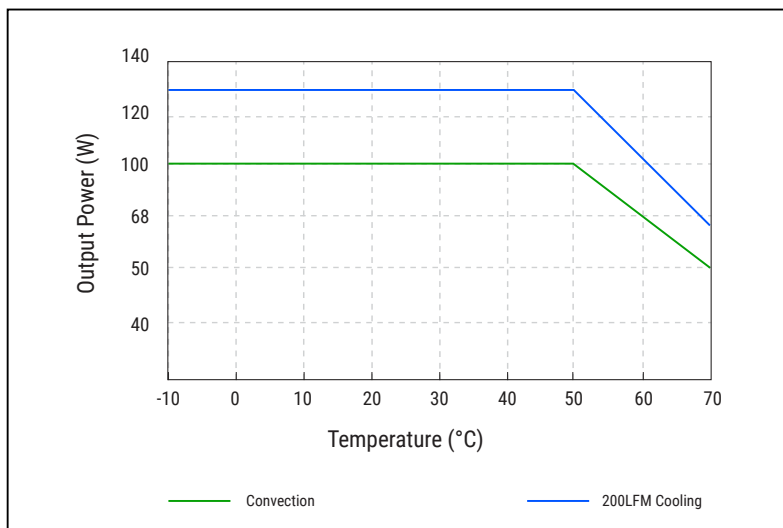

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [SL Power](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)  
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)  
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#)  
[LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-1219-](#)  
[18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-0028G](#) [VI-](#)  
[LUL-EU](#) [EP3000AC48INZ](#) [VP-C2104853](#)