



Features

- High Efficiency (up to 93%)
- Wide Range Universal Input 90-305 VAC
- Active Power Factor Correction (0.99 typical)
- Constant Voltage Output
- Lightning Protection
- Waterproof (IP67)
- Overcurrent, Overvoltage, Overtemperature Protection
- Meets UL8750, UL935 & EN61347 Safety
- SELV
- 3 Year Warranty



Description

The LE150S-VN Series operate from a 90 ~ 305Vac input range. These units will provide up to a 150W of output power. They are designed to be highly efficient and highly reliable. The standard features include lightning protection, overvoltage protection, short circuit protection, and over temperature protection.

Model Selection

Model Number	Output Current	Output Voltage	Efficiency*		Ripple & Noise**	Regulation		Overvoltage Trip Level
			110Vac	220Vac		Line	Load	
LE150S24VN	0 – 6.25A	24Vdc	89%-90%	92%-93%	2% of Vo pk-pk	±1%	±2%	110% - 130% of Vo
LE150S48VN	0 – 3.13A	48Vdc	89%-90%	92%-93%	2% of Vo pk-pk	±1%	±2%	110% - 130% of Vo

Notes: 1. Efficiency measured at full load, at input voltage noted.
2. Measured at 20MHz bandwidth, with noise probe directly across output terminals, and load terminated with 0.1µF ceramic and 10µF low ESR electrolytic capacitors.

General Specifications

AC Input	90-305Vac, 47-63Hz, 1Ø	Turn On Time	1.5 seconds, max.
Input Current	100Vac: 1.75A, 220Vac: 0.8A	Hold-up Time	20 mSec
Inrush Current	230Vac, cold start: will not exceed 65A	Dimming Function	N/A
Input Fuses	XA, 250VAC fuses provided on all models	Overload Protection	110%-180% of Io rated, Hiccup Mode



General Specifications (continued)

Earth Leakage Current	<1.0mA@277Vac, 50Hz	Short Circuit Protection	Provided - no damage to unit, self-recovery.
Efficiency	See Models chart.	Overvoltage Protection	Latch mode. AC input will need to be reset to return to normal operation after an OVP condition. See chart for trip range.
Output Power	150W continuous	Overtemperature Protection	Latch mode. AC input will need to be reset to return to normal operation after an OTP condition. Trip Temperature = 110°C typical.
Ripple and Noise	See chart	Operating Temperature	Operating: -35°C to +70°C Non-operating: -40°C to +85°C
Output Voltage	See chart	Relative Humidity	10% to 100% operating 5% to 100%, non-operating
Total Regulation	+/- 3%. See chart	Safety Standards	UL8750, UL935, UL1012, CSA-C22.2 No. 0, No. 107.1, & No. 250.0, EN61347-1, EN61347-2-13
Dimensions	W: 3.13" x L: 9.37" x H: 1.81"	MTBF	261,000 hours (110Vac input, 80% load, 25°C ambient, per MIL-HDBK-217F).
Weight	1500g	Lifetime	78,000 hours (220Vac input, 80% load, 60°C case temperature).


EMI/EMC Compliance

Emissions	EN55015, Radiated & Conducted
EMI for Lighting Equipment	EN61547
Static Discharge Immunity	EN61000-4-2, 4kV Contact Discharge, 8kV air discharge
Radiated RF Immunity	EN61000-4-3
EFT/Burst Immunity	EN61000-4-4
Line Surge Immunity	EN61000-4-5, 4kV line-line, 6kV line-earth
Conducted RF Immunity	EN61000-4-6
Power Frequency Magnetic Field Immunity	EN61000-4-8
Voltage Dip Immunity	EN61000-4-11
Line Harmonic Emissions	EN61000-3-2
Flicker Test	EN61000-3-3

Derating Curves

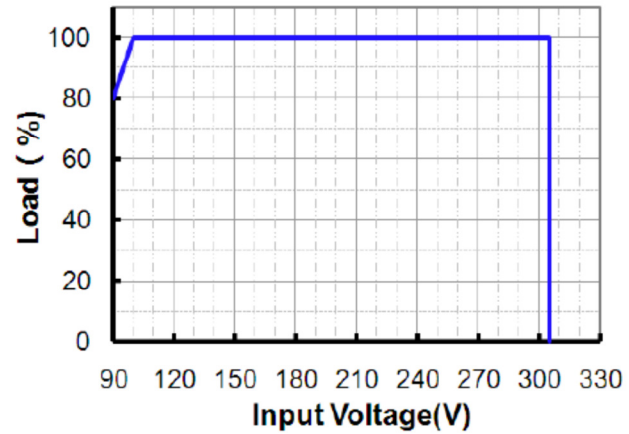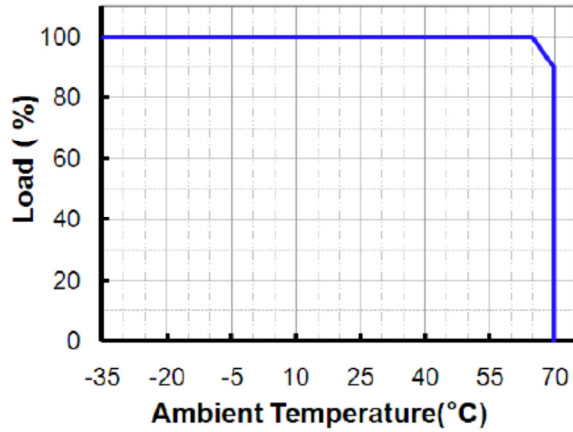

Mechanical Drawing

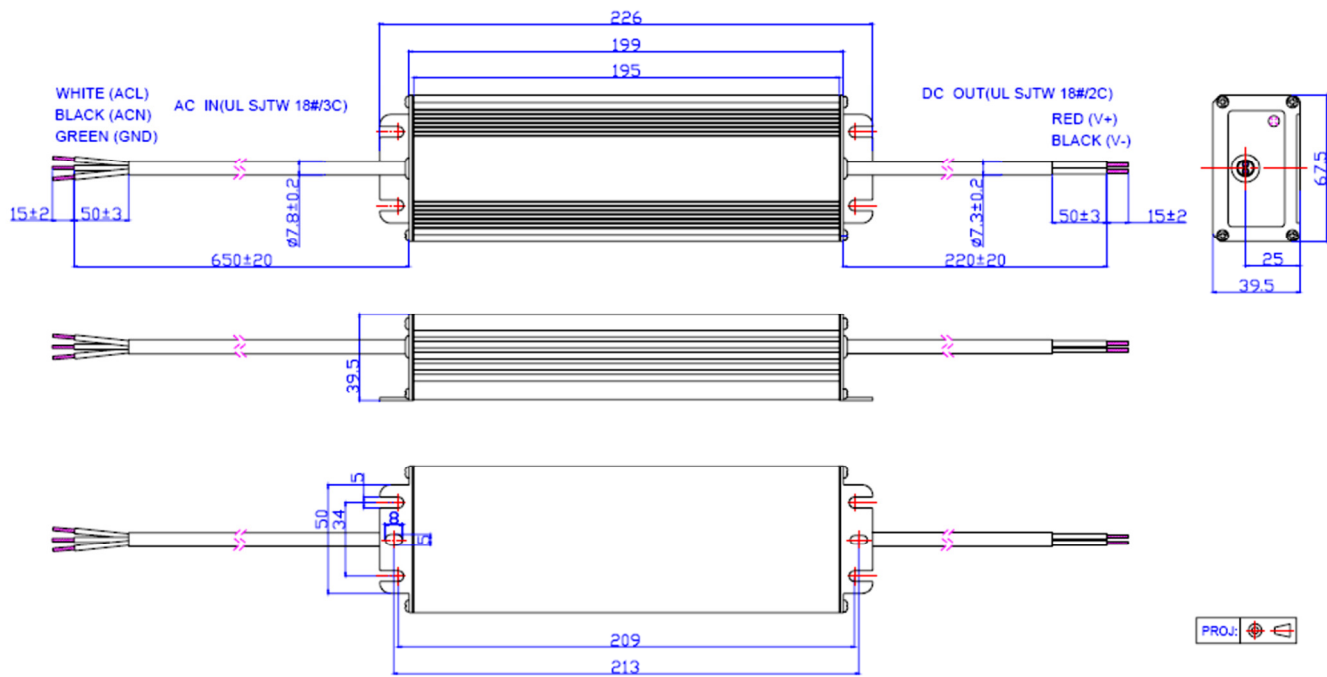

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [SL Power](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#)
[EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#)
[PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-](#)
[ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#)
[LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA](#)
[FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 50W 200-350ML 170V FLEXC LP](#)
[SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#)
[LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC](#)
[34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#)