

PW173

Universal 20-32 Watt Series



ITE / Switch Mode Power Supply

3 Year Warranty

- 100-250 VAC Universal Input
- Desktop and Wall Plug Style
- Single Output to 32W
- Seven Models Available; 5V to 48V
- Regulated Output with Low Ripple
- Impact Resistant Polycarbonate Enclosure
- Modified and Custom Designs
- No Load Power Consumption < 0.75W
- Meets ENERGY STAR Program Requirements see reverse side for details



International Safety Standard Approvals



Specifications

Output Specifications

Line and Load Voltage Regulation	Excluding cord	+/-1%
Ripple		1% Vp-p max.
Transient Response		0.5ms for 50% Load change Typical
Protection		Over-current Protection (Hiccup) Short Circuit Protection

Input Specifications

Input Voltage Range	Universal input	100-250VAC -10%, +6%
Line Frequency		47-63Hz
Input Current	90VAC Input	1.0A max.
Protection		Internal Primary Current Fuse, Inrush Limiting

Environmental Specifications

Thermal Performance	Operating temperature full load, no derating convectional cooling Non vented case	0° C to 40° C
Relative Humidity	Non-condensing	5% to 95%
Altitude		0-10,000 feet

General Specifications

Topology		Switching-Fixed Frequency Flyback
Efficiency	5V 9V to 48V	70% min. 78% min.
Hold-up Time	@120VAC	18ms min.
Dielectric Withstand		3,000VAC, 4,250VDC Primary-Secondary
Storage Temp		-30° C to 85° C
Approvals and Safety Standards		UL60950-1, IEC/EN60950-1 EMC : EN55022 / 55024 61000
MTBF		100,000 Calculated Hours Minimum.
Case and Dimension		LP4N 3.74L x 2.13W x 1.26H (in) 95.0L x 54.0W x 32.0H (mm)
Case Material		Black 94V0 Polycarbonate
Cord and Connectors		6ft. 2 Conductor, 18AWG, AULT#3 Connector. Other connectors are also available.

PW173

Universal 20-32 Watt Series

ITE / Switch Mode Power Supply

For the most current data and application support visit www.slpower.com

Ault Part Number	Output Voltage	Output Currents		Max Watts	Ripple Vp-p max.
		Min	Max		
PW173KA05XX*	5 V	0.00 A	4.00 A	20.0 W	50 mV
PW173KA09XX	9 V	0.00 A	3.00 A	27.0 W	90 mV
PW173KA12XX	12 V	0.00 A	2.50 A	30.0 W	120 mV
PW173KA15XX	15 V	0.00 A	2.00 A	30.0 W	150 mV
PW173KA18XX	18 V	0.00 A	1.67 A	30.1 W	180 mV
PW173KA24XX	24 V	0.00 A	1.33 A	31.9 W	240 mV
PW173KA48XX	48 V	0.00 A	0.67 A	32.2 W	480 mV

Ault Part Number Key

PW173	K	A	03	XX
Product Family Name	Manufacturing Location	Design Revision Changes	Voltage DC	Connector Number

Input Configuration



IEC320
w/ground
C14
(F)



IEC320
w/o ground
C18
(Q)



Shaver
C8
(N)



N. America/
Japan
(B)




Europe
(M)



United
Kingdom
(G)

Specify the Input Configuration Code in your order.

Pin Connections

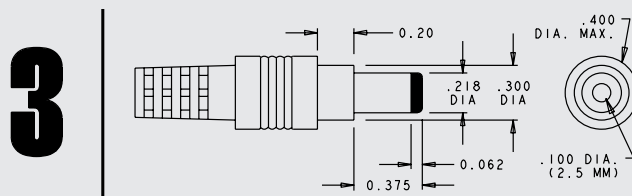

Pinout Code	Center contact: positive
Description	Switchcraft 760 plug or equivalent
Suggested Mating	Switchcraft 712A jack or equivalent
Other Connectors are available by special order	

Energy Star Specifications

Power Supplies that are single voltage external AC to DC and AC to AC included with other retail products and single voltage external AC to DC or AC to AC power supplies sold separately; and consumer audio and video equipment, which includes compact audio products, DVD players and recorders as well as television adapters. (Please refer to the reverse side of data sheet for specifications and marking protocol.)

Energy-Efficiency Criteria for Active Mode

To be eligible for ENERGY STAR qualification, an external power supply must meet or exceed a minimum efficiency for Active Mode, which varies based on the model's nameplate output power. The table below outlines the equations for determining minimum average efficiency.

Nameplate Output Power	Minimum Average Efficiency in Active Mode
0 to ≤ 1 watt	≥ 0.49 * P _{no}
> 1 to ≤ 49 watts	≥ [0.09 * Ln (Nameplate Output)] + 0.49
> 49 watts	≥ 0.84

Energy Consumption Criteria for No Load

The second half of the ENERGY STAR specification is the No-Load power requirement, which specifies the maximum AC power that may be used by a qualifying external power supply in the No-Load condition. Maximum power consumption levels for No-Load Mode are provided below.

Nameplate Output Power	Maximum Power in No-Load
0 to < 10 watts	≤ 0.5 watts
≥ 10 to ≤ 250 watts	≤ 0.75 watts

*Does not meet Energy Star requirements



SL Power Electronics Corp • 6050 King Drive • Ventura CA, 93003 • Phone:805.486.4565 • Fax:805.487.8911 • Email:info@slpower.com • www.slpower.com

Data Sheet © 2006 SL Power Electronics Corp. The information and specifications contained in this data sheet are believed to be correct at time of publication.

However, SL Power accepts no responsibility for consequences arising from reproduction errors or inaccuracies. Specifications are subject to change without notice.

Rev.9/22/06

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Desktop AC Adapters](#) category:

Click to view products by [SI Power](#) manufacturer:

Other Similar products are found below :

[YS50-1903150](#) [ADP-40KD BBBM](#) [DTA27-3X-W-5](#) [212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [212A2220-02](#) [212A2220-04](#)
[FWE030015A-10A](#) [TRH100A135-02E12-Level-VI](#) [TRH100A180-11E13-Level-VI](#) [TRH100A240-01E13-Level-VI](#) [TRH100A280-01E13-](#)
[Level-VI](#) [TRH100A280-11E13-Level-VI](#) [TRH50A120-02E01-Level-VI](#) [TRH50A120-12E01-Level-VI](#) [TRH50A120-40E01-Level-VI](#)
[TRH50A150-12E12-Level-VI](#) [TRH50A180-11E03-Level-VI](#) [TRH50A240-02E03-Level-VI](#) [TRH70A120-11E01-Level-VI](#) [TRH70A150-](#)
[12E02-Level-VI](#) [TRH70A240-11E03-Level-VI](#) [416FG41017](#) [DTA27-0512FWX-W3](#) [TRH100A120-02E12-Level-VI](#) [TRH100A150-11E12-](#)
[Level-VI](#) [TRH100A180-02E13-Level-VI](#) [TRH100A240-02E13-Level-VI](#) [TRH100A240-36E13-Level-VI](#) [TRH100A280-12E13-Level-VI](#)
[TRH100A480-11E13-Level-VI](#) [TRH100A480-12E13-Level-VI](#) [TRH50A120-11E01-Level-VI](#) [TRH50A120-49E01-Level-VI](#) [TRH50A150-](#)
[11E02-Level-VI](#) [TRH50A150-12E02-Level-VI](#) [TRH70A120-01E01-Level-VI](#) [TRH70A480-02E03-Level-VI](#) [KR8-PS01](#) [1894875](#)
[FWE030012A-10A](#) [FWE050024B-10A](#) [820A4080G](#) [825A0052-03](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#)