



1.5KE SERIES TRANSIENT VOLTAGE SUPPRESSOR

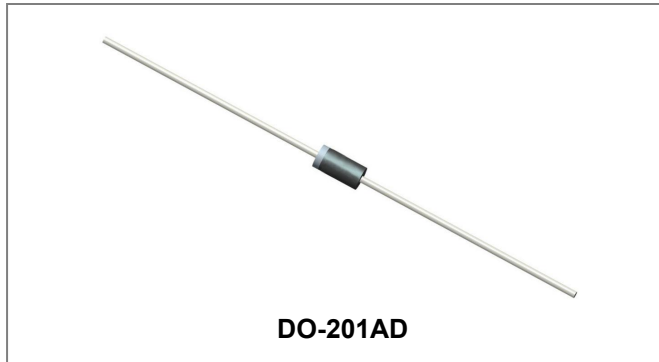

Features

- Glass Passivated Die Construction
- 1500W Peak Pulse Power Dissipation
- 6.8V- 550V Standoff Voltage
- Uni- and Bi-Directional Versions Available
- Excellent Clamping Capability
- Fast Response Time
- Plastic Case Material has UL Flammability Classification Rating 94V-0
- This is a Pb – Free Device
- All SMC Parts are Traceable to the Wafer Lot
- Additional testing can be offered upon request

Circuit Diagram

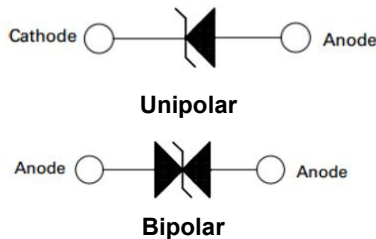

Mechanical Data

- Case: JEDEC DO-201AD Low Profile Molded Plastic
- Terminals: Axial Leads, Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band or Cathode Notch
- Weight: 1.10 grams(approx.)

Maximum Ratings and Thermal Characteristics@T_A=25°C unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation at T _A =25°C (Fig.1)(Note 1, 2, 5)	P _{PPM}	1500	W
Peak Forward Surge Current (Note 3)	I _{FSM}	200	A
Steady State Power Dissipation(Note 2, 4)	P _{M(AV)}	5.0	W
Typical Thermal Resistance Junction to Lead	R _{θJL}	15	°C/W
Typical Thermal Resistance Junction to Ambient	R _{θJA}	75	°C/W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-65 to 175	°C

- Notes:**
1. Non-repetitive current pulse, per Fig. 3 and derated above T_A = 25°C per Fig. 2.
 2. Mounted on 20mm² copper pad.
 3. Measured on 8.3ms single half sine wave or equivalent square wavefor unidirectional device only.
 4. Lead temperature at 75°C=T_L.
 5. Peak pulse power waveform is 10x1000 μ s.

Electrical Characteristics @T_A=25°C unless otherwise specified

UNI-POLAR	BI-POLAR	REVERSE STAND-OFF VOLTAGE VRWM (V)	BREAKDOWN VOLTAGE VBR (V) MIN. @IT	BREAKDOWN VOLTAGE VBR (V) MAX. @IT	TEST CURRE NT IT(MA)	MAXMUM CLAMPING VOLTAGE @IPP VC(V)	PEAK PULSE CURRENT IPP(A)	REVERSE LEAKAGE @VRWM IR(uA)
1.5KE6.8A	1.5KE6.8CA	5.8	6.45	7.14	10	10.5	144.8	1000
1.5KE7.5A	1.5KE7.5CA	6.4	7.13	7.88	10	11.3	134.5	500
1.5KE8.2A	1.5KE8.2CA	7.02	7.79	8.61	10	12.1	125.6	200
1.5KE9.1A	1.5KE9.1CA	7.78	8.65	9.5	10	13.4	113.4	50
1.5KE10A	1.5KE10CA	8.55	9.5	10.5	1	14.5	104.8	10
1.5KE11A	1.5KE11CA	9.4	10.5	11.6	1	15.6	97.4	5
1.5KE12A	1.5KE12CA	10.2	11.4	12.6	1	16.7	91	5
1.5KE13A	1.5KE13CA	11.1	12.4	13.7	1	18.2	83.5	5
1.5KE15A	1.5KE15CA	12.8	14.3	15.8	1	21.2	71.7	5
1.5KE16A	1.5KE16CA	13.6	15.2	16.8	1	22.5	67.6	5
1.5KE18A	1.5KE18CA	15.3	17.1	18.9	1	25.2	60.3	5
1.5KE20A	1.5KE20CA	17.1	19	21	1	27.7	54.9	5
1.5KE22A	1.5KE22CA	18.8	20.9	23.1	1	30.6	49.7	5
1.5KE24A	1.5KE24CA	20.5	22.8	25.2	1	33.2	45.8	5
1.5KE27A	1.5KE27CA	23.1	25.7	28.4	1	37.5	40.5	5
1.5KE30A	1.5KE30CA	25.6	28.5	31.5	1	41.4	36.7	5
1.5KE33A	1.5KE33CA	28.2	31.4	34.7	1	45.7	33.3	5
1.5KE36A	1.5KE36CA	30.8	34.2	37.8	1	49.9	30.5	5
1.5KE39A	1.5KE39CA	33.3	37.1	41	1	53.9	28.2	5
1.5KE43A	1.5KE43CA	36.8	40.9	45.2	1	59.3	25.6	5
1.5KE47A	1.5KE47CA	40.2	44.7	49.4	1	64.8	23.5	5
1.5KE51A	1.5KE51CA	43.6	48.5	53.6	1	70.1	21.7	5
1.5KE56A	1.5KE56CA	47.8	53.2	58.8	1	77	19.7	5
1.5KE62A	1.5KE62CA	53	58.9	65.1	1	85	17.9	5
1.5KE68A	1.5KE68CA	58.1	64.6	71.4	1	92	16.5	5
1.5KE75A	1.5KE75CA	64.1	71.3	78.8	1	103	14.8	5
1.5KE82A	1.5KE82CA	70.1	77.9	86.1	1	113	13.5	5
1.5KE91A	1.5KE91CA	77.8	86.5	95.5	1	125	12.2	5
1.5KE100A	1.5KE100CA	85.5	95	105	1	137	11.1	5
1.5KE110A	1.5KE110CA	94	105	116	1	152	10	5
1.5KE120A	1.5KE120CA	102	114	126	1	165	9.2	5
1.5KE130A	1.5KE130CA	111	124	137	1	179	8.5	5
1.5KE150A	1.5KE150CA	128	143	158	1	207	7.3	5
1.5KE160A	1.5KE160CA	136	152	168	1	219	6.9	5
1.5KE170A	1.5KE170CA	145	162	179	1	234	6.5	5
1.5KE180A	1.5KE180CA	154	171	189	1	246	6.2	5
1.5KE200A	1.5KE200CA	171	190	210	1	274	5.5	5
1.5KE220A	1.5KE220CA	185	209	231	1	328	4.6	5
1.5KE250A	1.5KE250CA	214	237	263	1	344	4.4	5
1.5KE300A	1.5KE300CA	256	285	315	1	414	3.7	5
1.5KE350A	1.5KE350CA	300	332	368	1	482	3.2	5
1.5KE400A	1.5KE400CA	342	380	420	1	548	2.8	5
1.5KE440A	1.5KE440CA	376	418	462	1	602	2.5	5
1.5KE480A	1.5KE480CA	408	456	504	1	658	2.3	5
1.5KE510A	1.5KE510CA	434	485	535	1	698	2.1	5
1.5KE530A	1.5KE530CA	450	503.5	556.5	1	725	2.1	5
1.5KE540A	1.5KE540CA	459	513	567	1	740	2	5
1.5KE550A	1.5KE550CA	467	522.5	577.5	1	760	2	5

For bidirectional type having V_{RWM} of 10 volts and less, the IR limit is double.
For parts without A, the VBR is $\pm 10\%$.

Ratings and Characteristics Curves

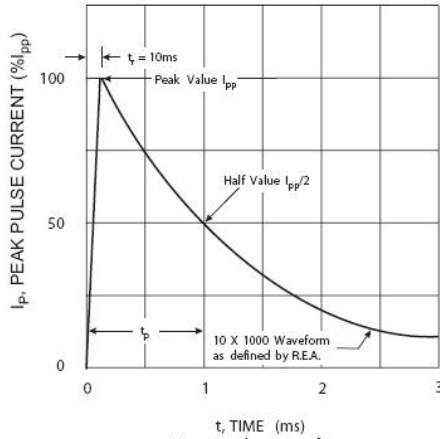


Fig. 1 Pulse Waveform

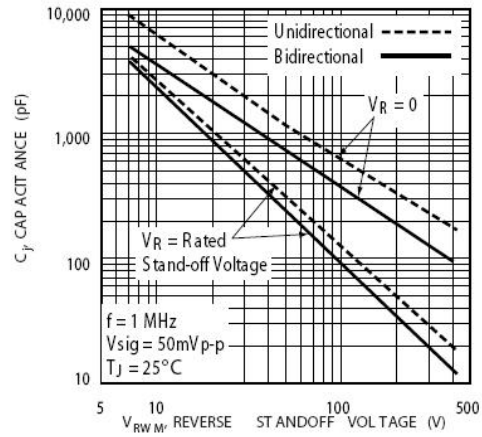


Fig. 2 Typical Junction Capacitance

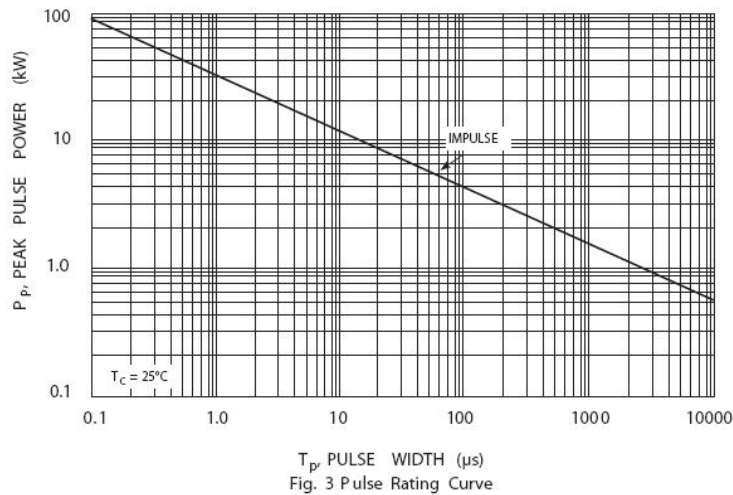


Fig. 3 Pulse Rating Curve

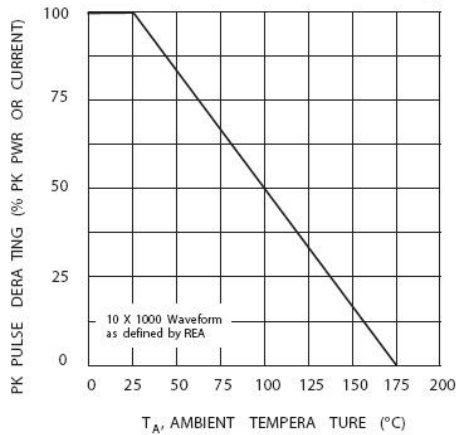


Fig. 4 Pulse Derating Curve


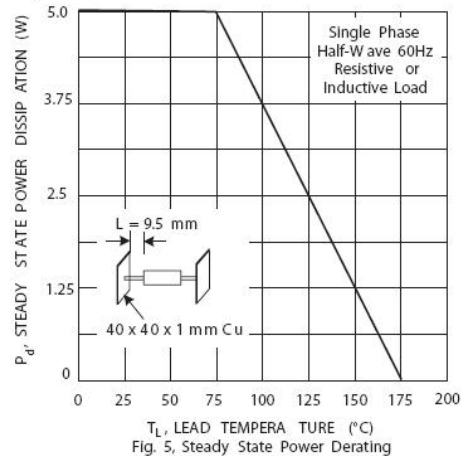


Fig. 5 Steady State Power Derating

Mechanical Dimensions DO-201AD

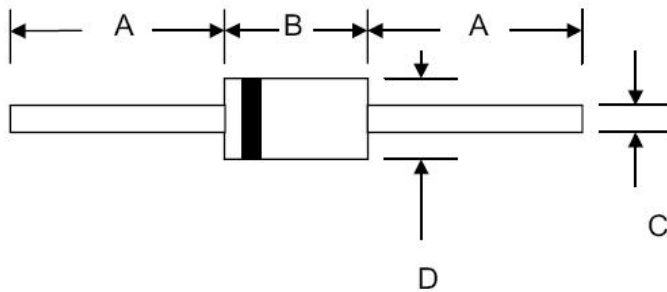


SYMBOL	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	24.0	-	0.945	-
B	7.20	9.50	0.265	0.374
C	0.96	1.07	0.038	0.042
D	4.80	5.30	0.190	0.210

Ordering Information

Device	Package	Shipping
1.5KE SERIES	DO-201AD (Pb-Free)	1250pcs / tape
1.5KE SERIES	DO-201AD (Pb-Free)	1250pcs / tape


For information on tape and reel specifications, including part orientation and tape sizes, please refer to our tape and reel packaging specification.

Marking Diagram

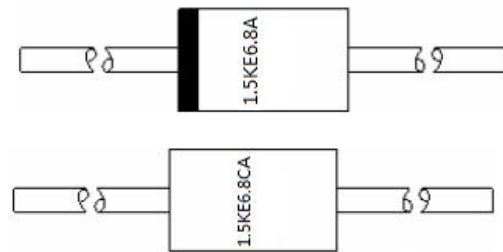

1.5KE6.8A/1.5KE6.8CA = Part Name
Note: Starting from the 16XXX will not mark date code.

Carrier Tape Specification DO-201AD

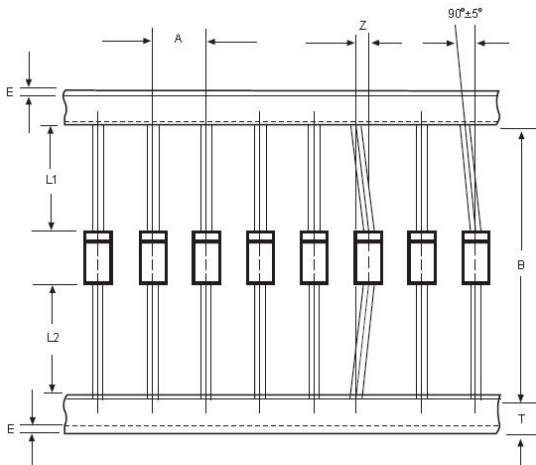

SYMBOL	Millimeters	
	Min.	Max.
A	9.50	10.50
B	50.9	53.9
Z	-	1.20
T	5.60	6.40
E	-	0.80
IL1-L2I	-	1.0

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC Diode Solutions sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall SMC Diode Solutions be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC Diode Solution assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall SMC Diode Solutions be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC Diode Solutions.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC Diode Solutions.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [SMC Diode](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-](#)
[HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)
[MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#)