
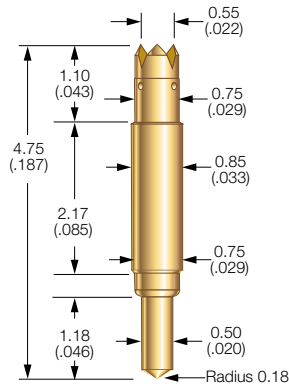


1.00MM & 1.27MM PITCH Semiconductor Probes

623-0117 PROBE



PROBE SPECIFICATIONS

Minimum Device Pitch: 1.00mm (.039)
Signal Path Length: 3.90mm (.154)
Force per Contact: 35.5g (1.25 oz.) @ 0.85mm (.033) travel
Device Compliance: 0.45mm (.018)
DUT Board Compliance: 0.40mm (.016)
Operating Temperature: -55°C to 120°C
Insertions: > 500,000

MATERIALS

Barrel: Phosphorous bronze, gold plating
Spring: Music wire, gold plated
Device Side Contact: Full-hard beryllium copper, gold plated
Board Side Contact: Full-hard beryllium copper, gold plated

ELECTRICAL SPECIFICATIONS



Typical Resistance: < 60 mΩ
Current Carrying Capacity: 3 amps continuous
 (Current DC carry capability @ 80° C steady state)
Pattern 2a: R S R @ 1.27mm pitch
Characteristic Impedance: 43 Ω
Time Delay: 24 pSec
Loop Inductance: 1.02 nH
Signal Pin to Return Capacitance: 0.56 pF
-1 dB Insertion Loss Bandwidth: > 20 GHz

HOW TO ORDER

Part No.	Device Side Tip	PCB Side Tip
623-0117-02	0.55 4-pt Crown	Conical

Prolonged exposure of greater than one hour reduces the maximum operating temperature of music wire springs to 85°C.

100785 PROBE

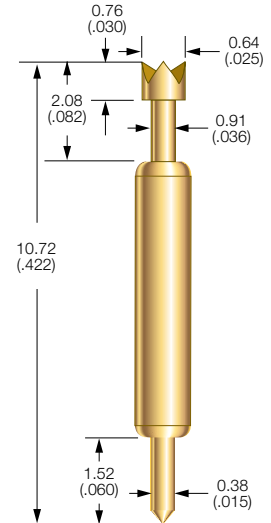

PROBE SPECIFICATIONS

Minimum Device Pitch: 1.27mm (.050)
Signal Path Length: 9.2mm (.362)
Force per Contact: 42.5g (1.5 oz.) @ 1.52mm (.060) travel
Device Compliance: 0.76mm (.030)
DUT Board Compliance: 0.76mm (.030)
Operating Temperature: -55°C to 150°C
Insertions: > 250,000

MATERIALS

Barrel: Full-hard beryllium copper, gold plated
Spring: Stainless steel, gold plated
Device Side Contact: Full-hard beryllium copper, gold plated
Board Side Contact: Full-hard beryllium copper, gold plated

ELECTRICAL SPECIFICATIONS

Typical Resistance: < 50 mΩ
Carrying Capacity: 3 amps continuous
 (Current DC carry capability @ 80° C steady state)
Pattern 2a: R S R @ 1.27mm pitch
Characteristic Impedance: 41 Ω
Time Delay: 47 pSec
Loop Inductance: 1.93 nH
Signal Pin to Return Capacitance: 1.15 pF
-1 dB Insertion Loss Bandwidth: > 16.2 GHz

HOW TO ORDER

Part No.	Device Side Tip	PCB Side Tip
100785-002	.064 4-pt. Crown	Conical
100785-003	90° Concave	Conical

Specifications subject to change without notice. Dimensions in millimeters (inches)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Contact Probes](#) category:

Click to view products by [Smiths Interconnect](#) manufacturer:

Other Similar products are found below :

[CT5253](#) [CT5082](#) [100039-033-958](#) [100077-003-0-0](#) [300122-031-1102](#) [R-2-RP-375](#) [S-4-C-5-G S/C](#) [300122-056-0203](#) [SS-75-B-2.4-G](#) [ICT-100-J-17-G](#) [SS-75-C-4.9-D D/C .620 OAL](#) [100165-033-952](#) [100024-002-942](#) [SS-75-E-4.9-D D/C .620 OAL](#) [SX-0-U-2.2-G D/C](#) [101740-028-948](#) [ICT-100-V8-8-G S/C](#) [ICT-100-A-8-G S/C](#) [ICT-075-B-10-G-S S/C](#) [S-2-D-8.3-G D/C](#) [S-2-D-10-G D/C](#) [GSS-19-7-G S/C OAL](#) [ICT-100-T-8-G S/C](#) [GSS-4-7-G](#) [S-0-B9-2.5-G S/C](#) [SS-40-J-2.4-G D/C](#) [S-0-A-2.2-D 660 S/C](#) [SS-50-J-3.3-D S/C](#) [S-0-V-3.7-G S/C](#) [SX-2-B-7-G D/C](#) [SX-1-U-6.6-G D/C](#) [SX-1-C-6.6-G D/C](#) [SS-75-D-4.9-D D/C .620 OAL](#) [SS-50-E-2.9-G S/C](#) [SS-40-J-1.8-G-N/L D/C](#) [SS-3-7-G S/C W/HOLE .373 OAL](#) [SS-18-7-G S/C W/HOLE .405 OAL](#) [SS-10-7-G S/C W/HOLE .373 OAL](#) [SS-1-7-G S/C W/HOLE .385 OAL](#) [SHE-5-H-18.7-G](#) [SHE-5-B-18.7-G](#) [SHE-5-A-18.7-G](#) [SHE-3-A-7-G](#) [SH-4-A-10-G S/C](#) [101057-001-952](#) [S-50C-HS-4.3-DG-S](#) [S-5-F-8-G S/C SS SPGS](#) [S-5-F-16.4-G S/C](#) [S-4-E-5-D S/C](#) [S-2-J-8.3-G D/C](#)