


# D Series Connectors

Quick disconnect circular plastic connectors



# Hypertac® Hyperboloid Technology

Smiths Interconnect offers an extensive range of superior contact technologies suitable for standard and custom solutions. Hypertac® (HYPERboloid cONTACT) is the original superior performing hyperboloid contact technology designed for use in all applications and in harsh and demanding environments where high reliability and safety are critical. The inherent electrical and mechanical characteristics of the Hypertac hyperboloid contact ensures unrivalled performance in terms of reliability, number of mating cycles, low contact force and minimal contact resistance. The contact sleeve is formed by wires, in a hyperboloid geometry, which align themselves elastically as contact lines around the pin, providing a number of linear contact paths.

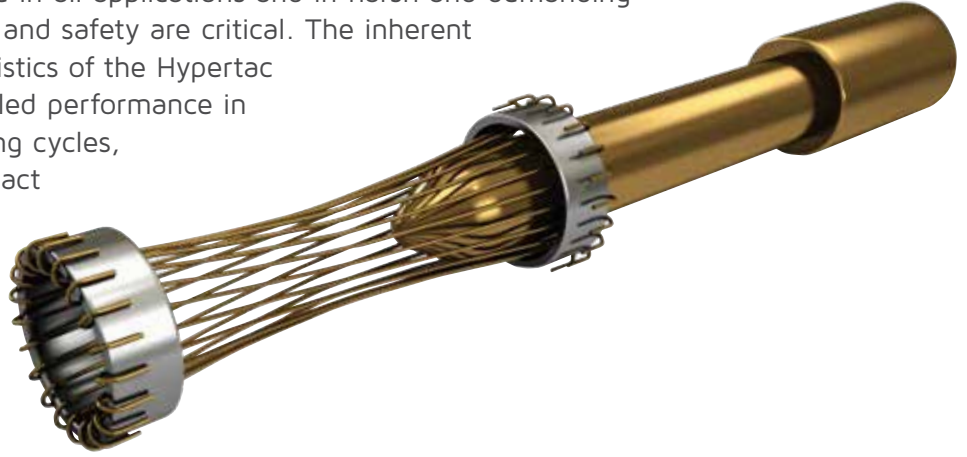

## Features

## Benefits

### Low insertion/extraction forces

The angle of the socket wires allows tight control of the pin insertion and extraction forces. The spring wires are smoothly deflected to make line contact with the pin.

### High density interconnect systems

Significant reductions in size and weight of sub-system designs. No additional hardware is required to overcome mating and un-mating forces.

### Long contact life

The smooth and light wiping action minimizes wear on the contact surfaces. Contacts perform up to 100,000 insertion/extraction cycles with minimal degradation in performance.

### Low cost of ownership

The Hypertac contact technology will surpass most product requirements, thus eliminating the burden and cost of having to replace the connector or the entire subsystem.

### Lower contact resistance

The design provides a far greater contact area and the wiping action of the wires insures a clean and polished contact surface. Our contact technology has about half the resistance of conventional contact designs.

### Low power consumption

The lower contact resistance of our technology results in a lower voltage drop across the connector reducing the power consumption and heat generation within the system.

### Higher current ratings

The design parameters of the contact (e.g., the number, diameter and angle of the wires) may be modified for any requirement. The number of wires can be increased so the contact area is distributed over a larger surface. Thus, the high current carried by each wire because of its intimate line contact, can be multiplied many times.

### Maximum contact performance

The lower contact resistance of the Hypertac contact reduces heat build-up; therefore Hypertac contacts are able to handle far greater current in smaller contact assemblies without the detrimental effects of high temperature.

### Immunity to shock & vibration

The low mass and resultant low inertia of the wires enable them to follow the most abrupt or extreme excursions of the pin without loss of contact. The contact area extends 360° around the pin and is uniform over its entire length. The 3 dimensional symmetry of the Hypertac contact design guarantees electrical continuity in all circumstances.

### Reliability under harsh environments

Harsh environmental conditions require connectors that will sustain their electrical integrity even under the most demanding conditions such as shock and vibration. The Hypertac contact provides unmatched stability in demanding environments when failure is not an option.

# Contents

Hypertac® Hyperboloid Technology.....	2
D series features & benefits.....	4
Dimensions:	
Standard plug & receptacle options.....	5
Panel mount receptacle.....	6
Cable mount receptacle.....	6
Plug.....	6
General specifications:	
Mini D00 series standard.....	7
D01 series standard.....	8
D02 series standard.....	9
D02 series (Power & Signal).....	10
D02 Series (Coax or Power & Signal).....	11
Mounting dimensions.....	12
How to order:	
Standard D series.....	13
D02 Series (Coax or Power & Signal).....	14
Product portfolio.....	15



# D Series



Smiths Interconnect's intuitive and durable D Series is recognized for its ease of use and high reliability. The D Series delivers industry-leading performance featuring simple push-button latching and a "D" shaped flange which makes mating orientation obvious.

There are three D Series sizes that accommodate a wide variety of applications. The D01 plug is available with up to nine Hypertac® hyperboloid contacts in less than 0.5" diameter, while the slightly larger D02 offers more extensive options, from three power to 25 signal contacts, or a mixture of power or coax and signal contacts. In addition, the mini D00 connector includes five signal contacts in a format nearly 30% smaller than the D01.

The D Series provides medical equipment designers with reliable connections for applications as diverse as electro-physiology catheters, patient monitors, MRIs, intravascular ultrasounds, defibrillators, infusion pumps and laboratory equipment. Polyetherimide versions are autoclavable for reusable medical device applications. D Series connectors are also used in a variety of industrial, rail and commercial applications where reliability is critical.

Cable assemblies are also offered, incorporating the D Series with overmoulding, integrated electronics, metal shells for increased strength, or alternate contact configurations to meet specific customer requirements.

For a variety of applications where reliability is critical

## Features & Benefits

### Push-button latching feature

- Quick connect – simple one-hand mating/unmating

### Available in 3 standard sizes

- Mini D00, D01 and D02
- Standard stocked connectors offered with 3 to 25 contacts

### D-shaped housings

- Visually intuitive mating

### Hybrid signal, power and coaxial contact technologies available

- Design flexibility allowing multiple contact technologies within a single connector solution

### Designed for critical medical applications

- Provides high reliability in a cost effective package
- Autoclavable: Versions with polyetherimide insulators can be autoclaved up to 20 times (pre-vacuum method, 4 minutes each @135°C)

### Fixed and in-line receptacles available

- Easy incorporation into box and extension cable designs

### Housing alignment and polarization

- Designed to prevent mismating

### Custom cable assemblies available

- Complete system solutions reduce logistic and sourcing costs


### Crimp contacts shipped unloaded

- Easier termination for reduced cost of ownership: crimp and poke termination eliminates the need to pre-tin, solder or shrink boot

# Dimensions

## Standard plug & receptacle options

For D00, D01 and D02

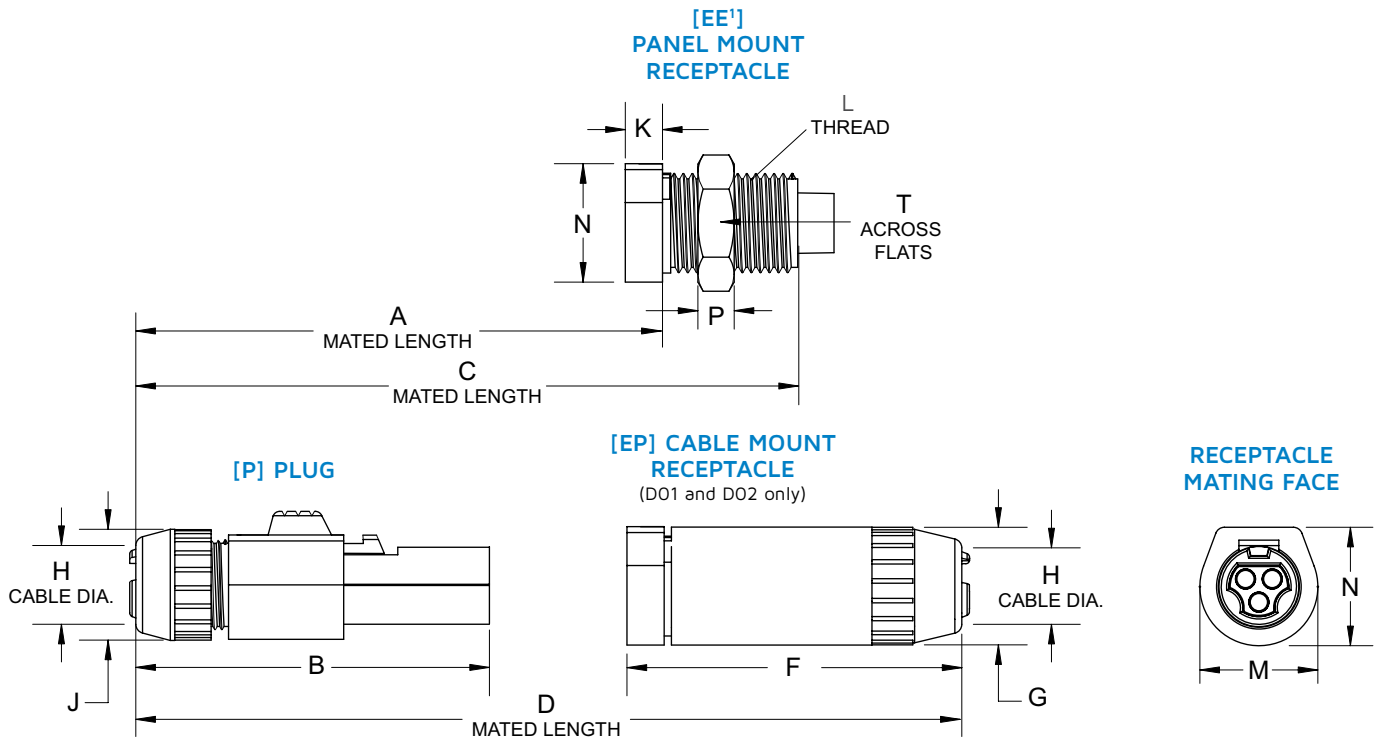


	Dimensions													
	A	B	C	D	F	G	H	J	K	L	M	N	P	T
<b>D00</b>	0.788 (20.00)	1.096 (27.83)	1.181 (30.00)	—	—	—	Ø0.089 (2.50) Min. 0.158 (4.00) Max.	Ø0.352 (8.94)	0.114 (2.88)	M8 X 1.00 Thd.	0.323 (8.20)	0.320 (8.12)	0.079 (2.00)	0.394 (10.00)
<b>D01</b>	1.142 (29.00)	1.614 (41.00)	1.732 (44.00)	2.400 (61.00)	1.500 (38.00)	Ø0.512 (13.00)	Ø0.118 (3.00) Min. 0.216 (5.50) Max.	Ø0.472 (12.00)	0.161 (4.10)	M11 X 1.00 Thd.	0.512 (13.00)	0.512 (13.00)	0.157 (4.00)	0.512 (13.00)
<b>D02</b>	1.358 (34.50)	1.950 (49.50)	2.087 (53.00)	2.953 (75.00)	1.772 (45.00)	Ø0.709 (18.00)	Ø0.197 (5.00) Min. 0.315 (8.00) Max.	Ø0.709 (18.00)	0.276 (7.00)	M15 X 1.00 Thd.	0.669 (17.00)	0.689 (17.50)	0.153 (3.89)	0.744 (18.90)

Dimensions are in inches (mm)


## [EE] Panel mount receptacle

D01 Shown

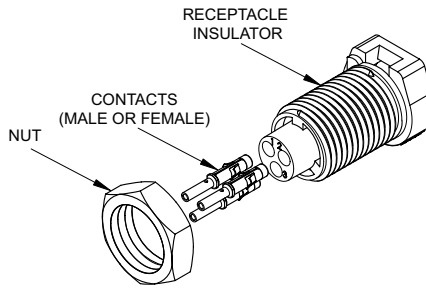


## [EP] Cable mount receptacle

D01 Shown

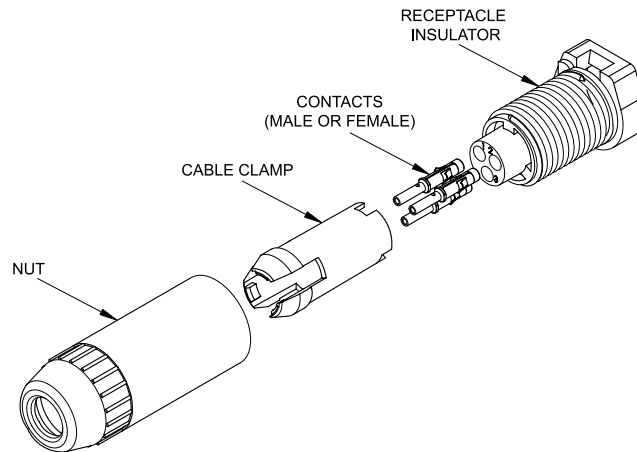

## [P] Plug

D01 Shown

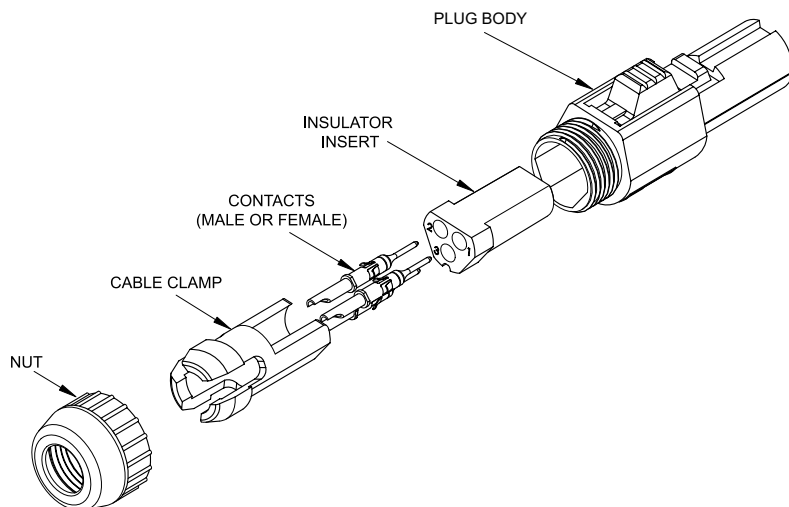


# General Specifications

(Contact arrangements & technical characteristics)

## Mini D00 series

### Standard



Receptacle seen from mating face

Number of Contacts	5
Contact Diameter	0.012 (0.30)
Termination Style	Crimp (pin & socket) 26 to 28 AWG

### Materials & Finishes

Insulator	Polyetherimide
Socket	Beryllium copper wires and brass body
Pin	Phosphor bronze
Mating Surface Plating	Gold over nickel

### Electrical

Current Rating	1.0 A
Contact Resistance	< 6.7 mΩ
Breakdown Voltage Between Contacts	1000 V min.
DWV	750 V
Insulation Resistance	> 10 <sup>3</sup> MΩ at 500 VDC

### Mechanical & Environmental

Contact Mating Cycle Life	Up to 100,000
Extraction Force	0.35 to 1.60 oz. per contact
Operating Temperature Rating	-40° to 125° C

### Accessories

Crimp Tool	AFM8 or M22520/2-01
Positioner	K1775
Insertion Tool	T2080

Dimensions are in inches (mm)

All specifications are subject to change without notice

# D01 series

## Standard



Receptacles seen from mating face

<b>Number of Contacts</b>	<b>3</b>	<b>4</b>	<b>9</b>
<b>Contact Diameter</b>	0.024 [0.60]		0.016 (0.40)

### Terminations

<b>Crimp</b> (pin & socket)	22 to 26 AWG	26 to 28 AWG
<b>Solder Cup</b> (pin & socket)	Up to 22 AWG	Up to 26 AWG

### Materials & Finishes

<b>Insulator</b>	Polycarbonate or Polyetherimide	Polyetherimide
<b>Socket</b>	Beryllium copper wires and brass body	
<b>Pin</b>	Brass or phosphor bronze	
<b>Mating Surface Plating</b>	Gold over nickel	

### Electrical

<b>Current Rating</b>	4.0 A	1.0 A
<b>Contact Resistance</b>	< 5.0 mΩ	< 8.0 mΩ
<b>Breakdown Voltage Between Contacts</b>	2250 V min.	1000 V min.
<b>DWV</b>	1650 V	750 V
<b>Insulation Resistance</b>	> 10 <sup>3</sup> MΩ at 500 VDC	

### Mechanical & Environmental

<b>Contact Mating Cycle Life</b>	Up to 100,000	
<b>Extraction Force</b>	0.50 to 2.00 oz. per contact	0.30 to 1.60 oz. per contact
<b>Operating Temperature Rating</b>	-40° to 85° C	-40° to 125° C

### Accessories

<b>Crimp Tool</b>	AFM8 or M22520/2-01	
<b>Positioner</b>	K547	T1914
<b>Extraction Tool</b>	S/DEM1.0060	—
<b>Insertion Tool</b>	T1866	T2080


Dimensions are in inches (mm)

All specifications are subject to change without notice



## D02 series

### Standard

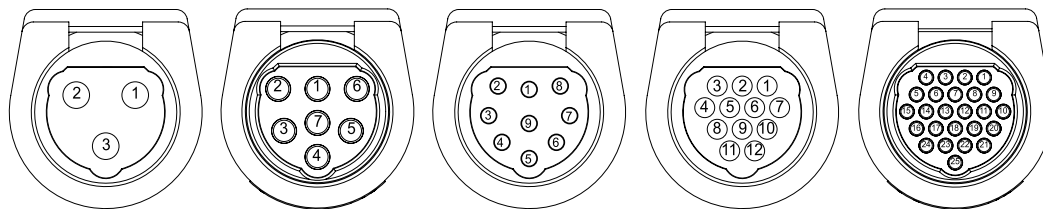

Receptacles seen from mating face

Number of Contacts	3	7	9	12	25
Contact Diameter	0.059 (1.50)	0.024 (0.60)	0.024 (0.60)	0.018 (0.50)	0.016 (0.40)

### Terminations

Crimp (pin & socket)	18 to 20 AWG	22 to 26 AWG		26 to 28 AWG
Solder Cup (pin & socket)	Up to 16 AWG	Up to 22 AWG		up to 26 AWG

### Materials & Finishes

Insulator	Polycarbonate or Polyetherimide			Polyetherimide
Socket	Beryllium copper wires and brass body			
Pin	Brass or phosphor bronze			
Mating Surface Plating	Gold over nickel			

### Electrical

Current Rating	8.0 A	4.0 A	4.0 A	2.5 A	1.0 A
Contact Resistance	< 2.0 mΩ	< 5.0 mΩ	< 5.0 mΩ	< 8.0 mΩ	< 8.0 mΩ
Breakdown Voltage Between Contacts	2250 V min.	2000 V min.	1560 V min.	1000 V min.	1000 V min.
DWV	1650 V	1500 V	1150 V	750 V	750 V
Insulation Resistance	> 10 <sup>3</sup> MΩ at 500 VDC				

### Mechanical & Environmental

Contact Mating Cycle Life	Up to 100,000				
Extraction Force (oz. per contact)	1.80 to 5.40	0.50 to 2.00	0.50 to 2.00	0.30 to 1.60	0.30 to 1.60
Operating Temperature Rating	-40° to 85° C				-40° to 125° C

### Accessories


Crimp Tool	AF8	AFM8 or M22520/2-01			
Positioner	TP688	K623	T870	T1914	
Extraction Tool	S/DEM5.0150	S/DEM1.0060		—	
Insertion Tool	T1888	T1866	T1271	T2080	

Dimensions are in inches (mm)

All specifications are subject to change without notice

## D02 series

## Power &amp; Signal



Receptacles seen from mating face

## POWER

## SIGNAL

	POWER	SIGNAL
Number of Contacts	2	7
Contact Diameter	0.059 (1.50)	0.018 (0.50)
Termination Style	Crimp (pin & socket) 16 to 20 AWG	Crimp (pin & socket) 22 to 26 AWG

## Materials &amp; Finishes

Insulator	Polycarbonate or Polyetherimide	
Socket	Beryllium copper wires and brass body	
Pin	Brass	
Mating Surface Plating	Gold over nickel	

## Electrical

Current Rating	8.0 A	2.5 A
Contact Resistance	< 2.0 mΩ	< 8.0 mΩ
Insulation Resistance	> 10 <sup>3</sup> MΩ at 500 VDC	

## Mechanical &amp; Environmental

Extraction Force	1.80 to 5.40 oz. per contact	0.30 to 1.60 oz. per contact
Operating Temperature Rating	-40° to 85° C	


## Accessories

Crimp Tool	AF8	AFM8
Positioner	T1164 (pin) TP688 (socket)	T870
Extraction Tool	T1124	—
Insertion Tool	T1888	T1215

Dimensions are in inches (mm)

## D02 series

### Coax or Power & Signal



Receptacles seen from mating face

#### POWER

#### COAX

#### SIGNAL

<b>Number of Contacts</b>	1 (either Power or Coax)		9
<b>Contact Diameter</b>	0.098 (2.50)	0.124 (3.15)	0.018 (0.50)

#### Termination Style

<b>Crimp</b> (pin & socket)	12 AWG	RG316 or RG316DB	22 to 26 AWG
<b>Solder Cup</b> (pin & socket)	—	RG405 or T-Flex 405	Up to 22 AWG

#### Materials & Finishes

<b>Insulator</b>	Polyetherimide		
<b>Socket</b>	Beryllium copper wires and brass body		
<b>Pin</b>	Brass or phosphor bronze		
<b>Mating Surface Plating</b>	Gold over nickel		

#### Electrical

<b>Current Rating</b>	25 A	—	2.5 A
<b>Contact Resistance</b>			
<b>Discrete Contacts</b>	< 1.5 max.	—	< 8.0 max.
<b>Inner Contact</b>	—	8.0 mΩ max.	—
<b>Outer Contact</b>	—	2.0 mΩ max.	—
<b>Insulation Resistance</b>	> 10 <sup>3</sup> MΩ at 500 VDC		

#### Mechanical & Environmental

<b>Extraction Force</b> (oz. per contact)	6.00 to 25.00	1.50 to 6.0 (3.00 average)	0.30 to 1.60 oz. per contact
<b>Operating Temperature Rating</b>	-40° to 125° C		

#### Accessories


<b>Crimp Tool</b>	M309	HX3 (outer) AFM8 (inner)	AFM8
<b>Crimp Die Set</b>	—	T1958 (outer) T2019 (outer for RG316DB)	—
<b>Positioner</b>	T1981	T1957 (inner)	T870
<b>Extraction Tool</b>	T1982	T1982	—
<b>Insertion Tool</b>	—	—	T1215

Dimensions are in inches (mm)

# Mounting Dimensions

## Panel cutout

For standard D00, D01 and D02 series

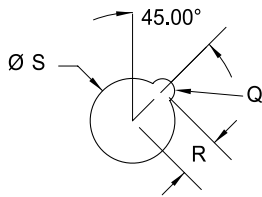


	Q	R	S
<b>D00</b>	Ø0.092 [2.34]	0.161 [4.10]	Ø0.323 [8.20]
<b>D01</b>	Ø0.126 [3.20]	0.220 [5.60]	Ø0.441 [11.20]
<b>D02</b>	Ø0.10 [2.54]	0.295 [7.50]	Ø0.598 [15.19]

Dimensions are in inches (mm)

## Panel cutout

For Power & Signal D02 series  
(2 Power + 7 Signal Version)

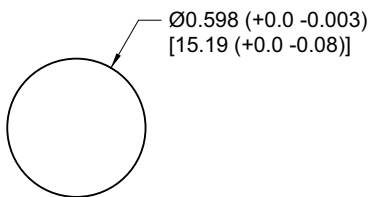

MOUNTING PLATE MATERIAL	MAX. THICKNESS
Steel	0.062 (1.60)
Other	0.094 (2.40)

**Note:**

1) Recommended tightening torque for panel mount receptacle for both D01 and D02 is (0.452 to 0.678 N•m). For D00 (0.226 to 0.339 N•m). All specifications are subject to change without notice

# How To Order



<b>1 Series</b>	<b>D 0 0</b> Series <b>D 0 1</b> Series <b>D 0 2</b> Series												
<b>2 Insulator</b>	<b>P</b> Plug <b>E E</b> Receptacle panel mount <b>E P</b> Receptacle Cable Mount <i>(Not available for 215/705 or 503 Configurations)</i>												
<b>3 Color</b> <i>(Fixed)</i>	<b>B</b> Black												
<b>4 Contact arrangement</b>	<table border="0"> <tr> <td><b>5 0 3</b> D00 5 Contacts</td> <td><b>3 0 6</b> D01 3 Contacts</td> <td><b>4 0 6</b> D01 4 Contacts</td> </tr> <tr> <td><b>9 0 4</b> D01 9 Contacts</td> <td><b>3 1 5</b> D02 3 Contacts</td> <td><b>7 0 6</b> D02 7 Contacts</td> </tr> <tr> <td><b>9 0 6</b> D02 9 Contacts</td> <td><b>1 2 5</b> D02 12 Contacts</td> <td><b>2 5 0 4</b> D02 25 Contacts</td> </tr> <tr> <td colspan="3"><b>2 1 5 / 7 0 5</b> D02 2 Power / 7 signal contacts</td> </tr> </table>	<b>5 0 3</b> D00 5 Contacts	<b>3 0 6</b> D01 3 Contacts	<b>4 0 6</b> D01 4 Contacts	<b>9 0 4</b> D01 9 Contacts	<b>3 1 5</b> D02 3 Contacts	<b>7 0 6</b> D02 7 Contacts	<b>9 0 6</b> D02 9 Contacts	<b>1 2 5</b> D02 12 Contacts	<b>2 5 0 4</b> D02 25 Contacts	<b>2 1 5 / 7 0 5</b> D02 2 Power / 7 signal contacts		
<b>5 0 3</b> D00 5 Contacts	<b>3 0 6</b> D01 3 Contacts	<b>4 0 6</b> D01 4 Contacts											
<b>9 0 4</b> D01 9 Contacts	<b>3 1 5</b> D02 3 Contacts	<b>7 0 6</b> D02 7 Contacts											
<b>9 0 6</b> D02 9 Contacts	<b>1 2 5</b> D02 12 Contacts	<b>2 5 0 4</b> D02 25 Contacts											
<b>2 1 5 / 7 0 5</b> D02 2 Power / 7 signal contacts													
<b>5 Contact gender</b>	<b>M</b> Male <b>F</b> Female												
<b>6 Termination styles<sup>(1)</sup></b>	<b>R</b> Crimp <sup>(2)</sup> <b>S</b> Solder cup												
<b>7 Material</b> <i>(Omit for polycarbonate D01 306, 406; D02 315, 706, 906, 125, 2 Power / 7 Signal only)</i>	<b>U</b> Polyetherimide												
<b>8 Plating</b>	<table border="0"> <tr> <td><b>T</b> 10 µin gold (min) over nickel <i>(male contacts only)(not available for D00)</i></td> </tr> <tr> <td><b>T H</b> 50 µin gold (min) over nickel <i>(male contacts only)</i></td> </tr> <tr> <td><b>T A H</b> 50 µin gold (min) over nickel on mating surface, gold flash over nickel on termination <i>(female contacts only)</i></td> </tr> </table>	<b>T</b> 10 µin gold (min) over nickel <i>(male contacts only)(not available for D00)</i>	<b>T H</b> 50 µin gold (min) over nickel <i>(male contacts only)</i>	<b>T A H</b> 50 µin gold (min) over nickel on mating surface, gold flash over nickel on termination <i>(female contacts only)</i>									
<b>T</b> 10 µin gold (min) over nickel <i>(male contacts only)(not available for D00)</i>													
<b>T H</b> 50 µin gold (min) over nickel <i>(male contacts only)</i>													
<b>T A H</b> 50 µin gold (min) over nickel on mating surface, gold flash over nickel on termination <i>(female contacts only)</i>													

**Notes:**  
 1) Contacts shipped unassembled  
 2) D00 available with "R" termination only (for crimp or solder)  
 3) D00 panel mount receptacle with 6" pigtail leads preterminated D00EEB-0001  
 All specifications are subject to change without notice

# How To Order

## Coax or Power & Signal only



D 0 2		B	9 0 5						U	
1	2	3	4	5	6	7	8	9	10	11


<b>1 Connector series + size</b> <i>(Fixed)</i>	D 0 2 Series
<b>2 Insulator</b>	P Plug    E E Receptacle panel mount    E P Receptacle Cable Mount
<b>3 Color</b> <i>(Fixed)</i>	B Black
<b>4 Contact arrangement</b> <i>(Fixed)</i>	9 0 5 9 signal contacts
<b>5 Signal contact gender</b>	M Male    F Female
<b>6 Signal termination styles<sup>(1)</sup></b>	R Crimp    S Solder cup
<b>7 Coaxial/power cable type</b>	1 C 1 RG 316 <i>(crimp)</i> 1 C 2 T-FLEX 405, RG 405 <i>(solder)</i> 1 C 3 RG 316DB <i>(crimp)</i> 1 P 1 12 AWG <i>(crimp)</i>
<b>8 Coax contact gender</b>	M Male    F Female
<b>9 Coax termination styles<sup>(1)</sup></b>	R Crimp    S Solder cup
<b>10 Material</b> <i>(Fixed)</i>	U Polyetherimide <i>(black)</i>
<b>11 Plating</b>	T 10 µin gold (min) over nickel <i>(male contacts only)</i> T H 50 µin gold (min) over nickel <i>(male contacts only)</i> T A H 50 µin gold (min) over nickel on mating surface, gold flash over nickel on termination <i>(female contacts only)</i>

**Note:**

1) Contacts shipped unassembled

All specifications are subject to change without notice

# Product Portfolio

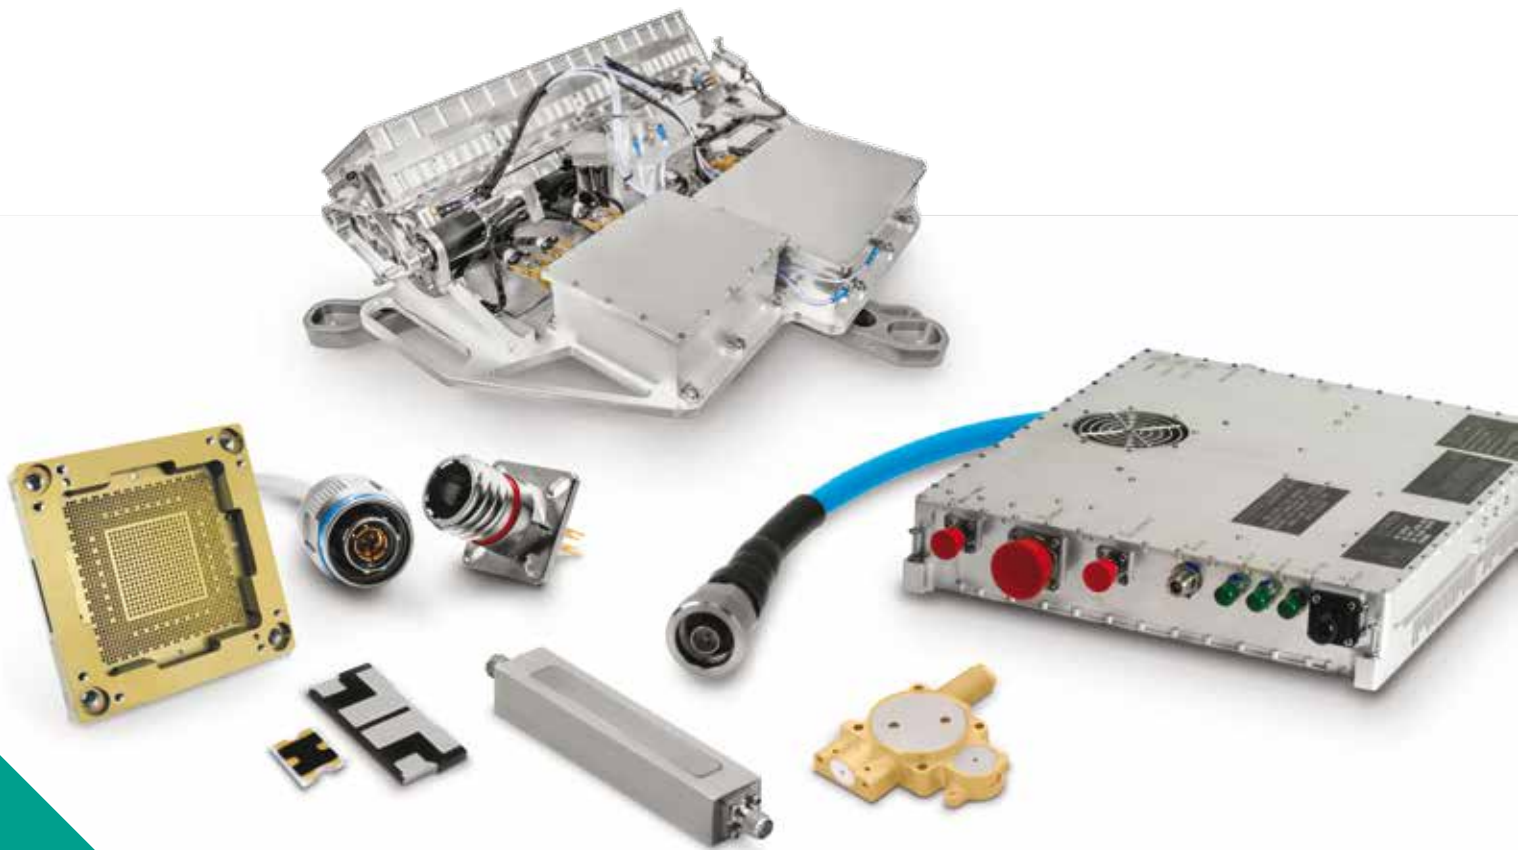

- Antenna Systems
- Cable Assemblies
- Connector Solutions
  - Ferrite Components & Assemblies
  - RF Filter Components & Assemblies
  - Integrated Microwave Assemblies
  - Millimeter-Wave Solutions
  - RF Components
  - Test Sockets and WLCSP Probe Heads
  - Time & Frequency Systems

# Global Support

## UK Headquarters

- London, UK  
+44 20 7004 1600  
info.uk@smithsinterconnect.com

## US Headquarters

- Stuart, FL  
+1 772 286 9300  
info.us@smithsinterconnect.com

## Americas

- Costa Mesa, CA  
+1 714 371 1100  
info.us@smithsinterconnect.com
- Milpitas, CA  
+1 408 957 9607 x 1125  
info.us@smithsinterconnect.com
- Stuart, FL  
+1 772 286 9300  
info.us@smithsinterconnect.com
- Hudson, MA  
+1 978 568 0451  
info.us@smithsinterconnect.com
- Northampton, MA  
+1 413 582 9620  
info.northampton@smithsinterconnectinc.com
- Tampa, FL  
+1 813 901 7200  
info.tampa@smithsinterconnectinc.com
- Kansas City, KS  
+1 913 342 5544  
info.us@smithsinterconnect.com
- Salisbury, MD  
+1 800 780 2169  
info.us@smithsinterconnect.com
- Thousand Oaks, CA  
+1 805 267 0100  
info.thousandoaks@smithsinterconnectinc.com

## Europe

- Deggendorf, Germany  
+49 991 250 120  
info.de@smithsinterconnect.com
- Genoa, Italy  
+39 0 10 60361  
info.it@smithsinterconnect.com
- Dundee, UK  
+44 1382 427 200  
info.dundee@smithsinterconnect.com
- Rouen, France  
+33 2 32 96 91 76  
info.fr@smithsinterconnect.com
- Elstree, UK  
+44 20 8236 2400  
info.uk@smithsinterconnect.com

## Asia

- Shanghai, China  
+86 21 2283 8008  
info.asia@smithsinterconnect.com
- Suzhou, China  
+86 512 6273 1188  
info.asia@smithsinterconnect.com
- Singapore  
+65 6846 1655  
info.asia@smithsinterconnect.com

more > [smithsinterconnect.com](https://www.smithsinterconnect.com) | [in](#) [twitter](#) [youtube](#)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Circular Connector](#) category:*

*Click to view products by [smiths interconnect / hypertac](#) manufacturer:*

Other Similar products are found below :

[C015](#) [10F006](#) [001](#) [1](#) [5M2530B10P](#) [600247N007](#) [600259N006](#) [600273N007](#) [600432N009](#) [6280-2PG-519](#) [6280-3PG-311](#) [6280-3SG-311](#)  
[6280-7SG-3DC](#) [6280-7SG-522](#) [6282-5PG-311](#) [6282-6PG-519](#) [6282-8SG-311](#) [6283-11](#) [6283-15](#) [6290](#) [6293](#) [6382-2PG-311](#) [6382-2PG-3DC](#)  
[6382-2SG-321](#) [6382-2SG-3DC](#) [6382-4SG-516](#) [67-03E20-37P](#) [681-PMG](#) [CXS3102A14S2P](#) [CXS3102A181S](#) [CXS3106A14S6S](#) [MB12P-1](#)  
[MB12R-6](#) [7251-2PG-300](#) [7251-2SG-300](#) [7251-4PG-300](#) [7251-4SG-300](#) [7251-5PG-300](#) [7251-5SG-300](#) [7251-6SG-300](#) [7251-7PG-300](#) [7251-](#)  
[8PG-300](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [73000005663](#) [75-190011-03P](#) [75-190216-08S](#) [75-190218-10P](#) [75-214636-52P](#) [75-474118-10P](#)  
[75-474211-03P](#) [75-474218-19S](#) [75-474618-01S](#)