


Operation: DIP+SMT/沉板卧式 3.5 中型 音频连接器(SWITCH PIN)



LTEM NO.:PJ-389 (Series)

(L14.3×W12.0×H5.0 3.5 PHONE-JACK)



沉板贴装

側向操作

精密部品


適合環保 RoHS

Technical parameter


PROJECT	LEVEL	A[better product]		B[average product]	
		Contact Rating		0.5A, 24V DC	
Electrical	Initial Contact Resistance	50mΩ max.			
	Insulation Resistance	100MΩ min.500V DC	Skey/PD: 100MΩ min.300V DC		
Properties	Withstand Voltage	500V AC for 1 minute	350 V AC for 1 minut		
	There No Load	6,000 Cycles	5,000 Cycles		
	Rated Load	5,000 Cycles	4,000 Cycles		
Durable Performance	Storage temp.	-35℃~+75℃(Operating Temp:)			
	Operating Force	IF:5~15N MAX. (EF:10.0N MIN.)			
Heat Rrsistance		IR Reflow:255℃, 5sec. Manual:350℃, 3sec.			

No	NAME	Description
①	基座	PA66 (Black)耐热塑胶
②	接触端子#1	C5191R-H (t=0.20mm)磷铜[镍基银]
③	接触端子#1	C5191R-H (t=0.20mm)磷铜[镍基银]
④	接触端子#1	C5191R-H (t=0.20mm)磷铜[镍基银]
⑤	接触端子#1	C5191R-H (t=0.20mm)磷铜[镍基银]


CIRCUIT DIAGRAM



Unit:mm

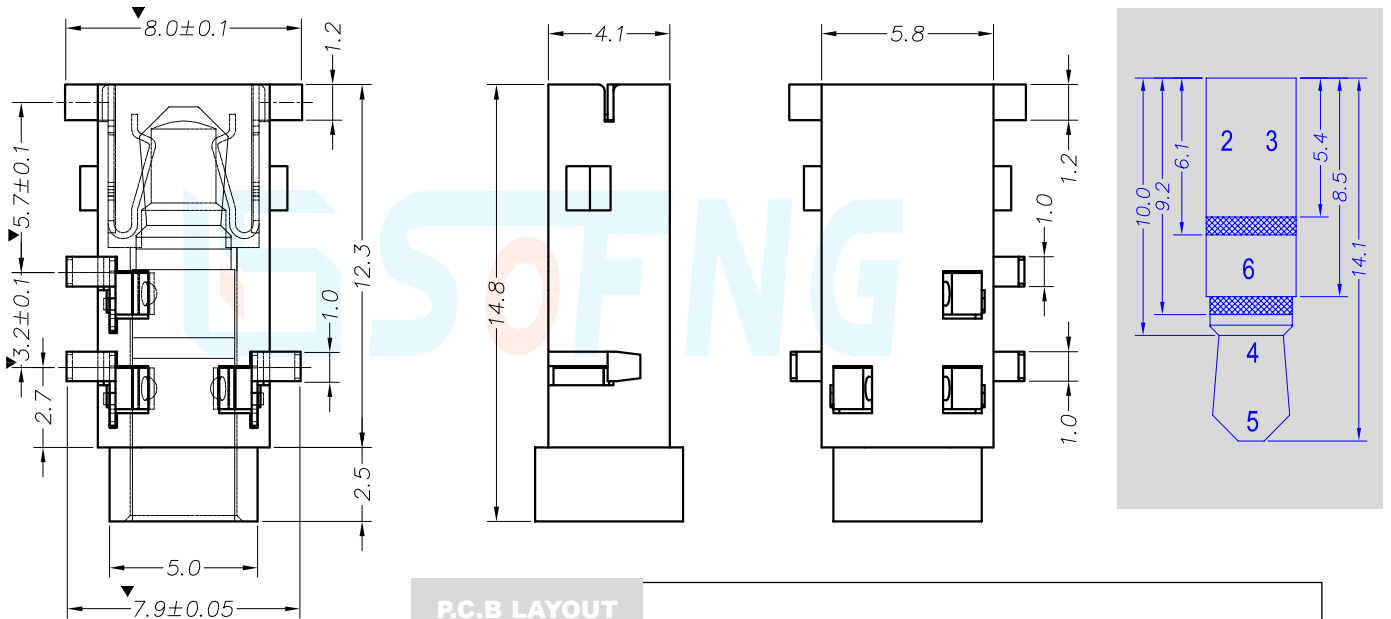

P.C.B LAYOUT

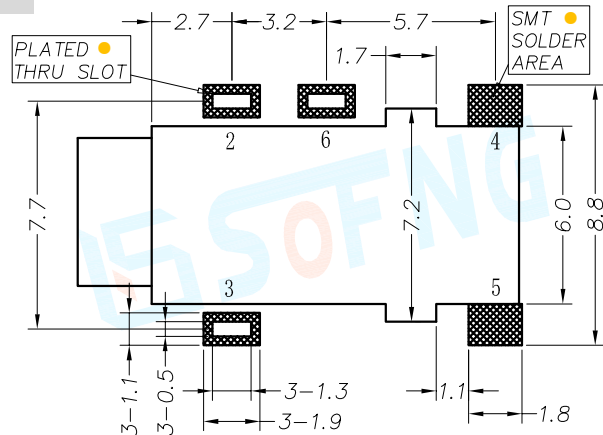

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Phone Connectors](#) category:

Click to view products by [SOFNG](#) manufacturer:

Other Similar products are found below :

[R4F](#) [14412GX](#) [E12BPKG](#) [MT333X](#) [171-3302-EX](#) [NC3MG-V](#) [NP2RX-AU-SILENT-D](#) [JM2PB-AU BULK](#) [S2674](#) [280L](#) [RJ5VI-S](#) [TM1R-AU](#) [TM2PJ-AU](#) [TM2PJ-AU BULK](#) [TS3PBJ-AU](#) [TS3PBMJ-AU](#) [MP-101](#) [54B](#) [T10711](#) [MT334F](#) [NJ3FP6F-P](#) [NPX-PROMO](#) [JS3PB-AU BULK](#) [XMT332A](#) [114BPCSX](#) [CMT334B](#) [AA0-A4830-A00](#) [PJ-218](#) [PJ-320-3P SMT](#) [PJ-321A](#) [PJ-393-8P](#) [KH-PJ-327D-SMT](#) [PJ-320D](#) [PJ-624](#) [PJ-339](#) [PJ-3200B](#) [PJ-307B-1.3-01](#) [PJ-324](#) [PJ-324M](#) [PJ-313D](#) [PJ-313](#) [PJ-227](#) [PJ-343 Red](#) [PJ-3106AC1](#) [PJ-3505A](#) [PJ-321](#) [KH-PJ-307-5P](#) [PJ-389](#) [PJ-368-R](#) [PJ-31030](#)