



»» Features

- Ultra Micro ISO Automotive relay.
- High Rating up to 20A.
- High Temperature withstand up to 125°C ambient.
- General Purpose for Automotive applications.

»» Type List

Terminal style	Contact form	Designation (provided with)	Enclosure style			
			Dust cover	Flux tight	Sealed type	Sealed type washable
Socket terminal	1A (SPNO)	-----	303-1AH-D	303-1AH-C	303-1AH-V	303-1AH-S
		Resistor ⁽¹⁾	303-1AH-D-R1	303-1AH-C-R1	303-1AH-V-R1	303-1AH-S-R1
		Diode	303-1AH-D-D1	303-1AH-C-D1	303-1AH-V-D1	303-1AH-S-D1

Note : (1) 12VDC COIL: 680 Ω Resistor in parallel

»» Ordering Information

303 - 1A H - D - R1
 1 2 3 4 5

- | | |
|---|--|
| <p>1. 303 -- Basic series designation</p> <p>2. 1A -- Single pole normally open</p> <p>3. H -- Contact material AgSnO</p> <p>4. D -- Dust cover
 C -- Flux tight
 V -- Sealed type
 S -- Sealed type washable</p> | <p>5. Blank -- Standard type</p> <p>R1 -- Coil parallel with resistor 680 Ω for coil voltage 12VDC</p> <p>D1 -- Coil parallel with diode IN4007 the positive pole "+" on # 85 terminal</p> |
|---|--|

»» Contact Rating

Inductive	4A 14VDC ; ON 3s / OFF 3s -30~+80°C 880K ops.
Motor fuel-pump	8A 14VDC Inrush 30A ; ON 1s / OFF 3s -30 ~+80°C 160K ops.
Motor radiator-fan	16A 14VDC Inrush 80A ; ON 2s / OFF 5s -30 ~+80°C 440K ops.
Lamp	16A 14VDC Inrush 80A ; ON 3s / OFF 3s -30 ~+100°C 100K ops.
Resistive	20A 14VDC +25°C 100K ops.
Max. switching current	Coil 16VDC / Contact 20A 14VDC +100°C

»» Coil Rating (DC)


Rated voltage (V)	Rated current ±10 % at 23 °C (mA)	Coil resistance ±10 % at 23 °C (Ω)	Max. continuous voltage at 85 °C	Pick up voltage(Max) at 23 °C	Drop out voltage(Min) at 23 °C	Power consumption at rated voltage
12	80	150	133 % of rated voltage	60 % of rated voltage	10 % of rated voltage	approx. 0.96W

»» Specification

Contact material	AgSnO alloy	
Contact voltage drop ⁽¹⁾	NO:200 mV Max. at 15A NC:250mV Max. at 10A	
Operate time ⁽¹⁾	10 ms MAX	
Release time ⁽¹⁾	10 ms MAX	
Insulation resistance ⁽¹⁾	20 MΩ Min. (DC 500V)	
Dielectric strength ⁽¹⁾	Between open contact	: AC 500V , 50/60Hz 1 min.
	Between contact and coil	: AC 500V , 50/60Hz 1 min.
Vibration resistance	Operating extremes	10~500Hz , 5.0G
	Damage limits	10~500Hz , 5.0G
Shock resistance	Operating extremes	10G
	Damage limits	100G
Life expectancy	Mechanical	10,000,000 operations (frequency 18,000 operations/hr)
	Electrical	100,000 operations (frequency 1,800 operations/hr)
Operating ambient temperature	-40 ~ +125 °C (no freezing)	
Weight	Approx. 20 g	

Note:(1)Initial value


»» Outline Dimensions

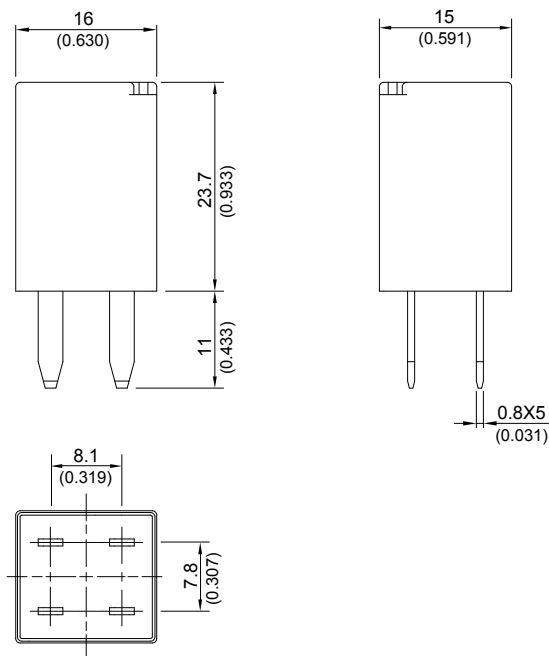


»» Wiring Diagram

BOTTOM VIEW

1A



1A (R1)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Relays](#) category:

Click to view products by [Song Chuan](#) manufacturer:

Other Similar products are found below :

[7-1414968-8](#) [7-1617345-6](#) [9-1617516-5](#) [G5CE1ASIDC12](#) [1393204-2](#) [1393302-3](#) [13Z99A115-0074](#) [1432872-1](#) [AR4-15F11-S01](#) [AR4-15H11](#)
[1617057-2](#) [1617058-6](#) [1617518-5](#) [2-1617057-2](#) [2-1617057-6](#) [2-1617058-3](#) [CB1F-M-12V-H15](#) [898H-1AH-D-001-12VDC](#) [AR4-11F11](#)
[AR4-15F11](#) [AR4-41F11](#) [24198-1](#) [4-1617057-0](#) [41FZ-200ACG-BSL](#) [5-1616920-2](#) [5-1617052-9](#) [5407-0011-HS](#) [CB1AF-M-12V-H59](#) [5-](#)
[1617346-8](#) [103-1AH-C-12VDC](#) [V23134A1052X299](#) [6-1393302-1](#) [897H-1AH-D-R1-U01-12VDC](#) [FTR-P3CP024W1-06](#) [1-1617057-8](#) [3-](#)
[1393305-1](#) [5436-0001-HS](#) [V23086-R1851-A502](#) [V23136-A0004-X075](#) [898H-1AH-D1SW-R1-12VDC](#) [RH4C1P2607](#) [RE031005](#)
[V23134M0052G242](#) [1393204-1](#) [23234B0001X001-EV-144](#) [AZ979-1A-24D](#) [2-1904020-1](#) [V23134B0052C642](#) [V23134B0053C642](#) [V23234-](#)
[A1001-X036](#)