




## SparkFun SSOP to DIP Adapter - 28-Pin

BOB-00500 ROHS ✓

★★★★★ 1

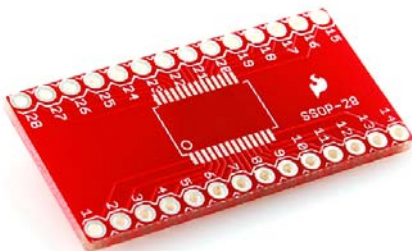

© images are CC BY-NC-SA 3.0

**Description:** 8, 16, 20, and 28-Pin SSOP to DIP break out boards. The footprint was rotated to accommodate different width SSOP devices and can be used with any pin count up to 28 pins. Designed to be used with 0.65mm pitch devices but can also be used with 0.025" pitch devices (comes out to ~0.635mm). We've made these 0.635mm devices fit just fine. Can be used with packages that have a lead span of .230" up to .350".

40 Pin break-away headers are perfect for use with these custom PCBs. Machine pin headers may be a better option for IC sockets. Pad layout fits all standard SSOP .65mm and can accommodate .635mm pitch devices.

### Dimensions:

- 8-pin: 0.6 x 0.4" (15.24 x 10.16mm) 500mil DIP spacing
- 16-pin: 1.0 x 0.4" (25.4 x 10.16mm) 400mil DIP spacing
- 20-pin: 0.8 x 1.0" (20.32 x 25.4mm) 700mil DIP spacing
- 28-pin: 1.4 x 0.7" (35.56 x 17.78mm) 600mil DIP spacing.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [SparkFun Accessories](#) category:*

*Click to view products by [SparkFun](#) manufacturer:*

Other Similar products are found below :

[DEV-17119](#) [SEN-16474](#) [COM-11450](#) [BOB-00495](#) [BOB-00497](#) [BOB-00499](#) [DEV-13598](#) [PRT-08619](#) [PRT-11363](#) [PRT-12702](#) [SEN-13582](#)  
[TOL-11468](#) [ROB-10551](#) [ROB-09065](#) [COM-12986](#) [COM-11120](#) [COM-14731](#) [COM-14646](#) [COM-11222](#) [PRT-12845](#) [CAB-13685](#) [PRT-10210](#) [PRT-14490](#) [TOL-10603](#) [PRT-08023](#) [PRT-10361](#) [PRT-10897](#) [PRT-12619](#) [BOB-10467](#) [WIG-08758](#) [KIT-13973](#) [PRT-11541](#) [PRT-14322](#) [PRT-14427](#) [PRT-13777](#) [PRT-14429](#) [COM-00540](#) [COM-13015](#) [COM-08643](#) [PRT-08430](#) [PRT-09740](#) [COM-10917](#) [TOL-10602](#) [PRT-09914](#) [TOL-12572](#) [PRT-09011](#) [COM-11020](#) [TOL-13246](#) [PRT-11710](#) [DEV-10524](#)