

### Features

- 100 mm<sup>2</sup> PIN detector
- Light blocking encapsulant
- Low dark current
- Low capacitance
- High shunt resistance
- High sensitivity

### Description

Square active area PIN photodiode with 100 mm<sup>2</sup> active area. Ceramic carrier type LCC10 package with light blocking black epoxy encapsulant. Reflow solderable. Non-hermetic.

### Application

- Ionizing radiation detector
- Medical equipment
- Personal dosimeter

### RoHS


2002/95/EC




### Absolute maximum ratings

Symbol	Parameter	Min	Max	Unit
T <sub>STG</sub>	Storage temp	-40	100	°C
T <sub>OP</sub>	Operating temp	-20	70	°C
V <sub>max</sub>	Max reverse voltage		50	V
I <sub>PEAK</sub>	Peak DC current		10	mA

### Absorption of gamma radiation (23 °C)

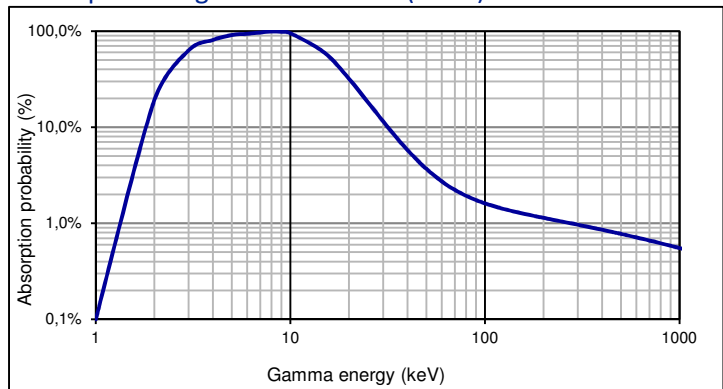

### Schematic

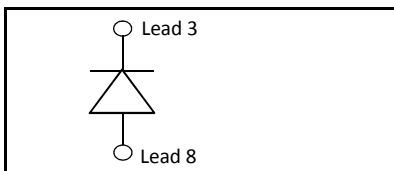

### Electro-optical characteristics @ 23 °C

Symbol	Characteristic	Test Condition	Min	Typ	Max	Unit
	Active area		10 x 10			mm
	Active area		100			mm <sup>2</sup>
	Energy range of detectable radiation	Gamma radiation	5		1000	keV
I <sub>D</sub>	Dark current	V <sub>R</sub> = 12 V		1.5	3	nA
T <sub>K</sub> (I <sub>D</sub> )	Temperature coefficient	V <sub>R</sub> = 12 V; change of dark current		13		%/K
C	Capacitance	V <sub>R</sub> = 0 V; f = 10 kHz		500		pF
		V <sub>R</sub> = 12 V; f = 10 kHz		80		pF
t <sub>R</sub>	Rise time	V <sub>R</sub> = 12 V; E = 10 keV; R <sub>L</sub> = 50 Ω			500	ns
	Shunt Resistance	V <sub>R</sub> = 10 mV		40		MΩ
	Noise current	V <sub>R</sub> = 12 V		6.1 E-14		A/√Hz
V <sub>BR</sub>	Breakdown voltage	I <sub>R</sub> = 2 μA	50	80		V

#### European, International Sales:




First Sensor AG  
 Peter-Behrens-Strasse 15  
 12459 Berlin  
 Germany  
 T +49 30 6399 2399  
 F +49 30 639923-752  
 sales.opto@first-sensor.com

#### USA:




First Sensor Inc.  
 5700 Corsa Avenue #105  
 Westlake Village  
 CA 91362 USA  
 T +1 818 706 3400  
 F +1 818 889 7053  
 sales.us@first-sensor.com

**Dark current (23 °C)**

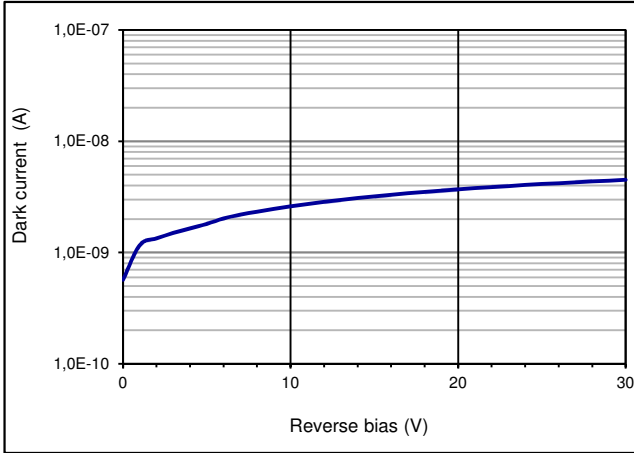

**Capacitance as fct of reverse bias (23 °C)**

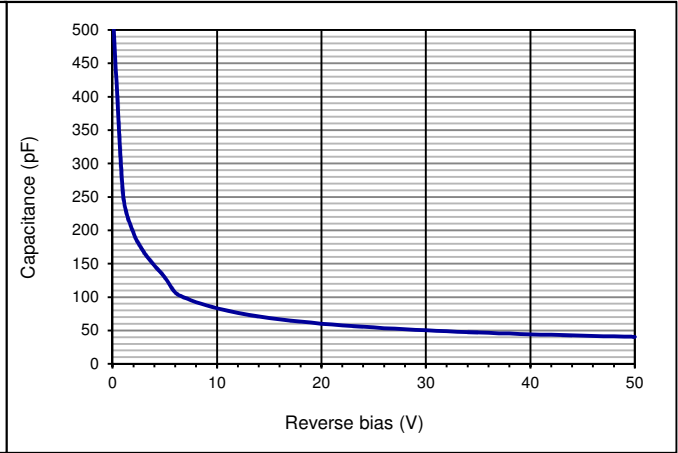

**Package dimension:**

Small quantities: Foam pad, boxed (12 cm x 16.5 cm)

**Handling:**

Please refer to document "Instructions for handling and processing"

Disclaimer: Due to our strive for continuous improvement, specifications are subject to change within our PCN policy according to JESD46C.

**European, International Sales:**



First Sensor AG  
 Peter-Behrens-Strasse 15  
 12459 Berlin  
 Germany  
 T +49 30 6399 2399  
 F +49 30 639923-752  
 sales.opto@first-sensor.com

**USA:**



First Sensor Inc.  
 5700 Corsa Avenue #105  
 Westlake Village  
 CA 91362 USA  
 T +1 818 706 3400  
 F +1 818 889 7053  
 sales.us@first-sensor.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multiple Function Sensor Development Tools](#) category:*

*Click to view products by [SparkFun](#) manufacturer:*

Other Similar products are found below :

[MAXWSNENV#](#) [STEVAL-MKIT01V1](#) [KT-O2-25%-TB200A-E](#) [KT-TVOC-200-TB200A](#) [KT-NmHc-200-TB200A](#) [SEN0344](#) [PIM520](#)  
[PIM518](#) [PIM519](#) [PIM502](#) [AS7022-EVALKIT](#) [ALTEHTG2SMIP](#) [MAX30101WING#](#) [OB1203SD-U-EVK](#) [MIKROE-4265](#) [A000070](#)  
[EV\\_ICG-20660L](#) [GX-F12A-P](#) [GX-F15A](#) [GX-F8AI-P](#) [GX-H15AI-P](#) [GX-H6A-P](#) [GX-HL15B-P](#) [1093](#) [MIKROE-2455](#) [MIKROE-2458](#)  
[MIKROE-2507](#) [MIKROE-2508](#) [MIKROE-2516](#) [MIKROE-2529](#) [1458](#) [MIKROE-1628](#) [176](#) [189](#) [1893](#) [2106](#) [ATQT4-XPRO](#) [GP30-DEMO](#)  
[MODULE](#) [GX-F12AI-P](#) [GX-F15A-P](#) [GX-FL15B-P](#) [GX-H12AI-P](#) [GX-H15A-P](#) [GX-H6AI-P](#) [GX-H8A-P](#) [GX-F15AI-P](#) [GX-FL15A-P](#) [AAS-](#)  
[AQS-UNO](#) [DFR0018](#) [DFR0131](#)