

DESCRIPTION



- Low Collector Saturation Voltage
: $V_{CE(sat)} = -0.5(V)(Max) @ I_C = -5A$
- Good Linearity of h_{FE}

APPLICATIONS

- Designed for chopper regulator, switch and general purpose applications

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-70	V
V_{CEO}	Collector-Emitter Voltage	-50	V
V_{EBO}	Emitter-Base Voltage	-6	V
I_C	Collector Current-Continuous	-12	A
I_{CM}	Collector Current-Peak	-20	A
I_B	Base Current-Continuous	-4	A
P_C	Collector Power Dissipation @ $T_c = 25^\circ C$	60	W
T_J	Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-55~150	$^\circ C$

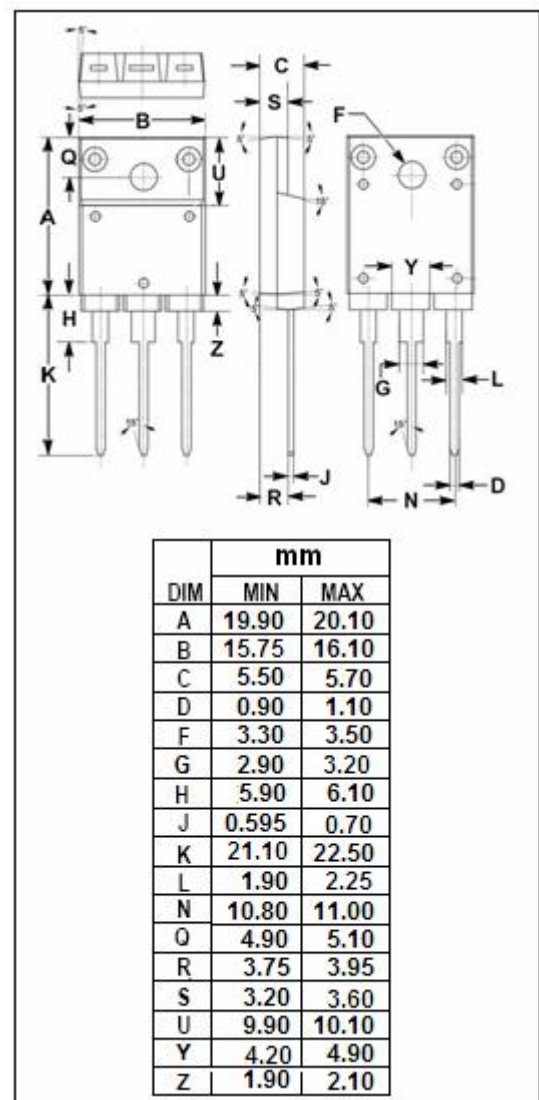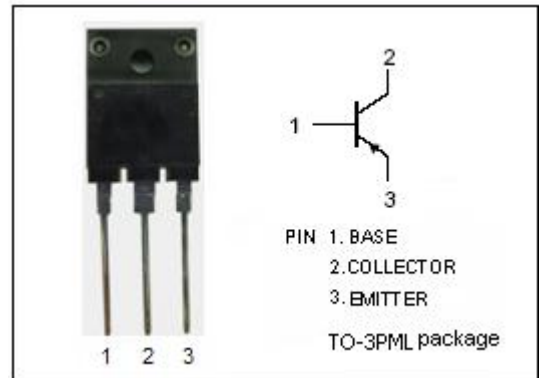

ELECTRICAL CHARACTERISTICS

T_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = -25mA ; I _B = 0	-50			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = -5A; I _B = -80mA			-0.5	V
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C = -5A; I _B = -80mA			-1.2	V
I _{CBO}	Collector Cutoff Current	V _{CB} = -70V ; I _E = 0			-10	μ A
I _{EBO}	Emitter Cutoff Current	V _{EB} = -6V; I _C = 0			-10	μ A
h _{FE}	DC Current Gain	I _C = -5A ; V _{CE} = -1V	50			
C _{OB}	Output Capacitance	I _E = 0 ; V _{CB} = -10V;f= 1.0MHz		400		pF
f _T	Current-Gain—Bandwidth Product	I _E = 1A ; V _{CE} = -12V		25		MHz

Switching Times

t _{on}	Turn-on Time	I _C = -5A , R _L = 4 Ω , I _{B1} = -I _{B2} = -80mA, V _{CC} = -20V		0.5		μ s
t _{stg}	Storage Time			0.6		μ s
t _f	Fall Time			0.3		μ s

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [SPTECH manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)