


REV.	REVISION NO.	DATE	BY	APP.
1	00-2147	09/11/00	GJR	5897
2	00-2183	09/29/00	GJR	5897
3	01-2417	05/21/01	GJR	5929
4	01-2539	07/19/01	GJR	5929
5	04-4057	5/18/04	GJR	5929
6	04-4103	6/22/04	GJR	5929
7	04-4436	12/28/04	GJR	5929
8	05-4483	2/9/05	GJR	5929
9	05-4621	5/3/05	GJR	5929
10	05-5083	3/20/06	GJR	5929
11	07-5465	11/30/07	KMS	



CONDUCTOR PART NUMBER	① 3 CONDUCTOR BULK	FINAL LENGTH ±.06 IN	CABLE LENGTH ±.05 IN
P-2431.3	14224.1	6.0 IN	6.75 IN
P-2432.3	14224.1	152.4 mm	171.5 mm
P-2433.3	14224.1	12.0 IN	12.75 IN
P-2434.3	14224.1	304.8 mm	323.8 mm
P-2435.3	14224.1	18.0 IN	18.75 IN
P-2436.3	14224.1	457.2 mm	476.2 mm
P-2437.3	14224.1	24.0 IN	24.75 IN
P-2438.3	14224.1	609.6 mm	628.6 mm
P-2439.3	14224.1	36.0 IN	36.75 IN
P-2440.3	14224.1	91.4 mm	93.5 mm
P-2441.3	14224.1	8.0 IN	8.75 IN
P-2442.3	14224.1	203.2 mm	222.2 mm
P-2443.3	14224.1	72.0 IN	72.75 IN
P-2444.3	14224.1	1628.8 mm	1847.8 mm
P-2445.3	14224.1	80.0 IN	80.75 IN
P-2446.3	14224.1	2032.0 mm	2051.0 mm
P-2447.3	14224.1	9.0 IN	9.75 IN
P-2448.3	14224.1	229.6 mm	247.7 mm
P-2449.3	14224.1	48.0 IN	48.75 IN
P-2450.3	14224.1	1219.2 mm	1238.2 mm
P-2451.3	14224.1	120.0 IN	120.75 IN
P-2452.3	14224.1	3048.0 mm	3067.0 mm
P-2453.3	14224.1	180.0 IN	180.75 IN
P-2454.3	14224.1	4572.0 mm	4591.0 mm

THIS DRAWING REPRESENTS CONFIDENTIAL AND PROPRIETARY INFORMATION OF SST TECHNOLOGIES INC. ANY REPRODUCTION, ALTERATION OR DISCLOSURE IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN APPROVAL OF SST TECHNOLOGIES INC. ANY USE OF THIS DRAWING SHALL BE SUBJECT TO SST TECHNOLOGIES INC. SUPPLIER QUALITY ASSURANCE SPECIFICATION SYSTEM.

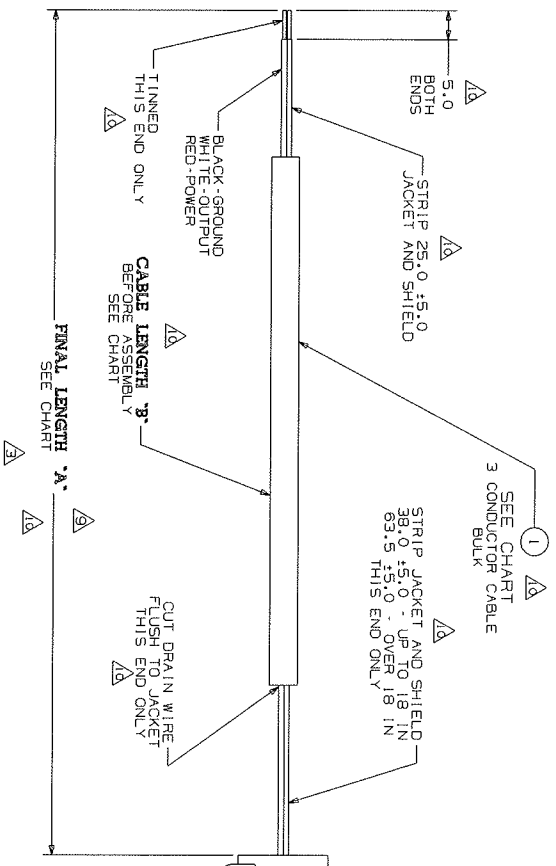

SST Technologies, Inc.

A	B	C	D	E	F	G	H	J	K	L	M	
N	P	O	R	I	S	T	U	V	W	X	Y	Z

398	UNIFORM	398	DO NOT SCALE	398	DO NOT SCALE PRINT
NAME	CABLE/CONNECTOR S/A	398	398	398	398
SIZE	N/A	398	398	398	398
QUANTITY	1 OF 1	398	398	398	398
DATE	N/A	398	398	398	398
REV.	NX	398	398	398	398
DESCRIPTION	COMPUTER DRAWING	398	398	398	398
SCALE	AS SHOWN	398	398	398	398
PROJECT	P-2418.3	398	398	398	398
DRAWN BY		398	398	398	398
CHECKED BY		398	398	398	398
DATE		398	398	398	398

MILLIMETERS
TOLERANCE ± .00
Ø ± .02 ± .13
LENGTH ± .02 ± .13
ANGLE ± 1°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ssi technologies](#) manufacturer:

Other Similar products are found below :

[P51-5-G-UC-I36-4.5V-000-000](#) [P51-200-G-B-M12-20MA-000-000](#) [P51-50-A-A-MD-20MA-000-000](#) [P51-75-G-A-I36-20MA-000-000](#) [P51-3-G-UB-I36-4.5V-000-000](#) [P51-3-G-UC-I36-4.5V-000-000](#) [P51-15-G-UC-I36-4.5V-000-000](#) [P51-500-A-A-I36-20MA-000-000](#) [P51-100-S-A-I36-4.5V-000-000](#) [P51-100-G-M-P-4.5V-000-000](#) [P51-500-S-A-I36-20MA-000-000](#) [P51-300-S-A-I12-4.5V-000-000](#) [P51-200-G-B-I36-20MA-000-000](#) [P51-50-G-A-I36-4.5V-000-000](#) [P51-3000-A-A-I12-20MA-000-000](#) [P51-10-G-UC-I36-5V-000-000](#) [P51-50-A-B-M12-4.5V-000-000](#) [P51-50-G-B-M12-20MA-000-000](#) [P51-50-A-A-I36-5V-000-000](#) [MG-5000-A-MD-R](#) [P51-50-A-A-P-20MA-000-000](#) [P51-50-G-B-I36-20MA-000-000](#) [P51-100-G-G-P-4.5V-000-000](#) [P51-3-G-UC-I36-5V-000-000](#) [P51-50-A-A-I36-4.5OVP-000-000](#) [P51-1000-A-A-I36-20MA-000-000](#) [P51-1000-S-B-I36-20MA-000-000](#) [P51-5-G-UB-I36-4.5V-000-000](#) [P51-500-A-A-I36-5V-000-000](#) [P51-50-A-B-I36-4.5V-000-000](#) [P51-50-G-A-I36-20MA-000-000](#) [P51-50-G-B-I36-5V-000-000](#) [P51-50-A-B-I36-4.5OVP-000-000](#) [P51-1000-S-B-I36-5V-000-000](#) [P51-15-G-UB-I36-5V-000-000](#) [P51-15-G-UB-I36-20MA-000-000](#) [P51-50-A-B-I36-5V-000-000](#) [P51-300-G-B-I36-4.5V-000-000](#) [P51-3-G-UB-I36-20MA-000-000](#) [P51-5-G-UC-I36-20MA-000-000](#) [DFT-110](#) [P51-100-A-B-I36-4.5V-000-000](#) [P51-500-A-B-I36-4.5OVP-000-000](#) [MG1-5-A-9V-R](#) [MG-50-A-9V-R](#) [MG1-100-A-9V-R](#) [P51-100-A-B-I36-5V-000-000](#) [P51-300-G-A-I36-20MA-000-000](#) [P51-100-G-B-M12-20MA-000-000](#) [P51-50-A-B-I36-20MA-000-000](#)