

承 认 书

SPECIFICATIONS FOR APPROVAL

客户名称:
Customer: _____

产品名称: 石英晶体谐振器
Description: _____
CRYSTAL RESONATOR

产品型号: 5032 25M 20PF 20PPM 2P
SPECIES _____

标称频率: 25.000MHz
FREQUENC _____

料 号:
MATERIAL CODE _____
SST-5032/25.000M20PF20PPM2P




| 供应商确认 | | | | 客户确认 | | | |
|----------------|-------------------------|----------------------|------------------------------------------------|----------------|-------------------------|-------------------------|-------------------------------------|
| 品管部 QC Dept | 工程部 Engineer Dept | 业务部 Trade Dept | <input checked="" type="checkbox"/> 合格 PASS | 品管部 QC Dept | 工程部 Engineer Dept | 采购部 Purchase Dept | <input type="checkbox"/> 合格 PASS |
| 莫平会 | 梁雄 | 陈晓群 | <input type="checkbox"/> 不合格 NG | | | | <input type="checkbox"/> 不合格 NG |

公司地址: 四川省泸州市泸县工业园 B 区明星路 204 号 (坤羽) 五、六栋
电话: 0830-8172777、0830-8106299 传真: 0830-8106266



GENERAL SPECIFICATIONS (电气特性) :

| No. | Parameters | Symb. | Electrical Specification | | | | Notes |
|-----|-----------------------------|------------------|--------------------------|------|------|-------|------------------------------------------|
| | | | Min. | Typ. | Max. | Units | |
| 1 | Nominal Frequency | F0 | 25.000000 | | | MHz | |
| 2 | Overtone order | | Fundamental | | | | |
| 3 | Frequency Tolerance | $\Delta F/F0$ | -20 | - | +20 | ppm | at 25°C±3°C |
| 4 | Operating Temperature Range | T _{OPR} | -40 | - | +85 | °C | |
| 5 | Frequency Stability | TC | -30 | - | +30 | ppm | The reference temperature shall be +25°C |
| 6 | Storage Temperature | T _{STG} | -55 | - | +150 | °C | |
| 7 | Load capacitance | CL | - | 20 | - | pF | |
| 8 | Equivalent resistance | ESR | - | - | 40 | Ω | |
| 9 | Level of drive | DL | - | 100 | 300 | μW | |
| 10 | Insulation Resistance | | 500 | - | - | MΩ | DC100V ±15V. |
| 11 | Shunt Capacitance | C0 | - | - | 7 | pF | |
| 12 | Aging Per Year | Fa | -3 | - | +3 | ppm | First Year |
| 13 | Package type | | 5032 seam 2PAD | | | | |

DIMENSIONS SPECIFICATIONS (外形尺寸)

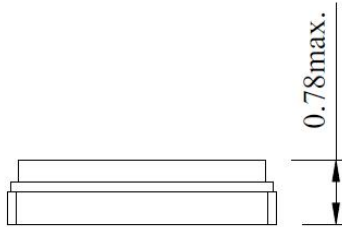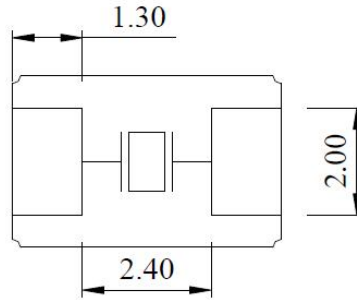

Recommended Solder Pattern

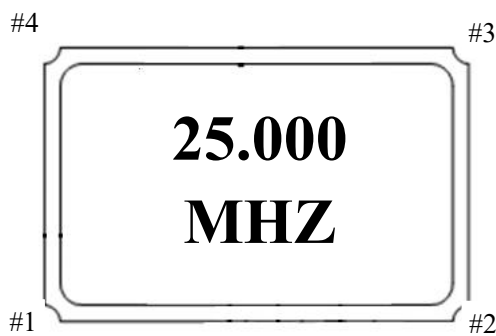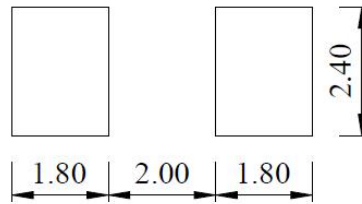

Tape Dimensions(unit : mm)



| A | B | C | D | E | F |
|------|-----|-----|-----|------|-----|
| 1.50 | 4.0 | 8.0 | 5.5 | 12.0 | 1.5 |

Reel Dimensions(unit: mm)



| G | H | I | J | K | L | M |
|-----|------|------|------|-----|------|-----|
| 2.5 | 13.5 | 21.6 | 60.0 | 178 | 13.5 | 1.6 |

*1000pcs/Reel

| No. | Test Item | Test Conditions | Spec Code |
|-----|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| 1 | High Temperature Storage | Temperature: 125°C ± 5°C Time: 1000 ± 12 Hours | A |
| 2 | Temperature Cycle | Temperature 1: -55°C ± 5°C Temperature 2: 125°C ± 5°C Temperature change between T1 and T2 at soonest Run 1000 cycles, maintain T1 and T2 30 minutes each in one cycle | A |
| 3 | High Temperature, High Humidity Storage | Temperature: 85°C ± 5°C Relative Humidity: 80%--85% Time: 250Hours ± 24 Hours | A |
| 4 | Steam Aging | Temperature: 97°C ± 5°C; Time: 24 Hours 260°C solder pot to check solderability | A |
| 5 | Solderability | Pre-heat temperature: +150 ± 10°C Pre-heat time: 60~120s When the temperature of the specimen is reached at +215 ± 3°C, it shall be left for 30 ± 1sec. Peak temperature 240 ± 5°C Material: Pb-free (Sn-3.0Ag-0.5Cu) Flux: Rosin resin methyl alcohol solvent (1: 4) | B |
| 6 | Aging | Temperature: 85°C ± 5°C; Time: 250 ± 12Hours | A |
| 7 | Drop Test | Preparation: Test pieces should be fixed on the dummy load with 200g weight. Condition: Height 1.5m onto concrete Drop times :10 times in 6 mutually perpendicular axes | A |
| 8 | Vibration | Frequency Range: 10Hz~2000Hz Amplitude: 1.5mm or 20G 4Hours in each direction, total 12Hours | A |
| 9 | Reflow resistance | Pre-heat temperature : +150~180°C Pre-heat time: 90±30s Heat temperature : more than +230°C Heat time: 30s ±10s Peak temperature : +260±5°C Peak time: less than 10s | A |

| Specification code | Specification |
|--------------------|-------------------------------------------------------------------------------------------------|
| A | $\Delta f/f \leq \pm 3$ ppm $\Delta CI/CI \leq \pm 15\%$ or 5 Ω make use larger value |
| B | The electrodes should be covered by a new solder at least 90% of immersed area. |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [SST](#) manufacturer:

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [CX2520DB16000H0HPQCC](#) [MMCC2R32.7680KHZ](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#) [FP0800018](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#)