


- Features:
- R Value extension of RMCF product
 - Highly stable performance over time
 - Power derating from 100% at 70°C to zero at 125°C
 - E12 and E24 values
 - Nickel barrier terminations
 - RoHS compliant



Electrical Specifications							
Type / Code	Power Rating (Watts) @ 70°C	Maximum Working Voltage ⁽¹⁾	Maximum Overload Voltage	Resistance Temperature Coefficient	Ohmic Range (Ω) and Tolerance		
					1%	5%	10%
HMC0402	0.063W	50V	100V	±200 ppm/°C ±400 ppm/°C	11M - 20M	-	
					22M - 100M		
HMC0603	0.1W	50V	100V	±200 ppm/°C	11M - 20M	-	
				±400 ppm/°C	22M - 100M	30M - 100M	
				±500 ppm/°C	-	110M - 1G	110M - 4.7G
HMC0805	0.125W	150V	300V	±200 ppm/°C	11M - 20M	-	
				±400 ppm/°C	22M - 100M	30M - 100M	33M - 100M
				±500 ppm/°C	-	110M - 500M	
				±1000 ppm/°C	-	510M - 1G	
HMC1206	0.25W	200V	400V	±200 ppm/°C	11M - 20M	-	
				±400 ppm/°C	22M - 100M	30M - 100M	
				±500 ppm/°C	-	110M - 500M	
				±1000 ppm/°C	-	510M - 1G	
HMC1210	0.33W	200V	400V	±200 ppm/°C	11M - 20M	-	11M - 20M
				±400 ppm/°C	22M - 100M		
HMC2010	0.75W	200V	400V	±200 ppm/°C	11M - 20M		
				±400 ppm/°C	22M - 100M		
HMC2512	1W	250V	500V	±200 ppm/°C	11M - 20M		
				±400 ppm/°C	22M - 100M		

(1) Lesser of \sqrt{PR} or maximum working voltage.

Mechanical Specifications						
Type / Code	L Body Length	W Body Width	H Body Height	a Top Termination	b Bottom Termination	Unit
HMC0402	0.039 ± 0.002	0.020 ± 0.002	0.014 ± 0.002	0.008 ± 0.004	0.008 ± 0.004	inches mm
	1.00 ± 0.05	0.50 ± 0.05	0.35 ± 0.05	0.20 ± 0.10	0.20 ± 0.10	
HMC0603	0.063 ± 0.004	0.031 ± 0.004	0.018 ± 0.004	0.012 ± 0.008	0.012 ± 0.008	inches mm
	1.60 ± 0.10	0.80 ± 0.10	0.45 ± 0.10	0.30 ± 0.20	0.30 ± 0.20	
HMC0805	0.079 ± 0.008	0.049 ± 0.004	0.020 ± 0.004	0.016 ± 0.008	0.016 ± 0.008	inches mm
	2.00 ± 0.20	1.25 ± 0.10	0.50 ± 0.10	0.40 ± 0.20	0.40 ± 0.20	
HMC1206	0.122 ± 0.006	0.061 ± 0.004	0.022 ± 0.006	0.020 ± 0.010	0.020 ± 0.008	inches mm
	3.10 ± 0.15	1.55 ± 0.10	0.55 ± 0.15	0.50 ± 0.25	0.50 ± 0.20	
HMC1210	0.126 ± 0.008	0.102 ± 0.006	0.022 ± 0.004	0.020 ± 0.008	0.020 ± 0.008	inches mm
	3.20 ± 0.20	2.60 ± 0.15	0.55 ± 0.10	0.50 ± 0.20	0.50 ± 0.20	
HMC2010	0.197 ± 0.008	0.098 ± 0.006	0.022 ± 0.004	0.024 ± 0.010	0.020 ± 0.008	inches mm
	5.00 ± 0.20	2.50 ± 0.15	0.55 ± 0.10	0.60 ± 0.25	0.50 ± 0.20	
HMC2512	0.250 ± 0.008	0.126 ± 0.006	0.022 ± 0.004	0.024 ± 0.010	0.020 ± 0.008	inches mm
	6.35 ± 0.20	3.20 ± 0.15	0.55 ± 0.10	0.60 ± 0.25	0.50 ± 0.20	


HMC Series

High Value Thick Film Chip Resistor

Performance Characteristics		
Test	Test Conditions (JIS C 5202)	Test Results
Long Term Stability	Nominal temperature & humidity for 1,000 hrs.	± 0.5%
High Temperature Loading	15VDC, 1.5 hr. ON, 0.5 hr. OFF, 1,000 hrs. 70°C	± 3%
Resistance to Solder Heat	260°C ± 5°C, 10 seconds +1/-0	± 1%
Short Time Overload	5 seconds at maximum overload voltage	± 2%
Voltage Coefficient of Resistance	Per JIS C 5202	± 0.5%/V

Operating Temperature Range: -55°C to +125°C

Power Derating Curve:

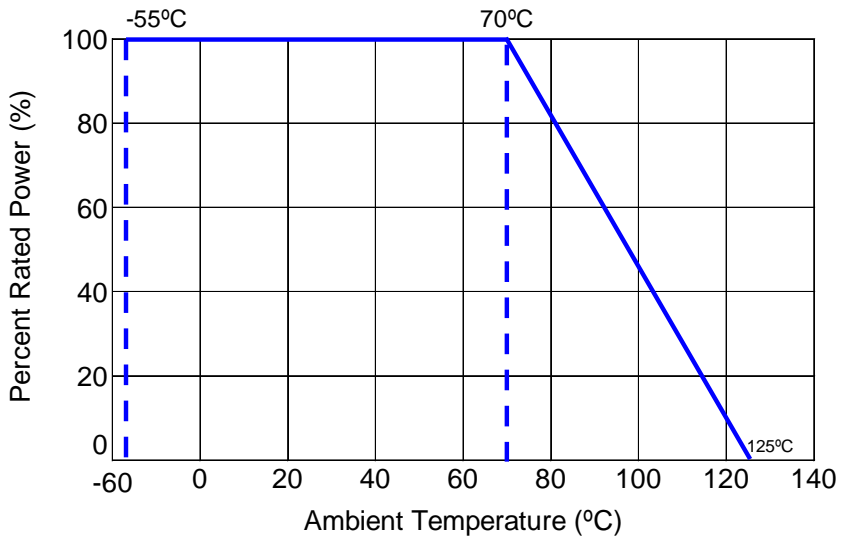

How to Order

1	2	3	4	5	6	7	8	9	10	11	12	13
H	M	C	0	8	0	5	F	T	4	7	M	0

Product Series		Size	Power	Tolerance			Packaging				Resistance Value
HMC	High Value Thick Film	0402	0.063W	Code	Tol	Value	T	7" Reel Paper Tape	0402	10,000	Four characters with the multiplier used as the decimal holder. 30 Mohm = 30M0 100 Mohm = 100M 1.2 Gohm = 1G20
		0603	0.1W	F	1%				0603, 0805 1206, 1210	5,000	
		0805	0.125W	J	5%						
		1206	0.25W	K	10%	7" Reel Plastic Tape		2010	4,000		
		1210	0.33W				2512				
		2010	0.75W								
				2512	1W						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD category:](#)

Click to view products by [Stackpole manufacturer:](#)

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [CR-12FP4--324R](#) [CR-12JP4--680R](#) [M55342K06B10D0RS6](#) [M55342K06B14E0RS6](#)
[M55342K06B1E78RS3](#) [M55342K06B24E9RS6](#) [M55342K06B6E19RWL](#) [M55342K06B6E81RS3](#) [M55342M05B200DRWB](#)
[M55342M06B4K70MS3](#) [MC0603-511-JTW](#) [742C083750JTR](#) [MCR01MZPF1202](#) [MCR01MZPF1601](#) [MCR01MZPF1800](#)
[MCR01MZPF6201](#) [MCR01MZPF9102](#) [MCR01MZPJ113](#) [MCR01MZPJ121](#) [MCR01MZPJ125](#) [MCR01MZPJ751](#) [MCR03EZHZ103](#)
[MCR03EZPF2004](#) [MCR03EZPJ270](#) [MCR03EZPJ821](#) [MCR10EZPF1102](#) [MCR10EZPF2700](#) [MCR18EZPJ330](#) [RC0603F1473CS](#)
[RC0603F150CS](#) [RC1005F1152CS](#) [RC1005F1182CS](#) [RC1005F1372CS](#) [RC1005F183CS](#) [RC1005F1911CS](#) [RC1005F1912CS](#)
[RC1005F203CS](#) [RC1005F2052CS](#) [RC1005F241CS](#) [RC1005F2431CS](#) [RC1005F3011CS](#) [RC1005F303CS](#) [RC1005F4321CS](#)
[RC1005F4642CS](#) [RC1005F471CS](#) [RC1005F4751CS](#) [RC1005F5621CS](#) [RC1005F6041CS](#)