


Radial Lead Taping Specification – Pana-Sert


Carbon Film & Metal Film Resistors (1/4 W Body Size)

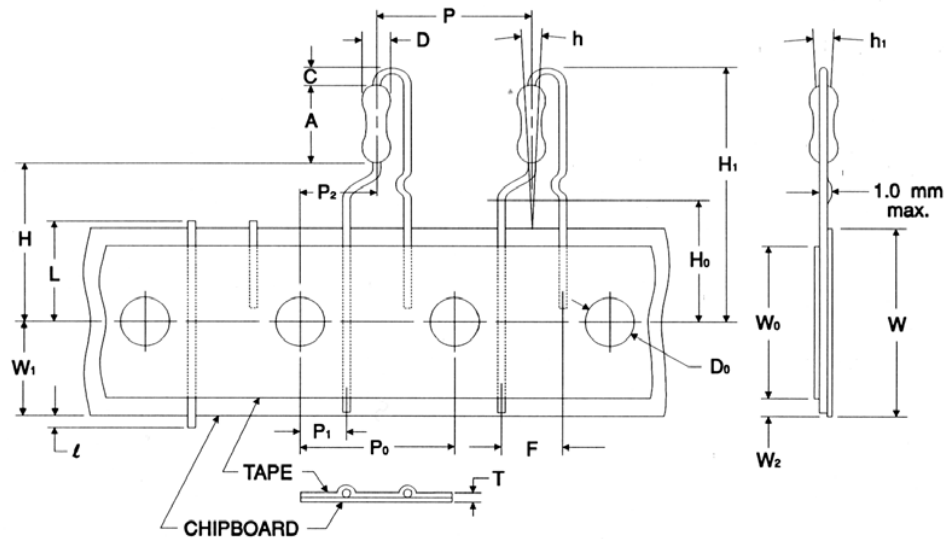

Symbol	Description	PANA-SERT	Unit	Symbol	Description	PANA-SERT	Unit
A	Resistor body length	0.256 ± 0.020 6.50 ± 0.50	inches mm	L	Cutout Length (1)	0.433 max. 11.00 max.	inches mm
C	Height of bending	0.098 ± 0.020 2.50 ± 0.50	inches mm	P	Resistor pitch (1)	0.500 ± 0.039 12.70 ± 1.00	inches mm
D	Resistor body diameter	0.091 ± 0.008 2.30 ± 0.20	inches mm	P ₀	Sprocket-hole pitch (1)	0.500 ± 0.012 12.70 ± 0.30	inches mm
D ₀	Sprocket-hole diameter	0.157 ± 0.012 4.00 ± 0.30	inches mm	P ₁	Sprocket-hole center to lead center	0.152 ± 0.028 3.85 ± 0.70	inches mm
F	Resistor lead spacing	0.197 ± 0.039 5.00 ± 1.00	inches mm	P ₂	Sprocket-hole center to resistor center (1)	0.250 ± 0.051 6.35 ± 1.30	inches mm
H	Height to bottom of resistor	0.748 ± 0.039 19.00 ± 1.00	inches mm	T	Thickness (chipboard and tape)	0.028 ± 0.008 0.70 ± 0.20	inches mm
H ₀	Height to lead clinch	0.630 ± 0.020 16.00 ± 0.50	inches mm	W	Chipboard width (1)	0.709 ± 0.039 18.00 ± 1.00	inches mm
H ₁	Height of resistor	1.122 max. 28.50 max.	inches mm	W ₀	Hold-down tape width	0.49 min. 12.50 min.	inches mm
h	Resistor alignment	0 ± 0.079 (0 ± 5°) 0 ± 2.00 (0 ± 5°)	inches mm	W ₁	Sprocket-hole position	0.354 ± 0.030 9.00 ± 0.75	inches mm
h ₁	Resistor alignment	0 ± 0.079 (0 ± 5°) 0 ± 2.00 (0 ± 5°)	inches mm	W ₂	Hold-down tape position	0.118 max. 3.00 max.	inches mm
l	Lead protrusion	0.079 max. 2.00 max.	inches mm				

Axial Leaded Resistor Packaging & Identification Variations

Lead-Tape Specifications: Reeled in accordance with EIA-296-F

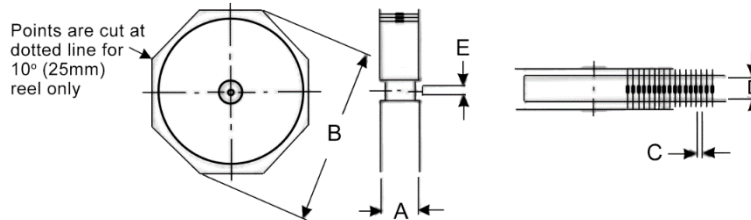

Series	Code	A max ⁽¹⁾	B max	C	D ⁽²⁾	Tape	Unit
ASR	1	3.917	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches
		99.50	343.00	10.00 ± 0.50	52.40 ± 2.00	6.350	mm
ASRM	14	2.508	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		63.70	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	12	2.618	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		66.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
CD	18	2.508	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		63.70	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	14	2.618	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		66.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	12	2.736	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		69.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
CF	18	2.508	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		63.70	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	14	2.638	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		67.00	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	12	2.736	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		69.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	1	2.972	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		75.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	2	3.130	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches
		79.50	343.00	10.00 ± 0.50	52.40 ± 2.00	6.350	mm
CFM	14	2.508	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		63.70	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	12	2.638	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		67.00	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
FRN	14	2.618	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		66.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	12	2.736	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		69.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	1	2.421	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		61.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	2	3.917	13.504	0.394 ± 0.020	2.500 ± 0.079	0.250	inches
		99.50	343.00	10.00 ± 0.50	63.50 ± 2.00	6.350	mm
MR	1	3.311	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		84.10	343.00	5.00 ± 0.50	52.40 ± 2.00	6.350	mm
	3	3.484	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches
		88.50	343.00	10.00 ± 0.50	52.40 ± 2.00	6.350	mm
	5	3.850	13.504	0.394 ± 0.020	2.875 ± 0.079	0.250	inches
		97.80	343.00	10.00 ± 0.50	73.03 ± 2.00	6.350	mm
	10	4.764	13.504	0.394 ± 0.020	4.310 ± 0.079	0.250	inches
		121.00	343.00	10.00 ± 0.50	109.47 ± 2.00	6.350	mm

Lead Tape Specifications: Reeled in accordance with EIA-296-F (cont.)

Series	Code	A max ⁽¹⁾	B max	C	D ⁽²⁾	Tape	Unit
MWW	1	3.563	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches
		90.50	343.00	10.00 ± 0.50	52.40 ± 2.00	6.350	mm
	3	3.736	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches
		94.90	343.00	10.00 ± 0.50	52.40 ± 2.00	6.350	mm
5	4.094	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches	
	104.00	343.00	10.00 ± 0.50	52.40 ± 2.00	6.350	mm	
10	5.118	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches	
	130.00	343.00	10.00 ± 0.50	52.40 ± 2.00	6.350	mm	
RC	14	2.787	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches
		70.80	343.00	10.00 ± 0.50	52.40 ± 2.00	6.350	mm
12	2.756	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches	
	70.00	343.00	10.00 ± 0.50	52.40 ± 2.00	6.350	mm	
RNF	18	2.756 ± 0.118	11.811 ± 0.197	0.197 ± 0.020	2.047 ± 0.020	0.250	inches
		70.00 ± 3.00	300.00 ± 5.00	5.00 ± 0.50	52.00 ± 0.50	6.350	mm
	14	2.756 ± 0.118	11.811 ± 0.197	0.197 ± 0.020	2.047 ± 0.020	0.250	inches
		70.00 ± 3.00	300.00 ± 5.00	5.00 ± 0.50	52.00 ± 0.50	6.350	mm
	12	2.756 ± 0.118	11.811 ± 0.197	0.197 ± 0.020	2.047 ± 0.020	0.250	inches
		70.00 ± 3.00	300.00 ± 5.00	5.00 ± 0.50	52.00 ± 0.50	6.350	mm
	1	2.756 ± 0.118	11.811 ± 0.197	0.197 ± 0.020	2.047 ± 0.020	0.250	inches
		70.00 ± 3.00	300.00 ± 5.00	5.00 ± 0.50	52.00 ± 0.50	6.350	mm
2	2.756 ± 0.118	11.811 ± 0.197	0.197 ± 0.020	2.047 ± 0.020	0.250	inches	
	70.00 ± 3.00	300.00 ± 5.00	5.00 ± 0.50	52.00 ± 0.50	6.350	mm	
RNMF	14	2.756 ± 0.118	11.811 ± 0.197	0.197 ± 0.020	2.047 ± 0.020	0.250	inches
		70.00 ± 3.00	300.00 ± 5.00	5.00 ± 0.50	52.00 ± 0.50	6.350	mm
12	2.756 ± 0.118	11.811 ± 0.197	0.197 ± 0.020	2.047 ± 0.020	0.250	inches	
	70.00 ± 3.00	300.00 ± 5.00	5.00 ± 0.50	52.00 ± 0.50	6.350	mm	
RSF	12	2.736	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		69.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
	1	2.815	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		71.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
	2	3.524	13.504	0.394 ± 0.020	2.500 ± 0.079	0.250	inches
		89.50	343.00	10.00 ± 0.50	63.50 ± 2.00	6.35	mm
3	3.740	12.008	0.394 ± 0.020	2.874 ± 0.079	0.250	inches	
	95.00	305.00	10.00 ± 0.50	73.00 ± 2.00	6.35	mm	
5	4.331	12.008	0.394 ± 0.020	3.465 ± 0.079	0.250	inches	
	110.00	305.00	10.00 ± 0.50	88.00 ± 2.00	6.35	mm	
RSMF	12	2.618	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		66.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
	1	2.736	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		69.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
	2	2.815	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		71.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
3	3.524	13.504	0.394 ± 0.020	2.500 ± 0.079	0.250	inches	
	89.50	343.00	10.00 ± 0.50	63.50 ± 2.00	6.35	mm	
5	3.740	12.008	0.394 ± 0.020	2.874 ± 0.079	0.250	inches	
	95.00	305.00	10.00 ± 0.50	73.00 ± 2.00	6.35	mm	
RSPF	12	2.618	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		66.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
	1	2.736	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		69.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
2	2.815	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches	
	71.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm	
3	3.524	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches	
	89.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm	


Lead Tape Specifications: Reeled in accordance with EIA-296-F (cont.)							
Series	Code	A max ⁽¹⁾	B max	C	D ⁽²⁾	Tape	Unit
SP	3A	2.063	11.000	0.394 ± 0.020	2.063 ± 0.079	0.250	inches
		52.40	279.40	10.00 ± 0.50	52.40 ± 2.00	6.35	mm
SPR	12	2.736	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		69.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
	1	3.917	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches
		99.50	343.00	10.00 ± 0.50	52.40 ± 2.00	6.35	mm
TMR	3	6.299	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches
		160.00	343.00	10.00 ± 0.50	52.40 ± 2.00	6.35	mm
	5	6.614	13.504	0.394 ± 0.020	2.063 ± 0.079	0.250	inches
		168.00	343.00	10.00 ± 0.50	52.40 ± 2.00	6.35	mm
WRC	1S	2.756	11.933	0.197 ± 0.020	2.047 ± 0.079	0.236 ± 0.039	inches
		70.00	303.10	5.00 ± 0.50	52.00 ± 2.00	6.00 ± 1.00	mm
	1	2.756	11.933	0.197 ± 0.020	2.047 ± 0.079	0.236 ± 0.039	inches
		70.00	303.10	5.00 ± 0.50	52.00 ± 2.00	6.00 ± 1.00	mm
	2, 2A, 3A, 4A, 5A	2.756	11.933	0.197 ± 0.020	2.047 ± 0.079	0.236 ± 0.039	inches
		70.00	303.10	5.00 ± 0.50	52.00 ± 2.00	6.00 ± 1.00	mm
	3B, 4B, 5B	2.756	11.933	0.197 ± 0.020	2.047 ± 0.079	0.236 ± 0.039	inches
		70.00	303.10	5.00 ± 0.50	52.00 ± 2.00	6.00 ± 1.00	mm
WW	H	2.880	11.000	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		73.15	279.40	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
	1/WWS2	2.880	11.000	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		73.15	279.40	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
	1A	2.880	11.000	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		73.15	279.40	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
	2/WWS3	2.880	11.000	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		73.15	279.40	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
	2A	2.880	11.000	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
		73.15	279.40	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
	3/WWS4	2.880	11.000	0.197 ± 0.020	2.500 ± 0.079	0.250	inches
		73.15	279.40	5.00 ± 0.50	63.50 ± 2.00	6.35	mm
	3A	3.740	11.000	0.394 ± 0.020	2.874 ± 0.079	0.250	inches
		95.00	279.40	10.00 ± 0.50	73.00 ± 2.00	6.35	mm
	4/WWS5	2.500	11.000	0.394 ± 0.020	2.500 ± 0.079	0.250	inches
		63.50	279.40	10.00 ± 0.50	63.50 ± 2.00	6.35	mm
5/WWS7	3.740	11.000	0.394 ± 0.020	2.874 ± 0.079	0.250	inches	
	95.00	279.40	10.00 ± 0.50	73.00 ± 2.00	6.35	mm	
7	5.100	11.000	0.394 ± 0.020	2.874 ± 0.079	0.250	inches	
	129.54	279.40	10.00 ± 0.50	73.00 ± 2.00	6.35	mm	
7B/WWS10	5.100	11.000	0.394 ± 0.020	2.874 ± 0.079	0.250	inches	
	129.54	279.40	10.00 ± 0.50	73.00 ± 2.00	6.35	mm	
10	5.100	11.000	0.394 ± 0.020	2.874 ± 0.079	0.250	inches	
	129.54	279.40	10.00 ± 0.50	73.00 ± 2.00	6.35	mm	

Dimension "E": This is a non-critical dimension that does not have a tolerance in the standard.
 Range of diameters is from 0.547 inches (13.90 mm) to 1.500 inches (38.10 mm).

- (1) Reference value only. The "A" dimension shall be governed by the overall length of the taped component.
 The distance between flanges shall be 0.059 inches (1.50 mm) to 0.315 (8.00 mm) greater than the overall component.
- (2) The given dimension "D" expresses the standard width spacing. A 26 mm narrow spacing is available as option "N" packaging code.


Chip Array Resistors Packaging Specifications

RAVF10 - RAVF32 Packaging Specifications

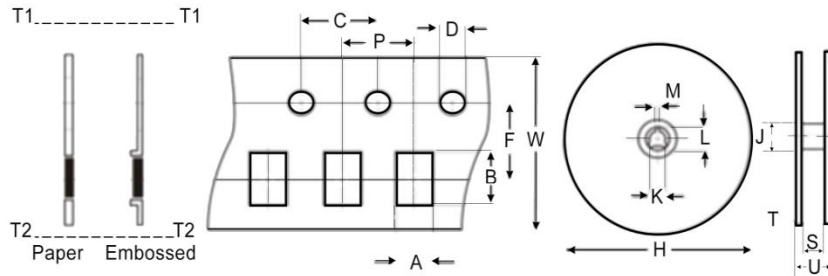


Symbol	FEATURES	RAVF102D	RAVF104D	RAVF162D	RAVF164D / RAVF328	RAVF324D	Unit	
	Material Pieces / Reel	Paper - 10000	Paper - 10000	Paper - 5000	Paper - 5000	Embossed - 4000		
A	Pocket Width	0.046 ± 0.004 1.17 ± 0.10	0.051 ± 0.008 1.30 ± 0.20	0.071 ± 0.004 1.80 ± 0.10	0.079 ± 0.008 2.00 ± 0.20	0.134 ± 0.004 3.40 ± 0.10	inches mm	
B	Pocket Length	0.046 ± 0.004 1.17 ± 0.10	0.091 ± 0.008 2.30 ± 0.20	0.071 ± 0.004 1.80 ± 0.10	0.142 ± 0.008 3.60 ± 0.20	0.220 ± 0.004 5.60 ± 0.10	inches mm	
C	Pin Spacing	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm	
D	Pin Diameter	0.059 ± 0.004 1.50 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.039 ± 0.004 1.00 ± 0.10	inches mm	
F	Pin-Pocket C/L	0.138 ± 0.002 3.50 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	0.217 ± 0.002 5.50 ± 0.05	inches mm	
H	Reel Diameter	7.008 ± 0.079 178.00 ± 2.00	7.008 ± 0.079 178.00 ± 2.00	7.008 ± 0.079 178.00 ± 2.00	7.008 ± 0.079 178.00 ± 2.00	7.008 ± 0.079 178.00 ± 2.00	inches mm	
J	Hub Diameter	1.969 50.00	1.969 50.00	1.969 50.00	1.969 50.00	2.362 60.00	inches mm	
K	Hole Diameter	0.512 ± 0.039 13.00 ± 1.00	0.512 ± 0.039 13.00 ± 1.00	0.512 ± 0.039 13.00 ± 1.00	0.512 ± 0.039 13.00 ± 1.00	0.512 ± 0.008 13.00 ± 0.20	inches mm	
L	Key Diameter	0.827 ± 0.039 21.00 ± 1.00	0.827 ± 0.039 21.00 ± 1.00	0.827 ± 0.039 21.00 ± 1.00	0.827 ± 0.039 21.00 ± 1.00	0.827 ± 0.031 21.00 ± 0.80	inches mm	
M	Key Width	0.079 ± 0.039 2.00 ± 1.00	0.079 ± 0.039 2.00 ± 1.00	0.079 ± 0.039 2.00 ± 1.00	0.079 ± 0.039 2.00 ± 1.00	0.079 ± 0.020 2.00 ± 0.50	inches mm	
P	Pocket Spacing	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm	
S	Reel Inside Width	0.531 ± 0.079 13.50 ± 2.00	0.531 ± 0.079 13.50 ± 2.00	0.531 ± 0.079 13.50 ± 2.00	0.531 ± 0.079 13.50 ± 2.00	0.354 ± 0.012 9.00 ± 0.30	inches mm	
T	Side Thickness	0.031 ± 0.008 0.80 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	-	inches mm	
T1	Strip Thickness	0.039 max 1.00 max	0.039 max 1.00 max	0.020 max 0.50 max	0.039 max 1.00 max	0.010 ± 0.002 0.25 ± 0.05	inches mm	
T2	Total Thickness	0.055 max 1.40 max	0.055 max 1.40 max	0.039 max 1.00 max	0.055 max 1.40 max	0.043 max 1.10 max	inches mm	
U	Reel Outside Width	-					0.449 11.40	inches mm
W	Strip Width	0.315 ± 0.008 8.00 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.472 ± 0.008 12.00 ± 0.20	inches mm	

RACF16 - RACF64 Packaging Specifications

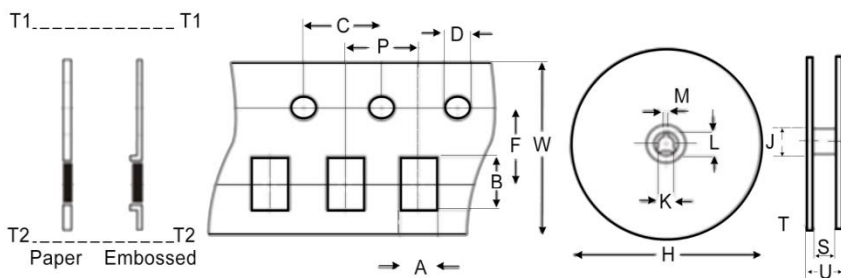


Symbol	FEATURES	RACF164D	RACF324D	RACF408M	RACF648N / RACF648R	Unit
	Material Pieces / Reel	Paper - 5000	Embossed - 4000	Embossed - 4000	Embossed - 4000	
A	Pocket Width	0.079 ± 0.008 2.00 ± 0.20	0.138 ± 0.004 3.50 ± 0.10	0.098 ± 0.004 2.50 ± 0.10	0.138 ± 0.004 3.50 ± 0.10	inches mm
B	Pocket Length	0.142 ± 0.008 3.60 ± 0.20	0.224 ± 0.004 5.70 ± 0.10	0.173 ± 0.004 4.40 ± 0.10	0.266 ± 0.004 6.75 ± 0.10	inches mm
C	Pin Spacing	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
D	Pin Diameter	0.059 ± 0.004 1.50 ± 0.10	0.039 ± 0.004 1.00 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	inches mm
F	Pin-to-Pocket Center	0.138 ± 0.002 3.50 ± 0.05	0.217 ± 0.002 5.50 ± 0.05	0.217 ± 0.020 5.50 ± 0.50	0.217 ± 0.002 5.50 ± 0.05	inches mm
H	Reel Diameter	7.008 ± 0.079 178.00 ± 2.00	7.008 ± 0.079 178.00 ± 2.00	7.008 ± 0.079 178.00 ± 2.00	7.008 ± 0.079 178.00 ± 2.00	inches mm
J	Hub Diameter	1.969 50.00	2.362 ± 0.039 60.00 ± 1.00	2.362 ± 0.039 60.00 ± 1.00	2.362 ± 0.039 60.00 ± 1.00	inches mm
K	Hole Diameter	0.512 ± 0.039 13.00 ± 1.00	0.512 ± 0.008 13.00 ± 0.20	0.512 ± 0.008 13.00 ± 0.20	0.512 ± 0.008 13.00 ± 0.20	inches mm
L	Key Diameter	0.827 ± 0.039 21.00 ± 1.00	0.827 ± 0.031 21.00 ± 0.80	0.827 ± 0.031 21.00 ± 0.80	0.827 ± 0.031 21.00 ± 0.80	inches mm
M	Key Width	0.079 ± 0.039 2.00 ± 1.00	0.079 ± 0.020 2.00 ± 0.50	0.079 ± 0.020 2.00 ± 0.50	0.079 ± 0.020 2.00 ± 0.50	inches mm
P	Pocket Spacing	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
S	Reel Inside Width	0.531 ± 0.079 13.50 ± 2.00	0.354 ± 0.012 9.00 ± 0.30	0.354 ± 0.012 9.00 ± 0.30	0.354 ± 0.012 9.00 ± 0.30	inches mm
T	Reel Side Thickness	0.031 ± 0.008 0.80 ± 0.20	-			inches mm
T1	Strip Thickness	0.020 max 0.50 max	0.010 ± 0.002 0.25 ± 0.05	0.010 ± 0.002 0.25 ± 0.05	0.010 ± 0.002 0.25 ± 0.05	inches mm
T2	Total Thickness	0.039 max 1.00 max	0.043 max 1.10 max	0.043 max 1.10 max	0.043 max 1.10 max	inches mm
U	Reel Outside Width	-	0.449 ± 0.039 11.40 ± 1.00	0.449 ± 0.039 11.40 ± 1.00	0.449 ± 0.039 11.40 ± 1.00	inches mm
W	Strip Width	0.315 ± 0.008 8.00 ± 0.20	0.472 ± 0.008 12.00 ± 0.20	0.472 ± 0.008 12.00 ± 0.20	0.472 ± 0.008 12.00 ± 0.20	inches mm

RMCS Packaging Specifications – Paper Tape

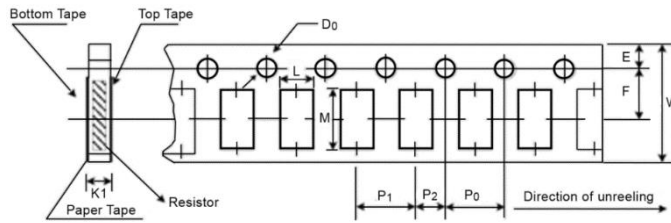


Type	L	M	W	E	F	Unit
RMCS0201	0.015 ± 0.002	0.027 ± 0.002	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	0.38 ± 0.05	0.68 ± 0.05	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
RMCS0402	0.026 ± 0.004	0.045 ± 0.004	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	0.65 ± 0.10	1.15 ± 0.10	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
RMCS0603	0.043 ± 0.004	0.075 ± 0.004	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.10 ± 0.10	1.90 ± 0.10	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
RMCS0805	0.063 ± 0.004	0.094 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.60 ± 0.10	2.40 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
RMCS1206	0.075 ± 0.004	0.138 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.90 ± 0.10	3.50 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
RMCS1210	0.110 ± 0.004	0.138 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	2.80 ± 0.10	3.50 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
Type	P ₀	P ₁	P ₂	ØD ₀	K ₁ / K ₂	Unit
RMCS0201	0.157 ± 0.004	0.079 ± 0.002	0.079 ± 0.002	0.059 ± 0.004	0.017 ± 0.008	inches
	4.00 ± 0.10	2.00 ± 0.05	2.00 ± 0.05	1.50 ± 0.10	0.42 ± 0.20	mm
RMCS0402	0.157 ± 0.004	0.079 ± 0.002	0.079 ± 0.002	0.059 ± 0.004	0.018 ± 0.004	inches
	4.00 ± 0.10	2.00 ± 0.05	2.00 ± 0.05	1.50 ± 0.10	0.45 ± 0.10	mm
RMCS0603	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.028 ± 0.004	inches
	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	0.70 ± 0.10	mm
RMCS0805	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.033 ± 0.004	inches
	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	0.85 ± 0.10	mm
RMCS1206	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.033 ± 0.004	inches
	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	0.85 ± 0.10	mm
RMCS1210	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.033 ± 0.004	inches
	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	0.85 ± 0.10	mm

RMCS Packaging Specifications – Embossed Plastic Tape

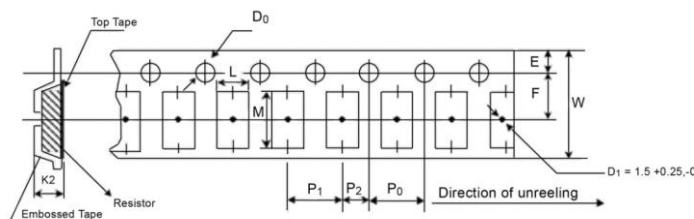


Type	L	M	W	E	F	Unit
RMCS2010	0.110 ± 0.008	0.217 ± 0.008	0.472 ± 0.012	0.069 ± 0.004	0.217 ± 0.002	inches
	2.80 ± 0.20	5.50 ± 0.20	12.00 ± 0.30	1.75 ± 0.10	5.50 ± 0.05	mm
RMCS2512	0.138 ± 0.008	0.264 ± 0.008	0.472 ± 0.012	0.069 ± 0.004	0.217 ± 0.002	inches
	3.50 ± 0.20	6.70 ± 0.20	12.00 ± 0.30	1.75 ± 0.10	5.50 ± 0.05	mm
Type	P ₀	P ₁	P ₂	ØD ₀	K ₁ / K ₂	Unit
RMCS2010	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.047 - 0	inches
	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	1.20 - 0	mm
RMCS2512	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.047 - 0	inches
	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	1.20 - 0	mm

RNCS Packaging Specifications – Paper Tape

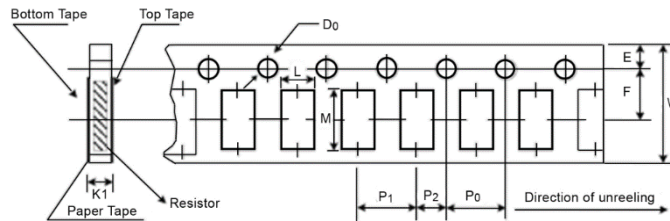


Type	L	M	W	E	F	Unit
RNCS0402	0.028 ± 0.002	0.046 ± 0.002	0.315 ± 0.004	0.069 ± 0.004	0.138 ± 0.002	inches
	0.70 ± 0.05	1.16 ± 0.05	8.00 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	mm
RNCS0603	0.043 ± 0.002	0.075 ± 0.002	0.315 ± 0.004	0.069 ± 0.004	0.138 ± 0.002	inches
	1.10 ± 0.05	1.90 ± 0.05	8.00 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	mm
RNCS0805	0.063 ± 0.002	0.093 ± 0.002	0.315 ± 0.004	0.069 ± 0.004	0.138 ± 0.002	inches
	1.60 ± 0.05	2.37 ± 0.05	8.00 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	mm
RNCS1206	0.079 ± 0.002	0.140 ± 0.002	0.315 ± 0.004	0.069 ± 0.004	0.138 ± 0.002	inches
	2.00 ± 0.05	3.55 ± 0.05	8.00 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	mm
Type	P ₀	P ₁	P ₂	∅D ₀	K ₁ / K ₂	Unit
RNCS0402	0.157 ± 0.004	0.079 ± 0.002	0.079 ± 0.002	0.061 ± 0.002	0.016 ± 0.001	inches
	4.00 ± 0.10	2.00 ± 0.05	2.00 ± 0.05	1.55 ± 0.05	0.40 ± 0.03	mm
RNCS0603	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.061 ± 0.002	0.024 ± 0.001	inches
	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.55 ± 0.05	0.60 ± 0.03	mm
RNCS0805	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.061 ± 0.002	0.030 ± 0.002	inches
	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.55 ± 0.05	0.75 ± 0.05	mm
RNCS1206	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.061 ± 0.002	0.030 ± 0.002	inches
	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.55 ± 0.05	0.75 ± 0.05	mm

RNCS Packaging Specifications – Embossed Plastic Tape

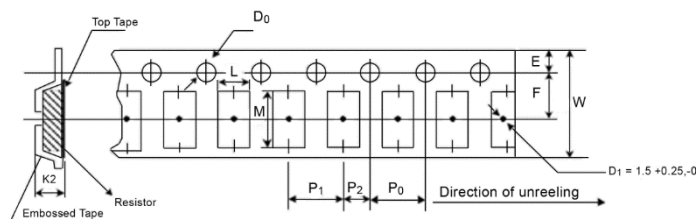


Type	L	M	W	E	F	Unit
RNCS2010	0.112 ± 0.004	0.215 ± 0.004	0.472 ± 0.004	0.069 ± 0.004	0.217 ± 0.002	inches
	2.85 ± 0.10	5.45 ± 0.10	12.00 ± 0.10	1.75 ± 0.10	5.50 ± 0.05	mm
RNCS2512	0.134 ± 0.004	0.262 ± 0.004	0.472 ± 0.004	0.069 ± 0.004	0.217 ± 0.002	inches
	3.40 ± 0.10	6.65 ± 0.10	12.00 ± 0.10	1.75 ± 0.10	5.50 ± 0.05	mm
Type	P ₀	P ₁	P ₂	∅D ₀	K ₁ / K ₂	Unit
RNCS2010	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.061 ± 0.002	0.039 ± 0.008	inches
	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.55 ± 0.05	1.00 ± 0.20	mm
RNCS2512	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.061 ± 0.002	0.039 ± 0.008	inches
	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.55 ± 0.05	1.00 ± 0.20	mm

RPC Packaging Specifications – Paper Tape

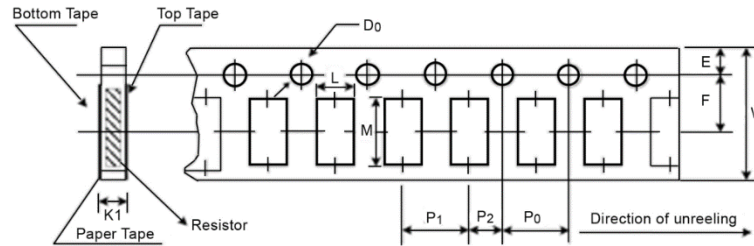


Type	L	M	W	E	F	Unit
RPC0603	0.043 ± 0.004	0.075 ± 0.004	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.10 ± 0.10	1.90 ± 0.10	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
RPC0805	0.063 ± 0.004	0.094 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.60 ± 0.10	2.40 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
RPC1206	0.075 ± 0.004	0.138 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.90 ± 0.10	3.50 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
RPC1210	0.110 ± 0.004	0.138 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	2.80 ± 0.10	3.50 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
Type	P ₀	P ₁	P ₂	ØD ₀	K ₁ / K ₂	Unit
RPC0603	0.157 ± 0.004	0.157 ± 0.394	0.079 ± 0.002	0.059 ± 0.004	0.028 ± 0.004	inches
	4.00 ± 0.10	4.00 ± 10.00	2.00 ± 0.05	1.50 ± 0.10	0.70 ± 0.10	mm
RPC0805	0.157 ± 0.004	0.157 ± 0.394	0.079 ± 0.002	0.059 ± 0.004	0.033 ± 0.004	inches
	4.00 ± 0.10	4.00 ± 10.00	2.00 ± 0.05	1.50 ± 0.10	0.85 ± 0.10	mm
RPC1206	0.157 ± 0.004	0.157 ± 0.394	0.079 ± 0.002	0.059 ± 0.004	0.033 ± 0.004	inches
	4.00 ± 0.10	4.00 ± 10.00	2.00 ± 0.05	1.50 ± 0.10	0.85 ± 0.10	mm
RPC1210	0.157 ± 0.004	0.157 ± 0.394	0.079 ± 0.002	0.059 ± 0.004	0.033 ± 0.004	inches
	4.00 ± 0.10	4.00 ± 10.00	2.00 ± 0.05	1.50 ± 0.10	0.85 ± 0.10	mm

RPC Packaging Specifications – Embossed Plastic Tape

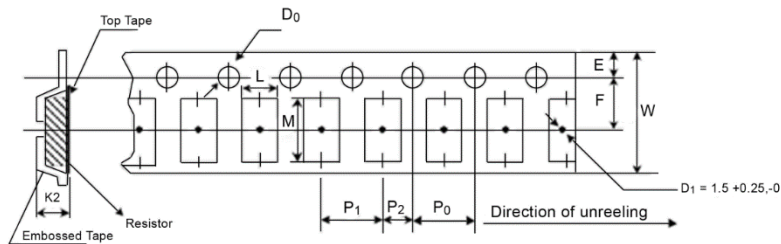


Type	L	M	W	E	F	Unit
RPC2010	0.110 ± 0.008	0.217 ± 0.008	0.472 ± 0.012	0.069 ± 0.004	0.217 ± 0.002	inches
	2.80 ± 0.20	5.50 ± 0.20	12.00 ± 0.30	1.75 ± 0.10	5.50 ± 0.05	mm
RPC2512	0.138 ± 0.008	0.264 ± 0.008	0.472 ± 0.012	0.069 ± 0.004	0.217 ± 0.002	inches
	3.50 ± 0.20	6.70 ± 0.20	12.00 ± 0.30	1.75 ± 0.10	5.50 ± 0.05	mm
Type	P ₀	P ₁	P ₂	ØD ₀	K ₁ / K ₂	Unit
RPC2010	0.157 ± 0.004	0.157 ± 0.394	0.079 ± 0.002	0.059 ± 0.004	0.047 - 0	inches
	4.00 ± 0.10	4.00 ± 10.00	2.00 ± 0.05	1.50 ± 0.10	1.20 - 0	mm
RPC2512	0.157 ± 0.004	0.157 ± 0.394	0.079 ± 0.002	0.059 ± 0.004	0.047 - 0	inches
	4.00 ± 0.10	4.00 ± 10.00	2.00 ± 0.05	1.50 ± 0.10	1.20 - 0	mm

CSS Packaging Specifications – Embossed Plastic Tape

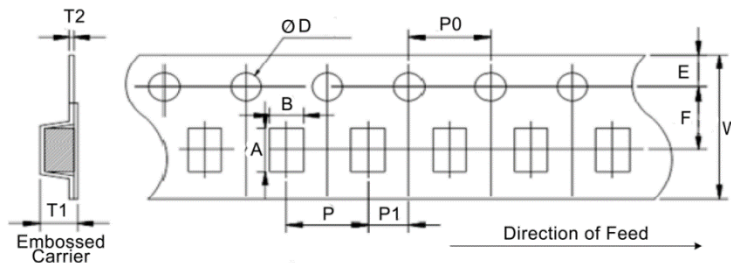


Type	A	B	W	E	F	T1	Unit
CSS1206	0.137 ± 0.004 3.48 ± 0.10	0.072 ± 0.004 1.83 ± 0.10	0.315 ± 0.006 8.00 ± 0.15	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.004 3.50 ± 0.10	0.043 ± 0.004 1.10 ± 0.10	inches mm
CSS2010	0.215 ± 0.004 5.45 ± 0.10	0.114 ± 0.004 2.90 ± 0.10	0.472 ± 0.006 12.00 ± 0.15	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.004 5.50 ± 0.10	0.052 ± 0.004 1.33 ± 0.10	inches mm
CSS2512	0.266 ± 0.004 6.75 ± 0.10	0.138 ± 0.004 3.50 ± 0.10	0.472 ± 0.006 12.00 ± 0.15	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.004 5.50 ± 0.10	0.051 ± 0.004 1.30 ± 0.10	inches mm
CSS2725	0.281 ± 0.004 7.15 ± 0.10	0.266 ± 0.004 6.75 ± 0.10	0.472 ± 0.006 12.00 ± 0.15	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.004 5.50 ± 0.10	0.077 ± 0.004 1.95 ± 0.10	inches mm
CSS2728	0.281 ± 0.004 7.15 ± 0.10	0.303 ± 0.004 7.70 ± 0.10	0.472 ± 0.006 12.00 ± 0.15	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.004 5.50 ± 0.10	0.057 ± 0.004 1.45 ± 0.10	inches mm
CSS4527	0.465 ± 0.004 11.80 ± 0.10	0.283 ± 0.004 7.20 ± 0.10	0.945 ± 0.006 24.00 ± 0.15	0.069 ± 0.004 1.75 ± 0.10	0.453 ± 0.004 11.50 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	inches mm
Type	T2	P	P0	P1	ØD	Unit	
CSS1206	0.008 ± 0.002 0.20 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	inches mm	
CSS2010	0.009 ± 0.002 0.23 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	inches mm	
CSS2512	0.008 ± 0.002 0.20 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	inches mm	
CSS2725	0.010 ± 0.002 0.25 ± 0.05	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	inches mm	
CSS2728	0.010 ± 0.002 0.25 ± 0.05	0.472 ± 0.004 12.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	inches mm	
CSS4527	0.012 ± 0.004 0.30 ± 0.10	0.472 ± 0.004 12.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	inches mm	

RHC Packaging Specifications – Embossed Plastic Tape

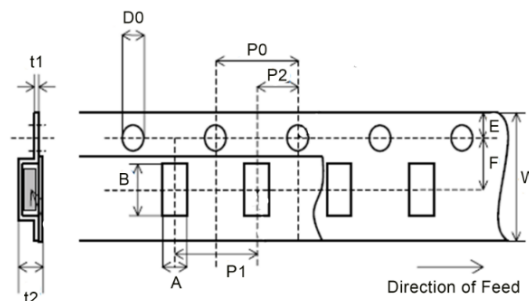


Type	A	B	W	F	E	P1	Unit
RHC2512	0.134 ± 0.004 3.40 ± 0.10	0.260 ± 0.004 6.60 ± 0.10	0.472 ± 0.008 12.00 ± 0.20	0.217 ± 0.002 5.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	Inches mm
Type	P2	P0	D0	t1	t2	Unit	
RHC2512	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.061 ± 0.002 1.55 ± 0.05	0.010 ± 0.002 0.25 ± 0.05	0.039 ± 0.004 1.00 ± 0.10	Inches mm	

RHC Reel Specifications




Type	A	B	C	D	E	W	W2	Unit
RHC2512	7.087 ± 0.118 180.00 ± 3.00	2.362 ± 0.039 60.00 ± 1.00	0.512 ± 0.008 13.00 ± 0.20	0.827 ± 0.031 21.00 ± 0.80	0.079 ± 0.020 2.00 ± 0.50	0.512 ± 0.012 13.00 ± 0.30	0.606 ± 0.039 15.40 ± 1.00	Inches mm

CSR / CSRN Packaging Specification – Paper Tape

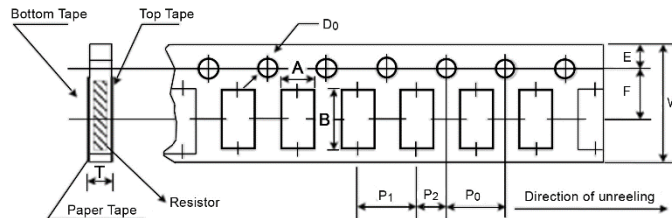

Type	A	B	W	E	F	P0	P1	P2	D0	T	Unit
0201	0.015 ± 0.002 0.38 ± 0.05	0.027 ± 0.002 0.68 ± 0.05	0.315 ± 0.004 8.00 ± 0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.004 2.00 ± 0.10	0.059 + 0.004, -0 1.50 + 0.10, -0	0.017 ± 0.008 0.42 ± 0.20	inches mm
0402	0.026 ± 0.004 0.65 ± 0.10	0.045 ± 0.004 1.15 ± 0.10	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059 + 0.004, -0 1.50 + 0.10, -0	0.018 ± 0.004 0.45 ± 0.10	inches mm
0603	0.043 ± 0.004 1.10 ± 0.10	0.075 ± 0.004 1.90 ± 0.10	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059 + 0.004, -0 1.50 + 0.10, -0	0.028 ± 0.004 0.70 ± 0.10	inches mm
0805	0.063 ± 0.004 1.60 ± 0.10	0.094 ± 0.008 2.40 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059 + 0.004, -0 1.50 + 0.10, -0	0.033 ± 0.004 0.85 ± 0.10	inches mm
1206	0.075 ± 0.004 1.90 ± 0.10	0.138 ± 0.008 3.50 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059 + 0.004, -0 1.50 + 0.10, -0	0.033 ± 0.004 0.85 ± 0.10	inches mm
1210	0.114 ± 0.004 2.90 ± 0.10	0.138 ± 0.008 3.50 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059 + 0.004, -0 1.50 + 0.10, -0	0.033 ± 0.004 0.85 ± 0.10	inches mm

CSR / CSRN Packaging Specification – Embossed Plastic Tape

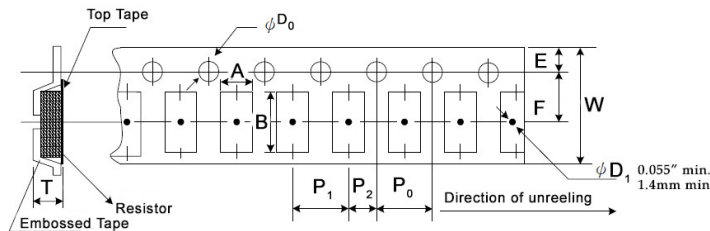

Type	A	B	W	E	F	P0	P1	P2	D0	T	Unit
2010	0.110 ± 0.004 2.80 ± 0.10	0.217 ± 0.004 5.50 ± 0.10	0.472 ± 0.012 12.00 ± 0.30	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.157 ± 0.002 4.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.059 + 0.004, -0 1.50 + 0.10, -0	0.039 ± 0.008 1.00 ± 0.20	inches mm
2512	0.133 ± 0.004 3.38 ± 0.10	0.263 ± 0.004 6.68 ± 0.10	0.472 ± 0.012 12.00 ± 0.30	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.004 5.50 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.061 + 0.002, -0 1.55 + 0.05, -0	0.057 ± 0.008 1.45 ± 0.20	inches mm
1225	0.133 ± 0.004 3.38 ± 0.10	0.263 ± 0.004 6.68 ± 0.10	0.472 ± 0.012 12.00 ± 0.30	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.004 5.50 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.061 + 0.002, -0 1.55 + 0.05, -0	0.057 ± 0.008 1.45 ± 0.20	inches mm
0815	0.098 ± 0.008 2.50 ± 0.20	0.175 ± 0.008 4.45 ± 0.20	0.472 ± 0.012 12.00 ± 0.30	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.157 ± 0.002 4.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.061 + 0.004, -0 1.55 + 0.10, -0	0.047 ± 0.008 1.20 ± 0.20	inches mm
0830	0.098 ± 0.008 2.50 ± 0.20	0.327 ± 0.008 8.30 ± 0.20	0.630 ± 0.012 16.00 ± 0.30	0.069 ± 0.004 1.75 ± 0.10	0.307 ± 0.002 7.80 ± 0.05	0.157 ± 0.002 4.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.059 + 0.004, -0 1.50 + 0.10, -0	0.047 ± 0.008 1.20 ± 0.20	inches mm

Packaging: Chips per EIA Standard RS-481

Reel Specifications								
Reel Dimensions	A	B	C	D	E	W	W2	Unit
7" Paper Tape	7.008 ± 0.039	2.362 ± 0.039	0.531 ± 0.028	0.795 ± 0.031	0.059 ± 0.020	0.331 +0.059/-0	0.453 ± 0.039	Inches
	178.00 ± 1.00	60.00 ± 1.00	13.50 ± 0.70	20.20 ± 0.80	1.50 ± 0.50	8.40 +1.50/-0	11.50 ± 1.00	mm
Embossed Plastic Tape	7.008 ± 0.039	2.362 ± 0.039	0.531 ± 0.028	0.795 ± 0.031	0.059 ± 0.020	0.531 ± 0.039	0.610 ± 0.039	Inches
	178.00 ± 1.00	60.00 ± 1.00	13.50 ± 0.70	20.20 ± 0.80	1.50 ± 0.50	13.50 ± 1.00	15.50 ± 1.00	mm

Tape Specifications									
A	B	C	D	E	F	G	H	J (1)	Unit
0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.039 1.00	0.069 ± 0.002 1.75 ± 0.05	0.197 5.00	0.138 ± 0.002 3.50 ± 0.05	0.315 ± 0.004 8.00 ± 0.10	inches mm


(1) For RMCF and RNCF, package size 2010 and 2512, dimensions are 0.472 ± 0.012 inches (12.00 ± 0.30 mm).

Tape Specifications (cont.)					
Type	K1	K2	L	M	Unit
HVC0603, RGC0603, RMCF0603, RNCF0603	0.043 max 1.10 max	-	0.043 ± 0.008 1.10 ± 0.20	0.075 ± 0.008 1.90 ± 0.20	inches mm
FCR0805, HMC0805, HVC0805, RGC0805, RMCF0805, RNCF0805	0.043 max 1.10 max	-	0.065 ± 0.008 1.65 ± 0.20	0.094 ± 0.008 2.40 ± 0.20	inches mm
FCR1206, HMC1206, HVC1206, RGC1206, RMCF1206, RNCF1206, RMCF1210, RNCF1210	0.043 max 1.10 max	0.094 max 2.40 max	0.079 ± 0.004 2.00 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm
FCR1210	-	0.094 max 2.40 max	0.110 ± 0.008 2.80 ± 0.20	0.142 ± 0.008 3.60 ± 0.20	inches mm
HVC2010, RMCF2010, RNCF2010	-	0.094 max 2.40 max	0.110 ± 0.008 2.80 ± 0.20	0.217 ± 0.008 5.50 ± 0.20	inches mm
HVC2512, RMCF2512, RNCF2512	-	0.094 max 2.40 max	0.150 ± 0.008 3.80 ± 0.20	0.264 ± 0.008 6.70 ± 0.20	inches mm

Note: For reel quantities, please see individual product specifications.

Chip Resistors Packaging Specifications

Packaging Specification - 0201 and 0402 Chip Size (2 mm pitch)

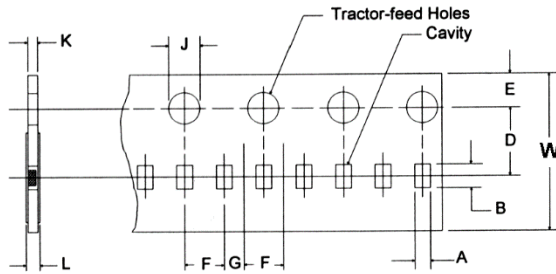


Standard Tape Packaging	
2 mm Pitch - 10000 per reel	
Reel diameter - 7 inches (178 mm)	
Reel width - 0.315 inches (8 mm)	

A	B	W	D	E	Unit
0.026 ± 0.004	0.045 ± 0.004	0.315 ± 0.008	0.138 ± 0.002	0.069 ± 0.004	inches
0.65 ± 0.10	1.15 ± 0.10	8.00 ± 0.20	3.50 ± 0.05	1.75 ± 0.10	mm
F	G	J	K	L	Unit
0.079 ± 0.002	0.039 ± 0.002	0.059 ± 0.004	0.016 ± 0.002	0.020 max	inches
2.00 ± 0.05	1.00 ± 0.05	1.50 ± 0.10	0.40 ± 0.05	0.50 max	mm

SMD Resistors Packaging Specifications

SM Packaging

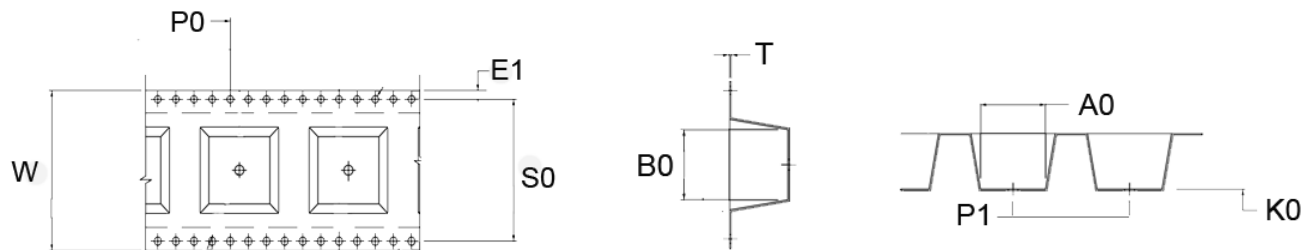

Product	W	P ₀	E ₁	T	S ₀	P ₁	A ₀	K ₀	B ₀	Unit
SM2615	0.630 ± 0.012	0.157	0.069	0.018	-	0.315	0.161	0.159	0.302	inches
	16.00 ± 0.30	4.00	1.75	0.45	-	8.00	4.10	4.03	7.66	mm
SM4124	0.945 ± 0.012	0.157	0.069	0.018	-	0.472	0.257	0.206	0.457	inches
	24.00 ± 0.30	4.00	1.75	0.45	-	12.00	6.53	5.22	11.60	mm
SM6227	1.260 ± 0.012	0.157	0.069	0.018	1.118	0.472	0.276	0.271	0.665	inches
	32.00 ± 0.30	4.00	1.75	0.45	28.40	12.00	7.01	6.88	16.89	mm
SM8035	1.732 ± 0.012	0.157	0.069	0.018	1.591	0.630	0.343	0.396	0.856	inches
	44.00 ± 0.30	4.00	1.75	0.45	40.40	16.00	8.71	10.05	21.73	mm

Chip Resistors – Part Marking Instructions



1% Marking

The nominal resistance is marked on the surface of the overcoating with the use of 4 digit markings.
0201 and 0402 are not marked.

5% Marking

The nominal resistance is marked on the surface of the overcoating with the use of 3 digit markings.
0201 and 0402 are not marked.

For shared E24 / E96 values, 1% tolerance product may be marked with three-digit marking instead of the standard four-digit marking for all other E96 values. All E24 values available in 1% tolerance are also marked with three digit marking. Standard HVC is unmarked.

Mark Instructions for 0603 1% Chip Resistor (per EIA-J)

A two-digit number is assigned to each standard R-Value (E96) as shown in the chart below. This is followed by one alpha character which is used as a multiplier. Each letter from “Y” – “F” represents a specific multiplier as follows:

Y = 0.1	B = 100	E = 100,000
X = 1	C = 1,000	F = 1,000,000
A = 10	D = 10,000	

EXAMPLE:

Chip Marking	Explanation	Value
01B	01 means 10.0 and B = 100	10.0 x 100 = 1 K ohm
25C	25 means 17.8 and C = 1,000	17.8 x 1,000 = 17.8 K ohm
93D	93 means 90.9 and D = 10,000	90.9 x 10,000 = 909 K ohm

E96											
1%	#	1%	#	1%	#	1%	#	1%	#	1%	#
10.0	01	14.7	17	21.5	33	31.6	49	46.4	65	68.1	81
10.2	02	15.0	18	22.1	34	32.4	50	47.5	66	69.8	82
10.5	03	15.4	19	22.6	35	33.2	51	48.7	67	71.5	83
10.7	04	15.8	20	23.2	36	34.0	52	49.9	68	73.2	84
11.0	05	16.2	21	23.7	37	34.8	53	51.1	69	75.0	85
11.3	06	16.5	22	24.3	38	35.7	54	52.3	70	76.8	86
11.5	07	16.9	23	24.9	39	36.5	55	53.6	71	78.7	87
11.8	08	17.4	24	25.5	40	37.4	56	54.9	72	80.6	88
12.1	09	17.8	25	26.1	41	38.3	57	56.2	73	82.5	89
12.4	10	18.2	26	26.7	42	39.2	58	57.6	74	84.5	90
12.7	11	18.7	27	27.4	43	40.2	59	59.0	75	86.6	91
13.0	12	19.1	28	28.0	44	41.2	60	60.4	76	88.7	92
13.3	13	19.6	29	28.7	45	42.2	61	61.9	77	90.9	93
13.7	14	20.0	30	29.4	46	43.2	62	63.4	78	93.1	94
14.0	15	20.5	31	30.1	47	44.2	63	64.9	79	95.3	95
14.3	16	21.0	32	30.9	48	45.3	64	66.5	80	97.6	96


General Product Information

Temperature Coefficient Codes			
Stackpole TC Code	MIL TC Code	Industry Std TC Code	Temperature Coefficient
M	N/A	-	±300 ppm/°C
L	N/A	T0	±200 ppm/°C
D	D	T1	±100 ppm/°C
C	C	T2	±50 ppm/°C
E	E	T9	±25 ppm/°C
S	N/A	T10	±15 ppm/°C
T	N/A	T13	±10 ppm/°C
Y	N/A	T16	±5 ppm/°C

Tolerance Codes		Resistance Values	
Stackpole/MIL Reference	Tolerance	Stackpole Standard for Nominal Values & Tolerances	
		Series	Tolerance
S	±40%	E12	±10%
N	±30%		
M	±20%	E24	±5%
K	±10%		
J	±5%	E96	±1%
H	±3%	E192	±0.5%
G	±2%		±0.25%
F	±1%		±0.1%
D	±0.5%		
C	±0.25%	Note: Non-standard ohmic values are available. Consult factory for minimum order quantities	
B	±0.1%		
A	±0.05%		
T	±0.01%		

Component Flammability					
Product Type	Polymer Type	IEC 695-2-2	UL94V Rating	Total Polymer Mass	Oxygen Index
Carbon Films					
CF18 (CFM14)	Epoxy	Meets Specification	N/A	3 mg	N/A
CF14 (CFM12)	Epoxy	Meets Specification	N/A	15 mg	N/A
CF12	Epoxy	Meets Specification	N/A	30 mg	N/A
Metal Films					
RNF18 (RNMF14)	Epoxy	Meets Specification	N/A	3 mg	N/A
RNF14 (RNMF12)	Epoxy	Meets Specification	N/A	15 mg	N/A
RNF12	Epoxy	Meets Specification	N/A	30 mg	N/A
Metal Oxides					
RSMF12	Silicone	Meets Specification	94V-0	20 mg	46 - 48%
RSMF1 (RSF12)	Silicone	Meets Specification	94V-0	30 mg	46 - 48%
RSMF2 (RSF1)	Silicone	Meets Specification	94V-0	50 mg	46 - 48%
RSMF3 (RSF2)	Silicone	Meets Specification	94V-0	130 mg	46 - 48%
RSMF5 (RSF3)	Silicone	Meets Specification	94V-0	500 mg	46 - 48%
RSF5	Silicone		94V-0	400 mg	46 - 48%
Chip Resistors					
RMCF Series	Boro-Silicated Acid Lead Glass	Meets Specification	94V-0	N/A	N/A
Chip Networks					
RACF Series	Boro-Silicated Acid Lead Glass	Meets Specification	94V-0	N/A	N/A
RAVF Series	Boro-Silicated Acid Lead Glass	Meets Specification	94V-0	N/A	N/A

Standard Color Codes

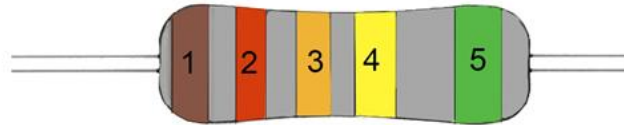

Standard Color Codes			
Band Color	Nominal	Multiplier	Tolerance (%)
Black	0	1	-
Brown	1	10	1
Red	2	100	2
Orange	3	1K	-
Yellow	4	10K	-
Green	5	100K	0.5
Blue	6	1,000K	0.25
Violet	7	-	-
Gray	8	-	-
White	9	0.001	-
Silver	-	0.01	10
Gold	-	0.1	5

Color Band Description		
Band	Precision	General Purpose
	Have three significant-figure bands, a multiplier band and a tolerance band. Tolerances 1% or less.	Have two significant-figure bands, a multiplier band and a tolerance band. Tolerances 2% or greater.
1st Band	Nominal	Nominal
2nd Band	Nominal	Nominal
3rd Band	Nominal	Multiplier
4th Band	Multiplier	Tolerance
5th Band	Tolerance	

Resistor Glossary	
Term	Definition
Ambient temperature	The ambient temperature is the temperature in the immediate environment of the resistor.
Carbon-composition	Resistor with the resistance element formed by molding a body of carbon powder mixed with a phenolic binder.
Carbon-film	Resistor whose resistance element is carbon film deposited on a ceramic core.
Climate category	Indicates the lowest and the highest ambient temperature at which the resistors may be operated continuously.
Color-band or color code	Method of indicating value and tolerance on axial leaded resistors whose body is too small for legible alphanumeric marking.
Critical resistance	The critical resistance (Rcrit) is the resistance that can be calculated from the rated dissipation Pv occurring under operating voltage Vmax. A resistor of critical resistance will exhibit the largest drift in a style, because it is the highest value that may carry the full rated power load.
Current noise	Random low frequency electrostatic noise arising from current fluctuations in parallel with the resistor.
Current sensor	A resistive device employed to sense levels of changes in current.
Derating	The power load capability of a resistor is limited by its permissible element temperature. Since the rated power dissipation is referenced to a specific ambient temperature, higher ambient temperatures require a reduced permissible load, i.e., a derating. The derating curve indicates the permissible power load as a function of the ambient temperature.
Dielectric strength (dielectric withstanding voltage)	The ultimate breakdown voltage of the dielectric or insulation of the resistor when the voltage is applied between the case and all terminals tied together. Dielectric strength is usually specified at sea level and simulated at high altitude air pressures.

Resistor Glossary (cont.)	
Term	Definition
DIP	Dual-in-line package resistor network.
E-series	Method of deriving nominal resistance values required for each tolerance level. The series E24 is comprised of 24 values per decade and applies to 2% and 5% tolerances. The series E96 applies to 1% tolerance and E192 applies to 0.1%, 0.25% and 0.5%.
Failure rate	The failure rate indicates the statistically established maximum rate of failures at a level of confidence of 60%. The figures are derived from certified results of standard endurance tests after 1000 hours duration at the rated dissipation.
Film temperature	The temperature of the resistive film is considered in discussions about power rating and pulse load capability. The film temperature determines the drift and stability of the resistor. For resistors that feature hot spots in the resistive film, the higher temperature of the hot spot is to be considered. Since most resistors are covered with lacquer or protective coating, only the surface temperature can be measured on the outside. However, the surface temperature is almost as high as the film temperature.
Fixed resistors	Resistors whose value is set in the manufacturing process.
Insulation resistance	The DC resistance measured between all terminals connected together and the case, exterior insulation, or external hardware.
Kelvin connection	Four-terminal connection required in low-resistance measurements to eliminate the effects of contact resistance and lead resistance, as well as the effects of lead temperature, providing accurate measurements. Invented by Lord Kelvin in the 19th Century.
Maximum working voltage	The maximum voltage stress (DC or rms) that may be applied to the resistor (resistance element). A function of the materials used, the required performance, and the physical dimensions.
Metal oxide	Resistor whose resistance element is a thick film ruthenium oxide paste deposited on a cylindrical ceramic core by means of dipping or spiral-coating.
Operating voltage	The limiting element voltage V_{max} is the maximum voltage that may be applied continuously to the resistor, provided its resistance value is equal to or higher than the critical resistance. The limit applies to DC voltages and to AC rms voltage of undistorted sinusoidal shape.
Power rating	Maximum power in still air that will limit the resistor internal hot-spot temperature to a satisfactory level. Power ratings must be reduced as the temperature rises, so derating curves or charts are published. These parameters are application-dependent.
Pulse load capability	The pulse load capability of a resistor is its ability to withstand transient loads that considerably exceed the rated dissipation with its peak value.
Resistance temperature characteristic (coefficient)	The magnitude of change in resistance due to temperature, expressed in percent or degree centigrade or parts-per-million per degree centigrade (PPM/C). If the resistance changes are linear over the specified temperature range, the parameter is known as the temperature "coefficient". This assumption of linearity is usually made in order to ease calculations.
Resistance tolerance	The permissible deviation of the manufactured resistance value (express in percent) from the specified nominal resistance value at standard or stated environmental conditions.
Resistor	A device that converts electrical energy to thermal energy according to Ohm's Law.
Shunt	A resistive device employed to divert most of the current in an electric circuit.
SIP	Single-in-line package resistor network.
SMD	Surface mount devices. Chips and chip arrays are examples.
Solderability	Property of the termination to accept new solder in a soldering process.
Stability	Ability of a resistor to maintain its initial resistance value of extended periods of time when subjected to any combination of electrical stresses and environmental conditions.
Temperature rise	Thermal resistance that impedes the dissipation of heat from the resistor.
Thick-film	Resistor whose resistance element consists of a ruthenium oxide (also called cermet) screen printed onto a ceramic substrate and fired at a high temperature.
Variable resistors	Resistors whose value can be adjusted (trimmed) by the user, typically by means of a dial.
Voltage coefficient	A resistor has a voltage coefficient if measurements of resistance with different voltages yield different results. The voltage coefficient is the quotient of the relative difference in resistance and the difference of measuring voltage.
Wirewound	Resistor whose resistance element consists of a wire (nickel-chromium, copper-nickel, or gold-platinum) wound around a bobbin or core.
Zero-ohm resistors	Jumpers that are manufactured into resistor bodies for ease of insertion by the user.

EIA Standard Resistor Values

Codes for fixed resistors

STANDARD RESISTANCE VALUES FOR THE 10 TO 100 DECADE

(also usable in decade multiples or sub-multiples)

Resistance Tolerance (%)																															
E192	E96	E24	E12	E6	E192	E96	E24	E12	E6	E192	E96	E24	E12	E6	E192	E96	E24	E12	E6	E192	E96	E24	E12	E6							
0.10%	0.25%	0.50%	1%	2%	5%	10%	20%	0.10%	0.25%	0.50%	1%	2%	5%	10%	20%	0.10%	0.25%	0.50%	1%	2%	5%	10%	20%	0.10%	0.25%	0.50%	1%	2%	5%	10%	20%
10.0	10.0	10	10	10	15.8	15.8	-	-	-	24.9	24.9	-	-	-	39.2	39.2	39	39	-	62.6	-	-	-	-	63.4	-	-	-	-	-	
10.1	-	-	-	-	16.0	-	16	-	-	25.2	-	-	-	-	39.7	-	-	-	-	63.4	63.4	-	-	-	-	-	-	-	-	-	
10.2	10.2	-	-	-	16.2	16.2	-	-	-	25.5	25.5	-	-	-	40.2	40.2	-	-	-	64.2	-	-	-	-	64.2	-	-	-	-	-	
10.4	-	-	-	-	16.4	-	-	-	-	25.8	-	-	-	-	40.7	-	-	-	-	64.9	64.9	-	-	-	64.9	64.9	-	-	-	-	
10.5	10.5	-	-	-	16.5	16.5	-	-	-	26.1	26.1	-	-	-	41.2	41.2	-	-	-	65.7	-	-	-	-	65.7	-	-	-	-	-	
10.6	-	-	-	-	16.7	-	-	-	-	26.4	-	-	-	-	41.7	-	-	-	-	66.5	66.5	-	-	-	66.5	66.5	-	-	-	-	
10.7	10.7	-	-	-	16.9	16.9	-	-	-	26.7	26.7	-	-	-	42.2	42.2	-	-	-	67.3	-	-	-	-	67.3	-	-	-	-	-	
10.9	-	-	-	-	17.2	-	-	-	-	27.1	-	27	27	-	42.7	-	-	-	-	68.1	68.1	68	68	68	68.1	68.1	68	68	68	68	
11.0	11.0	11	-	-	17.4	17.4	-	-	-	27.4	27.4	-	-	-	43.2	43.2	43	-	-	69.0	-	-	-	-	69.0	-	-	-	-	-	
11.1	-	-	-	-	17.6	-	-	-	-	27.7	-	-	-	-	43.7	-	-	-	-	69.8	69.8	-	-	-	69.8	69.8	-	-	-	-	
11.3	11.3	-	-	-	17.8	17.8	-	-	-	28.0	28.0	-	-	-	44.2	44.2	-	-	-	70.6	-	-	-	-	70.6	-	-	-	-	-	
11.4	-	-	-	-	18.0	-	18	18	-	28.4	-	-	-	-	44.8	-	-	-	-	71.5	71.5	-	-	-	71.5	71.5	-	-	-	-	
11.5	11.5	-	-	-	18.2	18.2	-	-	-	28.7	28.7	-	-	-	45.3	45.3	-	-	-	72.3	-	-	-	-	72.3	-	-	-	-	-	
11.7	-	-	-	-	18.4	-	-	-	-	29.1	-	-	-	-	45.9	-	-	-	-	73.2	73.2	-	-	-	73.2	73.2	-	-	-	-	
11.8	11.8	-	-	-	18.7	18.7	-	-	-	29.4	29.4	-	-	-	46.4	46.4	-	-	-	74.1	-	-	-	-	74.1	-	-	-	-	-	
12.0	-	12	12	-	18.9	-	-	-	-	29.8	-	-	-	-	47.0	-	47	47	47	75.0	75.0	75	-	75.0	75.0	75	-	-	-	-	
12.1	12.1	-	-	-	19.1	19.1	-	-	-	30.1	30.1	30	-	-	47.5	47.5	-	-	-	75.9	-	-	-	-	75.9	-	-	-	-	-	
12.3	-	-	-	-	19.3	-	-	-	-	30.5	-	-	-	-	48.1	-	-	-	-	76.8	76.8	-	-	-	76.8	76.8	-	-	-	-	
12.4	12.4	-	-	-	19.6	19.6	-	-	-	30.9	30.9	-	-	-	48.7	48.7	-	-	-	77.7	-	-	-	-	77.7	-	-	-	-	-	
12.6	-	-	-	-	19.8	-	-	-	-	31.2	-	-	-	-	49.3	-	-	-	-	78.7	78.7	-	-	-	78.7	78.7	-	-	-	-	
12.7	12.7	-	-	-	20.0	20.0	20	-	-	31.6	31.6	-	-	-	49.9	49.9	-	-	-	79.6	-	-	-	-	79.6	-	-	-	-	-	
12.9	-	-	-	-	20.3	-	-	-	-	32.0	-	-	-	-	50.5	-	-	-	-	80.6	80.6	-	-	-	80.6	80.6	-	-	-	-	
13.0	13.0	13	-	-	20.5	20.5	-	-	-	32.4	32.4	-	-	-	51.1	51.1	51	-	-	81.6	-	-	-	-	81.6	-	-	-	-	-	
13.2	-	-	-	-	20.8	-	-	-	-	32.8	-	-	-	-	51.7	-	-	-	-	82.5	82.5	82	82	-	82.5	82.5	82	82	-	-	
13.3	13.3	-	-	-	21.0	21.0	-	-	-	33.2	33.2	33	33	33	52.3	52.3	-	-	-	83.5	-	-	-	-	83.5	-	-	-	-	-	
13.5	-	-	-	-	21.3	-	-	-	-	33.6	-	-	-	-	53.0	-	-	-	-	84.5	84.5	-	-	-	84.5	84.5	-	-	-	-	
13.7	13.7	-	-	-	21.5	21.5	-	-	-	34.0	34.0	-	-	-	53.6	53.6	-	-	-	85.6	-	-	-	-	85.6	-	-	-	-	-	
13.8	-	-	-	-	21.8	-	-	-	-	34.4	-	-	-	-	54.2	-	-	-	-	86.6	86.6	-	-	-	86.6	86.6	-	-	-	-	
14.0	14.0	-	-	-	22.1	22.1	22	22	22	34.8	34.8	-	-	-	54.9	54.9	-	-	-	87.6	-	-	-	-	87.6	-	-	-	-	-	
14.2	-	-	-	-	22.3	-	-	-	-	35.2	-	-	-	-	55.6	-	-	-	-	88.7	88.7	-	-	-	88.7	88.7	-	-	-	-	
14.3	14.3	-	-	-	22.6	22.6	-	-	-	35.7	35.7	-	-	-	56.2	56.2	56	56	-	89.8	-	-	-	-	89.8	-	-	-	-	-	
14.5	-	-	-	-	22.9	-	-	-	-	36.1	-	36	-	-	56.9	-	-	-	-	90.9	90.9	91	-	90.9	90.9	91	-	-	-	-	
14.7	14.7	-	-	-	23.2	23.2	-	-	-	36.5	36.5	-	-	-	57.6	57.6	-	-	-	92.0	-	-	-	-	92.0	-	-	-	-	-	
14.9	-	-	-	-	23.4	-	-	-	-	37.0	-	-	-	-	58.3	-	-	-	-	93.1	93.1	-	-	-	93.1	93.1	-	-	-	-	
15.0	15.0	15	15	15	23.7	23.7	-	-	-	37.4	37.4	-	-	-	59.0	59.0	-	-	-	94.2	-	-	-	-	94.2	-	-	-	-	-	
15.2	-	-	-	-	24.0	-	24	-	-	37.9	-	-	-	-	59.7	-	-	-	-	95.3	95.3	-	-	-	95.3	95.3	-	-	-	-	
15.4	15.4	-	-	-	24.3	24.3	-	-	-	38.3	38.3	-	-	-	60.4	60.4	-	-	-	96.5	-	-	-	-	96.5	-	-	-	-	-	
15.6	-	-	-	-	24.6	-	-	-	-	38.8	-	-	-	-	61.2	-	-	-	-	97.6	97.6	-	-	-	97.6	97.6	-	-	-	-	
															61.9	61.9	62	-	-	98.8	-	-	-	-	98.8	-	-	-	-	-	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD category:](#)

Click to view products by [Stackpole manufacturer:](#)

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [CR-12JP4--680R](#) [CRCW04021K20FKEE](#) [CRCW04028R20JNEE](#) [CRCW06032K10FKEC](#)
[CRCW06036K80FKEE](#) [M55342K03B499DRS6](#) [M55342K06B6E19RWL](#) [M55342K09B5D62RS6](#) [M55342M06B26E7RS3](#) [742C083750JTR](#)
[MCR01MRTF1001](#) [MCR01MZPF1202](#) [MCR01MZPF1601](#) [MCR01MZPF1800](#) [MCR01MZPF6201](#) [MCR01MZPF9102](#) [MCR01MZPJ121](#)
[MCR01MZPJ125](#) [MCR01MZPJ751](#) [MCR03EZPJ103](#) [MCR03EZPF2004](#) [MCR03EZPJ270](#) [MCR03EZPJ821](#) [MCR10EZPF1102](#)
[MCR10EZPF2700](#) [MCR18EZPJ330](#) [RC1005F1152CS](#) [RC1005F1372CS](#) [RC1005F2052CS](#) [RC1005F471CS](#) [RC1005F4751CS](#)
[RC1005F5621CS](#) [RC1005F6041CS](#) [RC1005J121CS](#) [RC1005J122CS](#) [RC1005J180CS](#) [RC1005J181CS](#) [RC1005J202CS](#) [RC1005J391CS](#)
[RC1005J512CS](#) [RC1005J683CS](#) [RC1005J823CS](#) [RC1608F333CS](#) [RC1608F5110CS](#) [RC1608J121CS](#) [RC2012F2493CS](#) [RC2012F2740CS](#)
[RC2012J105CS](#)