



DIMENSIONS (mm)

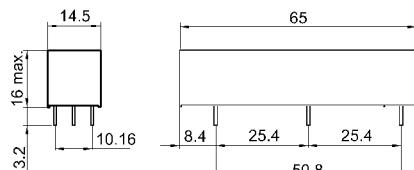

LAYOUT

pitch 2.54 mm/Top view



MARKING



PINS

Pins: Ø0.8 mm
 L = 3.2±0.3 mm
 Material: Cu-alloy tinned



MARKING

MEDER-Label
 Type/Layout
 Production code,
 EN60062/Factory code

| Coil Data at 20 °C | Conditions | Min | Typ | Max | Unit |
|--------------------|------------|-----|-----|-----|------|
| Coil resistance | | 234 | 260 | 286 | Ohm |
| Coil voltage | | | 12 | | VDC |
| Rated power | | | 554 | | mW |
| Inductance | | | 26 | | mH |
| Pull-In voltage | | | | 9 | VDC |
| Drop-Out voltage | | 1 | | | VDC |

| Contact data 83 | Conditions | Min | Typ | Max | Unit |
|---------------------------|--|-----|-----|-------|-------|
| Contact rating | Any DC combination of V & A not to exceed their individual max.'s | | | 50 | W |
| Switching voltage | DC or Peak AC | | | 7.500 | V |
| Switching current | DC or Peak AC | | | 3 | A |
| Carry current | DC or Peak AC | | | 5 | A |
| Contact resistance static | Measured with 40% overdrive Start Value | | | 150 | mOhm |
| Insulation resistance | RH <45 %, 100 V test voltage | 10 | | | TOhm |
| Breakdown voltage | according to EN 60255-5 | 10 | | | kV DC |
| Operate time incl. bounce | measured with 40% overdrive | | | 3,2 | ms |
| Release time | measured with no coil excitation | | | 1,5 | ms |
| Capacitance | @ 10 kHz across open switch | | 1 | | pF |

| Special Product Data | Conditions | Min | Typ | Max | Unit |
|------------------------------------|-------------------------------|-----|-------------------------|-----|-------|
| Number of contacts | | | 1 | | |
| Contact - form | | | A - NO | | |
| Dielectric Strength Coil/Contact | according to EN 60255-5 | 10 | | | kV DC |
| Insulation resistance Coil/Contact | RH <45%, 200 VDC test voltage | 1 | | | TOhm |
| Case colour | | | gray | | |
| Housing material | | | Polycarbonat | | |
| Sealing compound | | | Polyurethan | | |
| Connection pins | | | Copper alloy tin plated | | |



Products for
tomorrow...

Europe: +49 / 7731 8399 0 | Email: info@meder.com
USA: +1 / 508 295 0771 | Email: salesusa@meder.com
Asia: +852 / 2955 1682 | Email: salesasia@meder.com

Item No.:

8512183002

Item:

HE12-1A83-02

| Environmental data | Conditions | Min | Typ | Max | Unit |
|-----------------------|-----------------------------|--------------|-----|-----|------|
| Shock | 1/2 sine wave duration 11ms | | | 50 | g |
| Vibration | from 10 - 2000 Hz | | | 20 | g |
| Operating temperature | | -20 | | 70 | °C |
| Storage temperature | | -35 | | 105 | °C |
| Soldering temperature | wave soldering max. 5 sec. | | | 260 | °C |
| Washability | | fully sealed | | | |

Modifications in the sense of technical progress are reserved

Designed at: 10.02.03 Designed by: BUNKE Approval at: 27.01.11 Approval by: CRUF
Last Change at: 13.02.12 Last Change by: WKOVACS Approval at: 13.02.12 Approval by: CRUF Version: 05

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Reed Relays category:

Click to view products by Standexmeder manufacturer:

Other Similar products are found below :

[M2C24AH](#) [D1A05HD-3](#) [741A10](#) [8000-0211](#) [8000-0217](#) [836C2](#) [922A06C4C](#) [PRMA1A12C](#) [PRMA1A24B](#) [PRMA1A24C](#) [PRMA1B12C](#)
[PRMA1B24C](#) [PRMA1C05F](#) [PRMA2A24C](#) [R1C5DR](#) [R2A5D](#) [1220-0039](#) [RA30521051](#) [RA31232051](#) [HGS1005](#) [HGS1021](#) [HGS1048](#)
[HGS1088](#) [HGS2MT51111F00](#) [HGS2MT51111M00](#) [HGZM1C24](#) [HGZM2C05](#) [HGZM2C48](#) [DA1A24DWD](#) [DA1A-24V](#) [DA1C05FWD](#)
[DA1C12FW](#) [DA2A-6V](#) [134MPCX-3](#) [MRR1ADS8-12D](#) [MRR1ADS8-24D](#) [MRR1ADS8-5D](#) [MRR1ADSK-12D](#) [159-151-T00](#) [MSS62A05](#)
[MSS71A05](#) [MSS71A05B](#) [MSS71A12](#) [MSS71A24](#) [1804-105](#) [191TE1C2M-5S](#) [191TE2A1-5G](#) [191TE2A1-6G](#) [193RE4C3-24G](#) [HYR2001-](#)
[1520](#)