


Dimensions mm[inch]
 tolerances acc. to DIN ISO 2768-m
 Toleranzen gem. DIN ISO 2768-m

Isometric
 Scale 1:1
 Maßstab 1:1

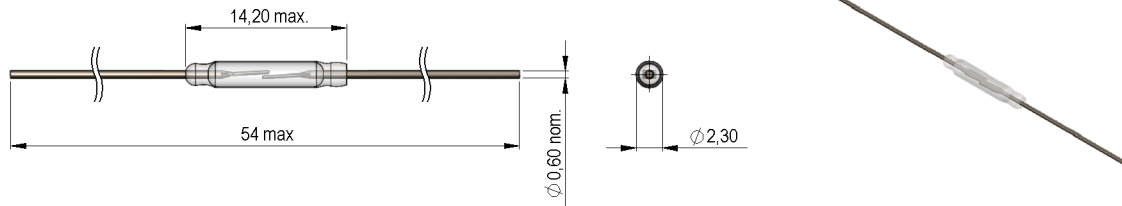

| Magnetic properties | Conditions | Min | Typ | Max | Unit |
|--------------------------------------|---|--------|-----|-----|------|
| Pull-In excitation (Reference value) | Reed switch unmodified measured in coil- "define operation" | 10 | | 15 | AT |
| Test equipment | Testing 100% | KMS-01 | | | |

| Contact data 05/5 | Conditions | Min | Typ | Max | Unit |
|---------------------------|---|-----------|-----|-----|------|
| Contact - No. | | 05/5 | | | |
| Contact-form | | A | | | |
| Contact-material | | PGM-alloy | | | |
| Contact rating | Any DC combination of V & A not to exceed their individual max.'s | | | 10 | W |
| Switching voltage | DC or Peak AC | | | 200 | V |
| Switching current | DC or Peak AC | | | 1 | A |
| Carry current | DC or Peak AC | | | 1,5 | A |
| Contact resistance static | Start value | | | 125 | mOhm |
| Insulation resistance | RH <45 %, 100 V test voltage | 10 | | | GOhm |
| Breakdown voltage | according to EN 60255-5 | 300 | | | VDC |
| Operate time incl. bounce | | | | 0,5 | ms |
| Release time | measured with no coil excitation | | | 0,1 | ms |
| Capacity | @ 10 kHz across open switch | | 0,2 | | pF |

| Special Product Data | Conditions | Min | Typ | Max | Unit |
|-------------------------|------------|-----|-----|-----|------|
| Reach / RoHS conformity | | yes | | | |

| Environmental data | Conditions | Min | Typ | Max | Unit |
|-----------------------|------------------------------------|-----|-----|-----|------|
| Shock | 1/2 sine, duration 11ms, in 3 axis | | | 100 | g |
| Vibration | from 10 - 2000 Hz | | | 50 | g |
| Operating temperature | | -40 | | 125 | °C |
| Storage temperature | | -50 | | 155 | °C |
| Soldering temperature | wave soldering max. 5 sec. | | | 260 | °C |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Standexmeder](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)