

REED SWITCH

ORD325

General purpose miniature-type

■ GENERAL DESCRIPTION


The ORD325 is a small single-contact reed switch designed for general control of medium-level loads less than 200V. The contacts are sealed within the glass tube with inert gas to maintain contact reliability.

■ FEATURES

- (1) Hermetically sealed within a glass tube with inert gas, reed contacts are not influenced by the external atmospheric environment.
- (2) Quick response
- (3) Comprising of operating parts and electrical parts arranged coaxially, reed switches are suited to high-frequency applications.
- (4) Compact and light weight.
- (5) Superior corrosion resistance and wear resistance of the contacts assures stable switching operation and long life.
- (6) Economically and easily becomes a proximity switch when paired with a magnet.

3

■ EXTERNAL DIMENSIONS (Unit: mm)

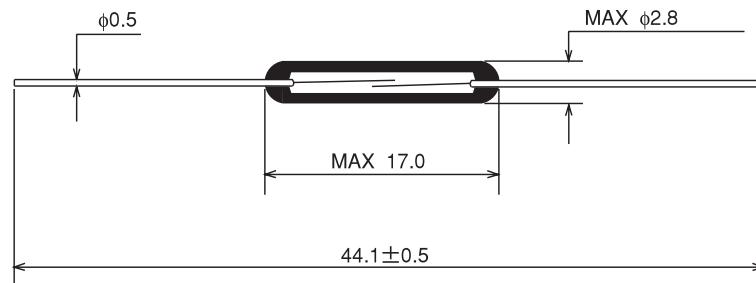

■ APPLICATIONS


- Control equipment
- Communication equipment
- Measurement equipment
- Household appliances

■ ELECTRICAL CHARACTERISTICS


Parameter	Rated Value	Unit
Pull-in Value (PI)	10~50	AT
Drop-out Value (DO)	4min	AT
Contact Resistance (CR)	100max	mΩ
Breakdown Voltage	300min (PI ≥ 15)	VDC
	250min (PI < 15)	VDC
Insulation Resistance	10 ¹⁰ min	Ω
Electrostatic Capacitance	0.3max	pF
Contact Rating	10	VA
Maximum Switching Voltage	200DC	V
	150AC	V
Maximum Switching Current	0.5	A
Maximum Carry Current	1.0	A

3


(1) Pull-in Value vs. Drop-out Value

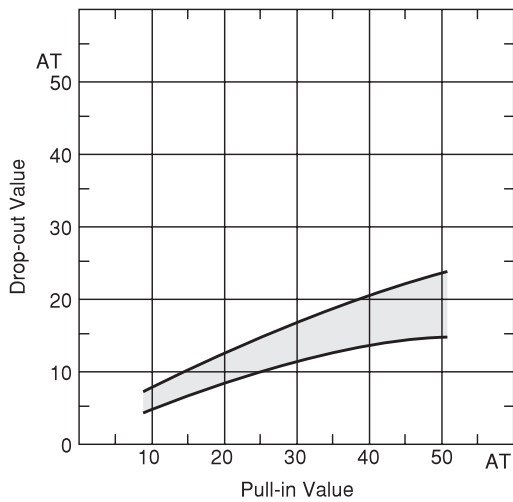


(2) Contact Resistance

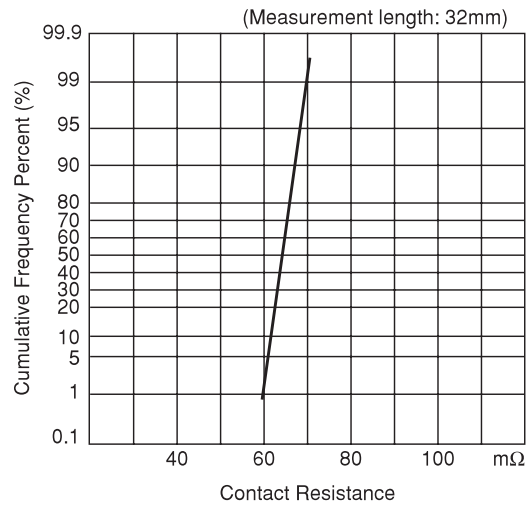

(3) Breakdown Voltage

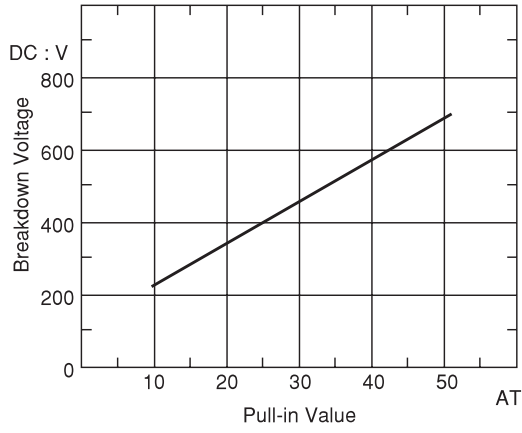


(4) Insulation Resistance

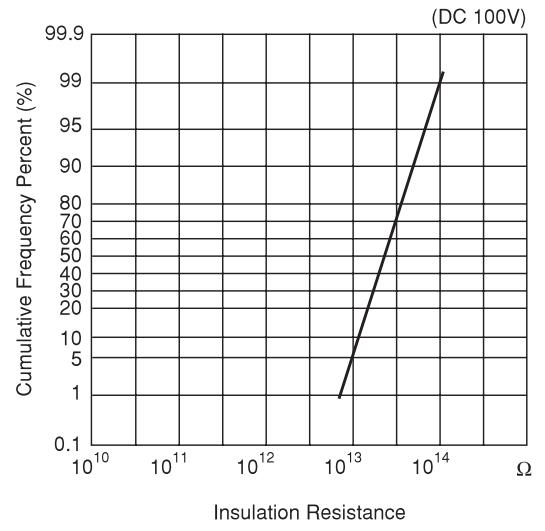

3


(5) Electrostatic Capacitance

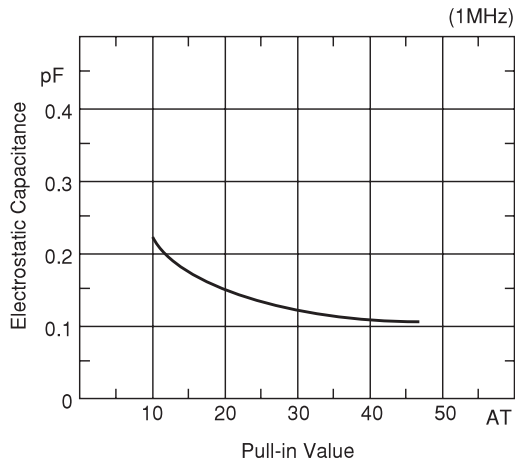


■ OPERATING CHARACTERISTICS

Parameter	Rated Value	Unit
Operate Time	0.4max	ms
Bounce Time	0.4max	ms
Release Time	0.05max	ms
Resonant Frequency	3700±300	Hz
Maximum Operating Frequency	500	Hz


(1) Operate Time

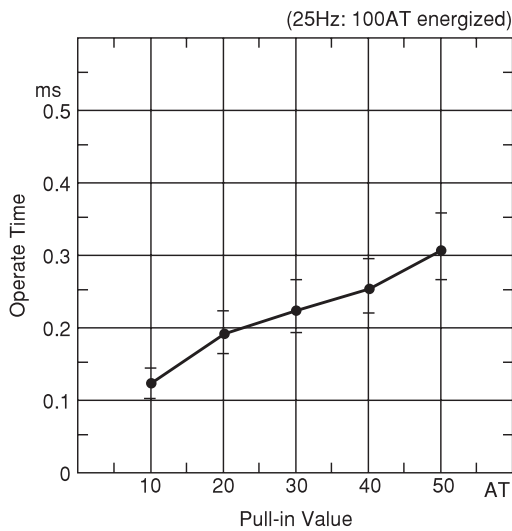


(2) Bounce Time

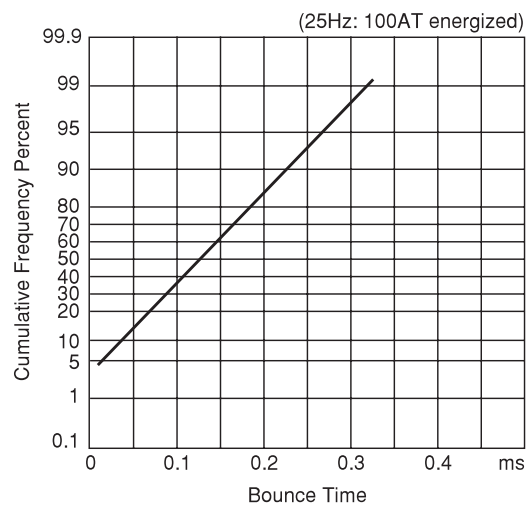

(3) Release Time

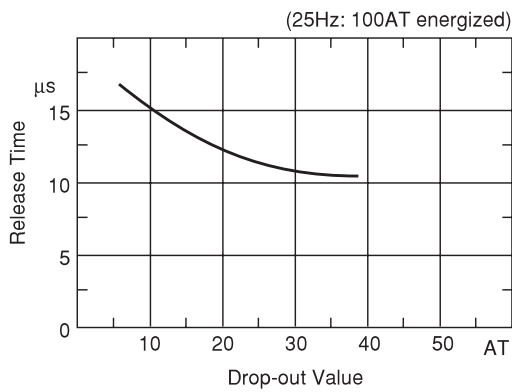


(4) Resonant Frequency

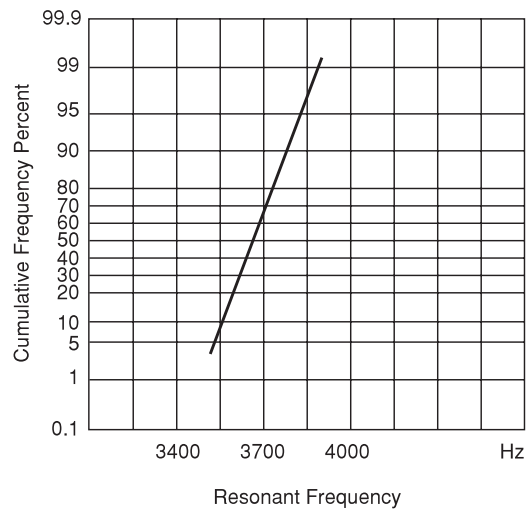


3

■ MECHANICAL CHARACTERISTICS

(1) Lead Tensile Test (Static Load)

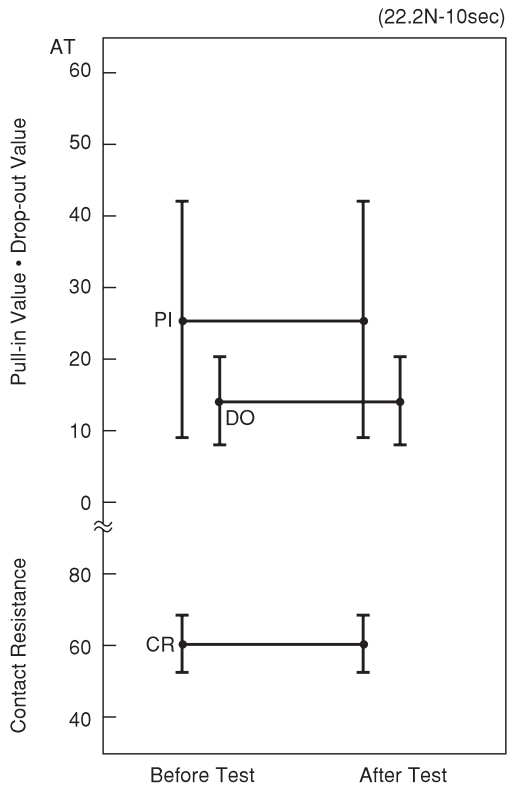


(2) Lead Tensile Strength

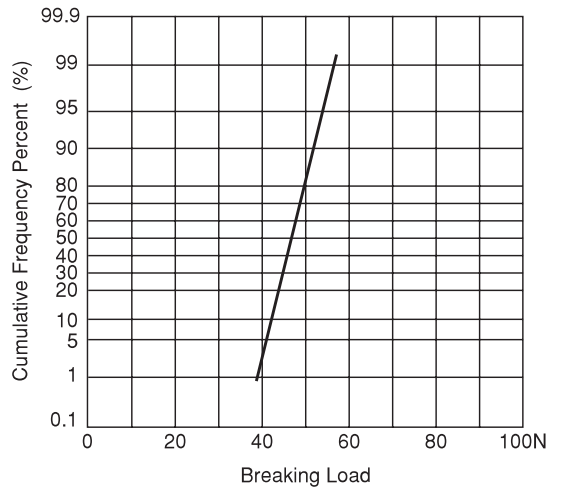


3

■ ENVIRONMENTAL CHARACTERISTICS


(1) Temperature Characteristics

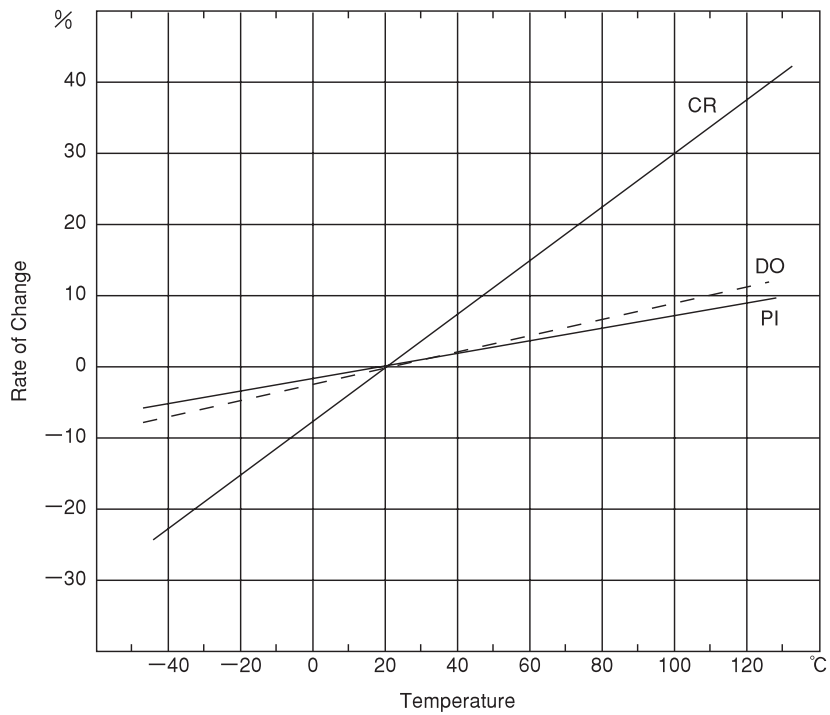


(2) Temperature Cycle

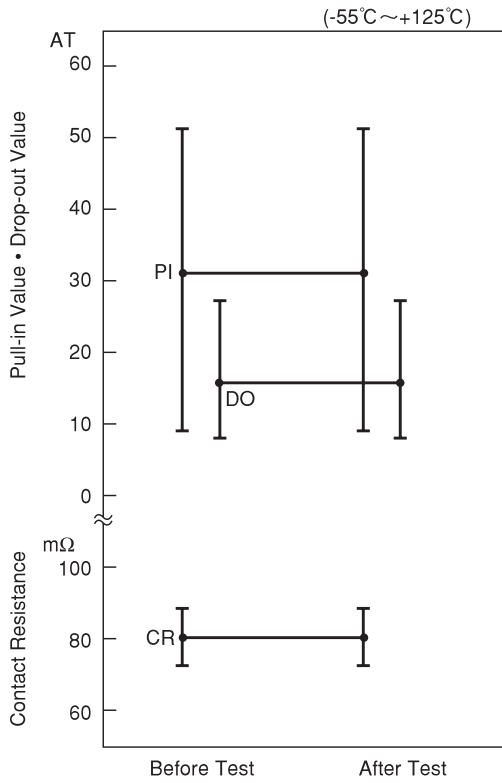


(3) Temperature and Humidity Cycle

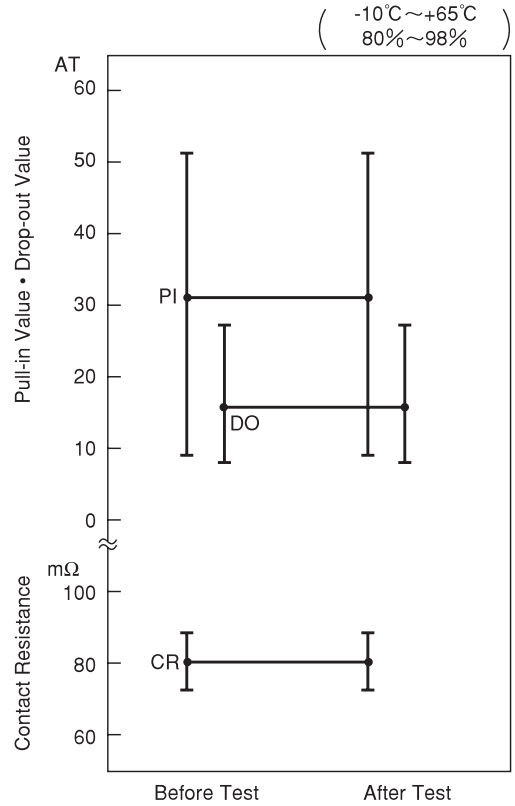

(4) High Temperature Storage Test

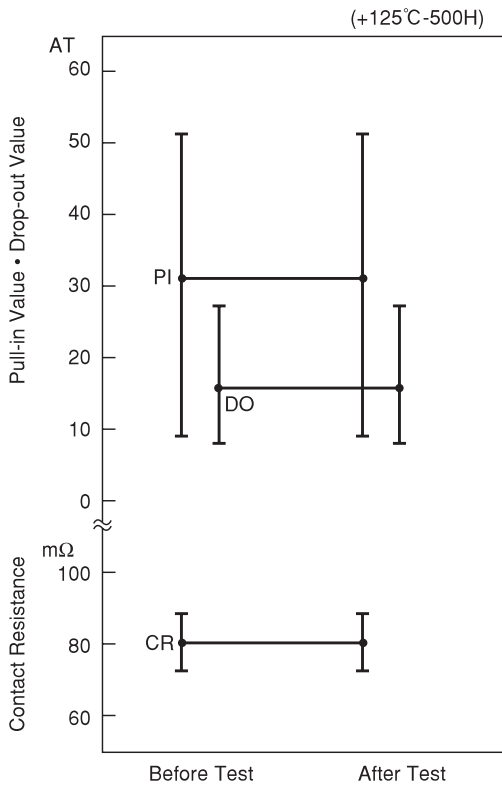


(5) Low Temperature Storage Test

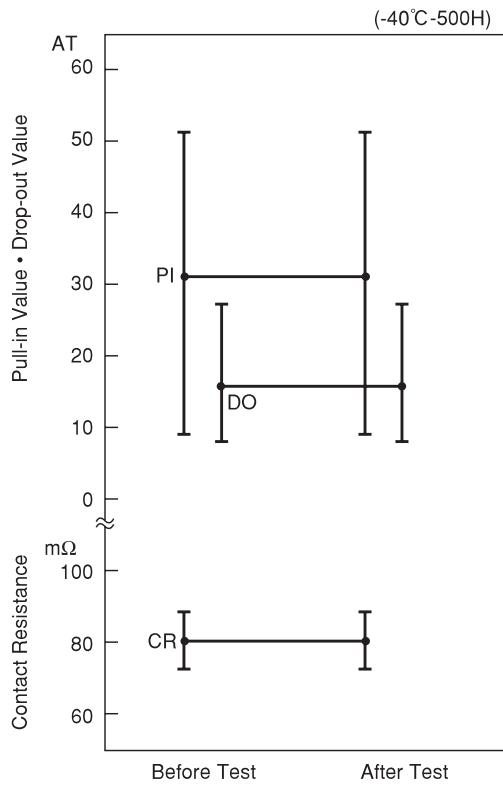


3

(6) Shock Test

1) Electrical Characteristics

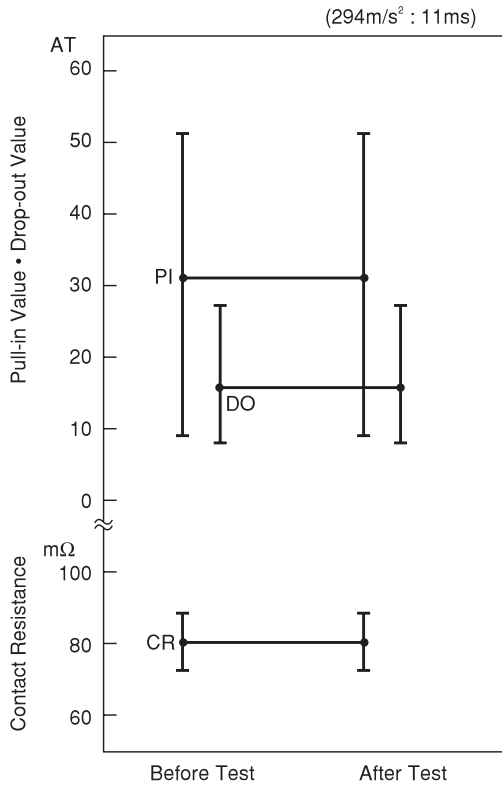


2) Misoperation Area

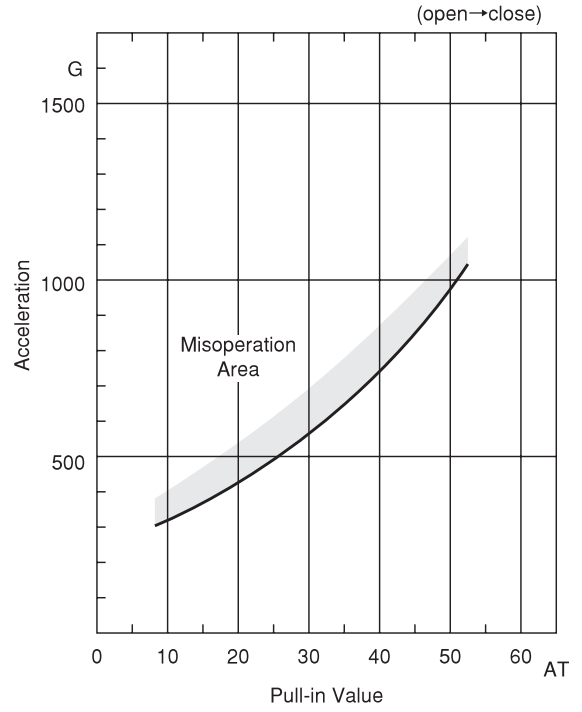


3

(7) Vibration Test

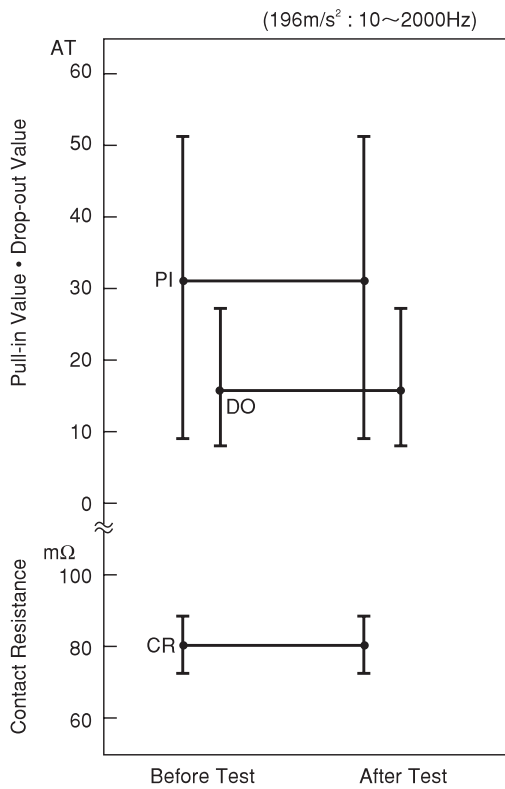


■ LIFE EXPECTANCY DATA: ORD325

Load Conditions
 Voltage: 5VDC
 Current: 1mA, 5mA, 10mA
 Load: Resistive Load

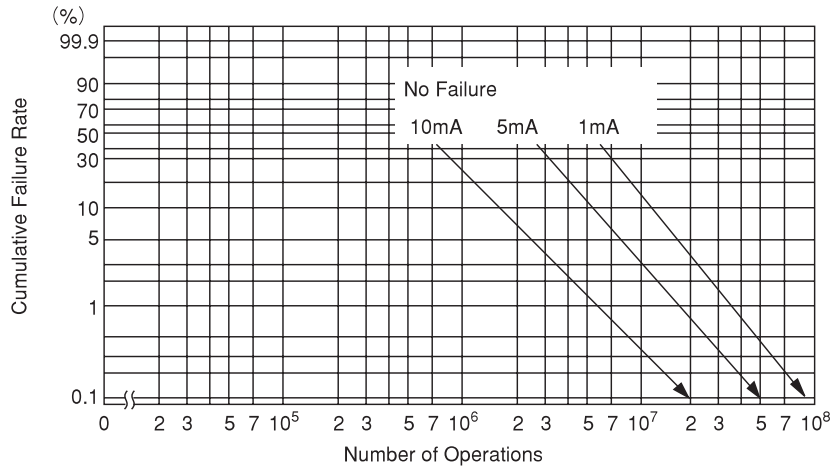


* Arrow indicates number of operations where test was completed.

Load Conditions
 Voltage: 12 VDC
 Current: 5mA, 10mA, 100mA
 Load: Resistive Load

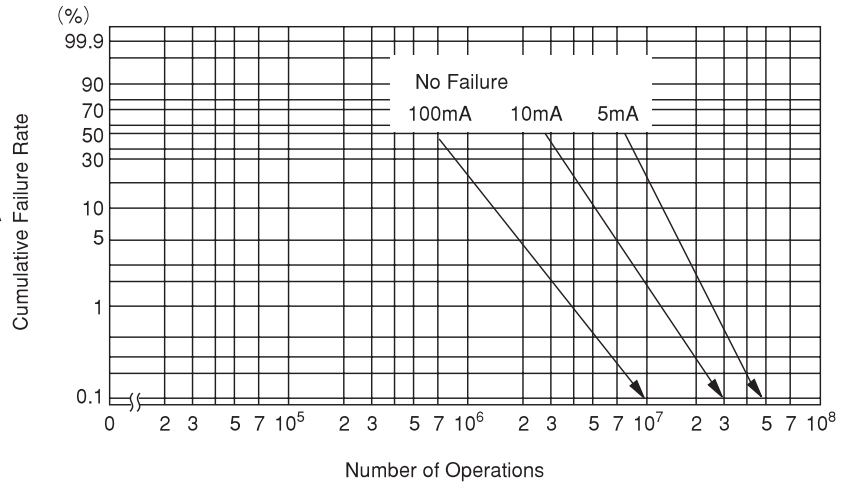

* Arrow indicates number of operations where test was completed.

Load Conditions
 Voltage: 24 VDC
 Current: 100mA, 200mA, 400mA
 Load: Resistive Load

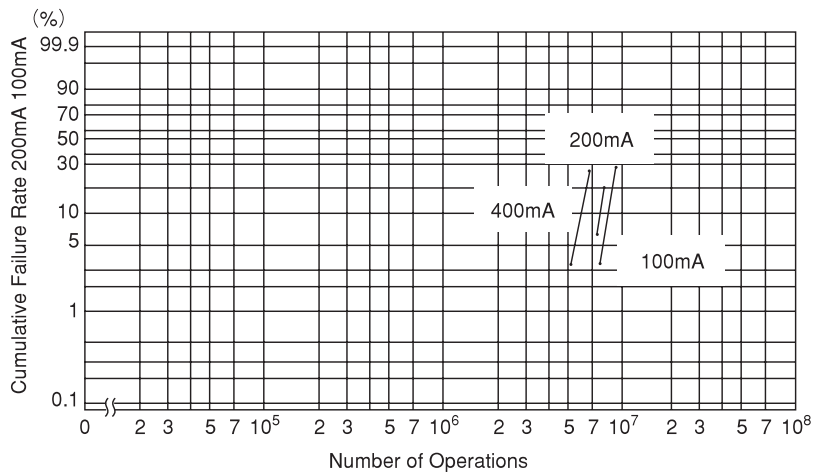

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Magnetic/Reed Switches](#) category:

Click to view products by [Standexmeder](#) manufacturer:

Other Similar products are found below :

[PSW-21](#) [AMS-20MG](#) [AMS-37-G_W/Brk](#) [AMS-38S-I](#) [AMS-38SW](#) [AMS-39B-B](#) [AMS-39B-W](#) [HRB10030](#) [2116900170](#) [AMS-10S-B](#) [AMS-25B-B](#) [AMS-37BROWN](#) [AMS-37L](#) [AMS-38MG](#) [AMS-38SB](#) [AMS-9-B](#) [AMS-T10C\(B\)](#) [4350238](#) [505-171W](#) [WHITE](#) [505-211B](#) [505-70B](#) [HM00-01800](#) [4350186](#) [505-101-GC](#) [505-101-GS](#) [505-101-WS](#) [505-392W](#) [505-90G](#) [505-90I](#) [507-381BB](#) [RSW-21A-I](#) [ODC-56B](#) [FF6-21-DC-03-SS](#) [FF6-11-AC-06](#) [FF6-21-AC-06](#) [AMS-10MGW](#) [AMS-37B](#) [GRAY](#) [HM00-01608LF](#) [HM00-04603LF](#) [HM00-02441BLFTR](#) [KSK-1A80/1-1015](#) [44531-0110](#) [44531-0200](#) [44531-0260](#) [35-756](#) [KSK-1A52-1520](#) [KSK-1C90U-1530](#) [KSK-1E85-BV470](#) [MLRR-4-22-28](#) [MLRR-3-42-48](#)