


LL4148/LL4448

SWITCHING DIODE

MINI MELF

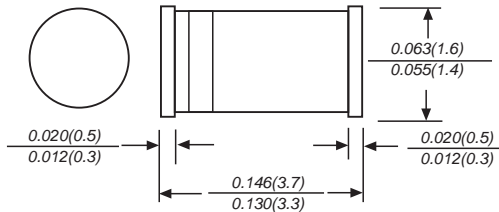

Dimensions in inches and (millimeters)

FEATURES

- ◆ Fast Switching Device (TRR <4.0 nS)
- ◆ Power Dissipation of 500mW
- ◆ High Stability and High Reliability
- ◆ Low reverse leakage

MECHANICAL DATA

Case: MINI MELF Glass Case
 Polarity: Color band denotes cathode end
 Mounting Position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum Ratings & Thermal Characteristics (Ratings at 25 ambient temperature unless otherwise specified.)



Parameters	Symbol	Value	Unit
Reverse Voltage	V_R	75	V
Peak Reverse Voltage	V_{RM}	100	V
Power Dissipation	P_d	500	mW
Operating junction temperature	T_j	175	
Storage temperature range	T_s	-65-+200	
Working Inverse Voltage	W_{IV}	75	V
Average Rectified Current	I_o	150	mA
Non-repetitive Peak Forward Current	I_{FM}	450	mA
Peak Forward Surge Current @tp=1s; TA=25	I_{FSM}	2.0	A

Valid provided that electrodes are kept at ambient temperature.

Electrical Characteristics (Ratings at 25 ambient temperature unless otherwise specified).


Symbols	Parameter	Test Condition	Limits		Unit
			Min	Max	
BV	Breakdown Voltage	$I_R=100\mu A$ $I_R=5\mu A$	100 75		V
IR	Reverse Leakage Current	$V_R=20V$ $V_R=75$	---	25 5	nA uA
VF	Forward Voltage	LL4448 LL4148 LL4448	$I_F=5mA$ $I_F=10mA$ $I_F=100mA$	0.62 --- 1 1	V
TRR	Reverse Recovery Time	$I_F=10mA, I_R=1.0mA$ $R_L=100\Omega$ $I_{RR}=1mA$	---	4	nS
C	Capacitance	$V_R=0V, f=1MHz$	---	4	pF

RATINGS AND CHARACTERISTIC CURVES LL4148/LL4448

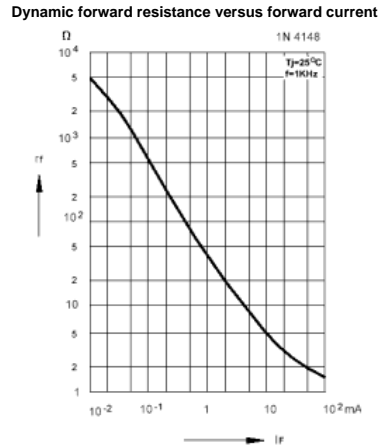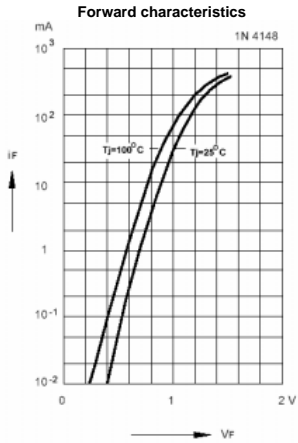


Admissible power dissipation versus ambient temperature


Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature

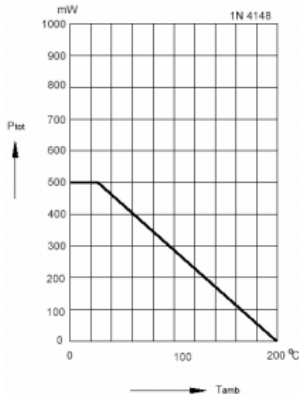

Relative capacitance versus reverse voltage

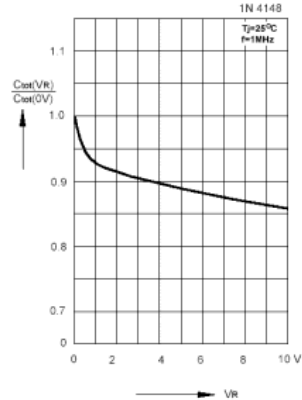


Leakage current versus junction temperature

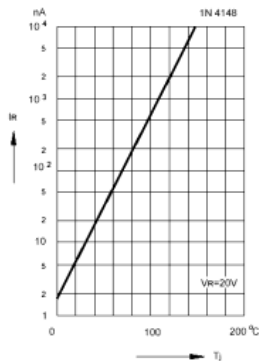

Admissible repetitive peak forward current versus pulse duration

Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature

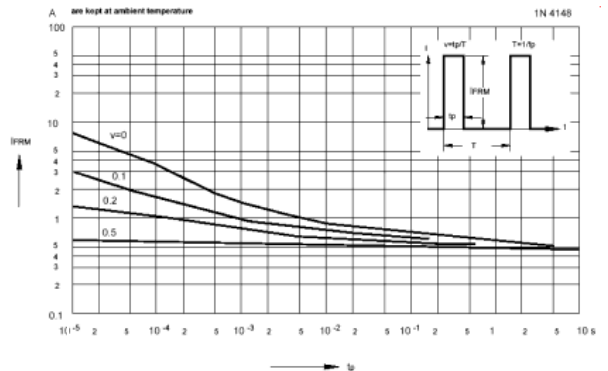

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [Starsea manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [DSE010-TR-E](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [FC903-TR-E](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#)
[1SS226-TP](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-](#)
[GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [BAV199E6433HTMA1](#) [BAS28-7](#)
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#) [NTE6250](#)
[NTE582-4](#) [NTE582-6](#) [MMDB30-E28X](#)