


SD103AWS-SD103CWS

SCHOTTKY DIODES

SOD-323



Dimensions in millimeters and (inches)

FEATURES

- ◆ Low forward voltage drop
- ◆ Guard ring construction for transient protection
- ◆ Negligible reverse recovery time
- ◆ low reverse capacitance

MECHANICAL DATA

Case: Molded plastic body

Terminals: Plated leads solderable per MIL-STD-750, Method 2026

Polarity: Polarity symbols marked on case

Mounting Position: Any

Marking: SD103AWS:S4, SD103BWS:S5, SD103CWS:S6

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum ratings and electrical characteristics, Single diode @T_A=25°C

PARAMETER	SYMBOLS	SD103AWS	SD103BWS	SD103CWS	UNITS
Peak repetitive peak reverse voltage	V _{RRM}				VOLTS
Working peak reverse voltage	V _{RMS}	40	30	20	
DC Blocking voltage	V _{DC}				
RMS Reverse voltage	V _{R(RMS)}	28	21	14	V
Forward continuous current	I _{FM}		350		mA
Repetitive peak forward current @t ≤ 1.0s	I _{FRM}		1.5		A
Power dissipation	P _d		200		mW
Thermal resistance junction to ambient	R _{θJA}		300		°C/W
Storage temperature	T _{STG}		-65 to +125		°C

Electrical ratings @T_A=25°C

PARAMETER	SYMBOLS	Min.	Typ.	Max.	Unit	Conditions
Reverse breakdown voltage	SD103AWS SD103BWS SD103CWS	40 30 20			V	IR=10uA IR=10uA IR=10uA
Forward voltage	V _F			0.37 0.60	V	I _F =20mA I _F =200mA
Reverse current	SD103AWS SD103BWS SD103CWS			5.0	uA	V _R =30V V _R =20V V _R =10V
Capacitance between terminals	C _T		50		pF	V _R =0V, f=1.0MHz
Reverse recovery time	t _{rr}		10		ns	I _F =I _R =200mA I _{rr} =0.1X I _R , R _L =100Ω

RATINGS AND CHARACTERISTIC CURVES SD103AWS-SD103CWS

FIG. 1- TYPICAL FORWARD CHARACTERISTICS


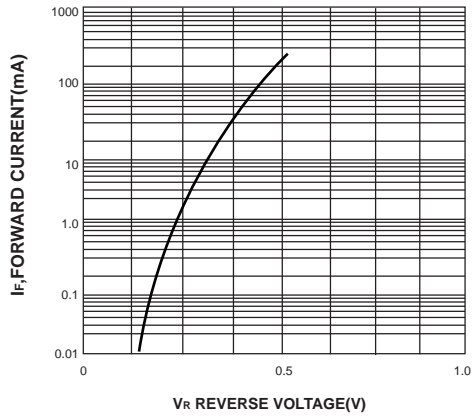


FIG. 2-TYP. JUNCTION CAPACITANCE VS REVERSE VOLTAGE

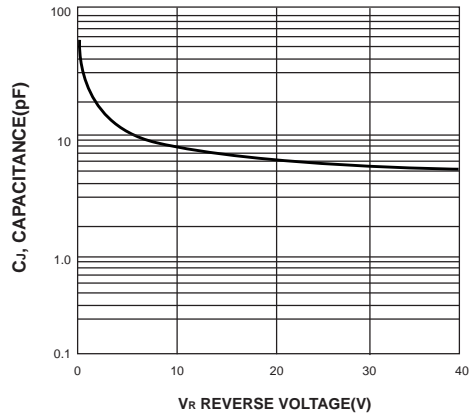

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Starsea](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#)
[SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#)
[MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [BAS 70-02L E6327](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK32A-](#)
[TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [BAT54-](#)
[13-F](#) [ACDBA340-HF](#) [ACDBA260LR-HF](#)