


XKF-414

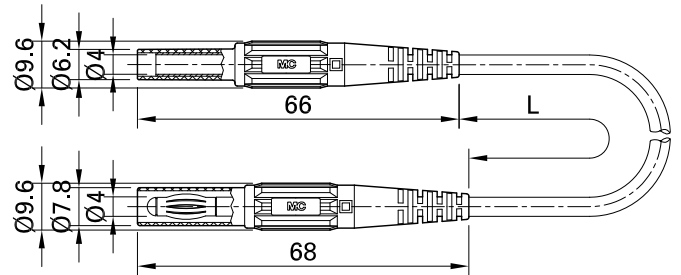

Data sheet XKF-414 08.2022

Item number 66.9011-*

Highly flexible, one end with Ø 4 mm MULTILAM plug with rigid insulating sleeve, the other end with Ø 4 mm rigid socket with rigid insulating sleeve.

Technical data	
Diameter of plug system	4 mm
Rated Values	1000 V, CAT III, 19 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color(s) *	21 22 23 24
Optional color(s)	25 26 27 29
Lead lengths <input type="text"/>	050; 100; 150; 200 cm
Lead insulation	PVC
Lead cross section	1,0 mm ²
Test accessory acc. to	IEC EN 61010-031
Approvals	UL, CE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [STAUBLI](#) manufacturer:

Other Similar products are found below :

[795-2384-10-25](#) [1301430020](#) [1510-24-105](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1927617](#) [2450](#) [2524-A-60](#) [924961-C](#)
[LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2524-A-48](#) [2977-J-48](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#)
[LB1F-2R-BLUE](#) [LB1F-2R-WHT](#) [6345](#) [6432](#) [6416](#) [973604100](#) [934160101](#) [934160100](#) [R948174000](#) [CT3269](#) [CT3158-100](#) [66.9407-05028](#)
[66.9407-10027](#) [MT5-LEADS](#) [1510-24-102](#) [924963](#) [EM3782-36-8#](#) [973604101](#) [933844001](#) [10-02414](#) [EM4970-24#](#) [R948170029](#)
[R948171029](#) [EMB-96-0](#) [BU-3030-M-24-9](#) [BU-3030-M-24-6](#) [BU-3030-M-24-4](#) [EMB-96-2](#) [R948151002](#) [R948321600](#) [R948320600](#)