


XZG410

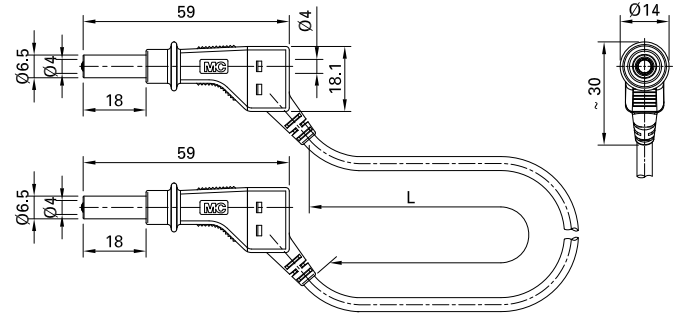

Item number 66.9405-*

Highly flexible, with stackable Ø 4 mm MULTILAM plugs on both ends with protective collar and retractable sleeve to prevent accidental touching. Especially suitable for connecting electrical devices not (yet) equipped with safety sockets.

| Technical data | |
|--------------------------------------|--|
| Diameter of plug system | 4 mm |
| Rated Values | 600 V, CAT II, 19 A |
| Surface treatment electrical contact | Ni |
| Base material electrical contact | CuZn |
| Standard color(s) * | 21 22 23 |
| Optional color(s) | 20 24 25 26 27 28 29 |
| Lead lengths <input type="text"/> | 050; 100; 150; 200 cm |
| Lead insulation | PVC |
| Lead cross section | 1,0 mm ² |
| Test accessory acc. to | IEC EN 61010-031 |
| User-Information | I 073 |
| Remarks | Other color and/or length combinations available on request. |
| Approvals | CE |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [STAUBLI](#) manufacturer:

Other Similar products are found below :

[614187](#) [668571](#) [795-2384-10-25](#) [855705](#) [1301430020](#) [1510-24-105](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1888177](#) [1888358](#)
[1894586](#) [1894676](#) [1894810](#) [1895013](#) [1895051](#) [1895097](#) [1895114](#) [1895138](#) [1895177](#) [1895263](#) [1895288](#) [1895320](#) [1895484](#) [1895504](#)
[1895528](#) [1895596](#) [1895632](#) [1895644](#) [1908984](#) [1909524](#) [1911623](#) [1919532](#) [1922532](#) [1922571](#) [1923162](#) [1923196](#) [1927617](#) [2450](#) [2524-A-60](#)
[2530650](#) [911433](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [3045646](#) [1632463](#) [1888570](#) [1888581](#) [1894455](#) [1894629](#)