


Test accessories HF Main catalog

HFlite | Test & Measurement

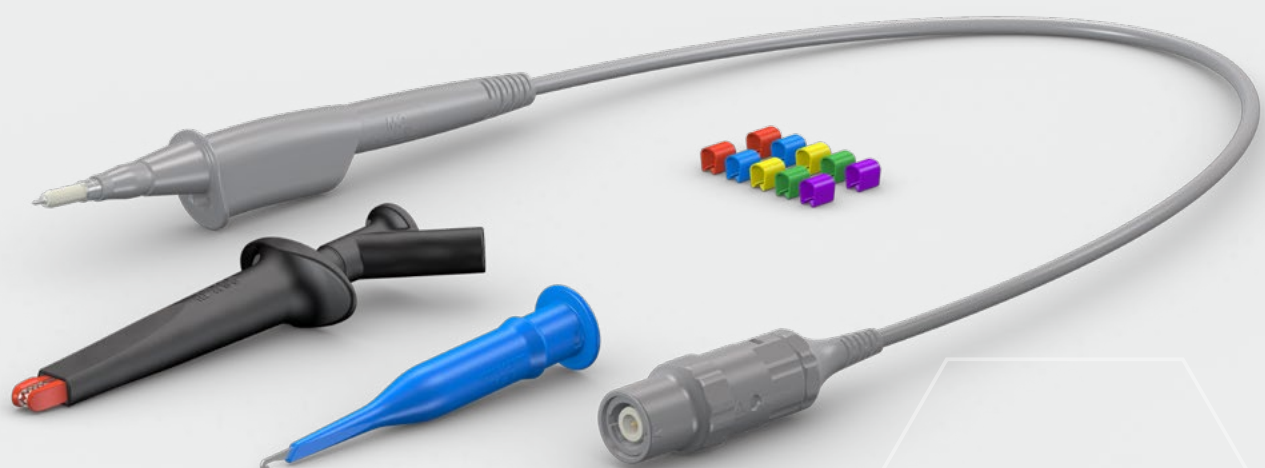

STÄUBLI ELECTRICAL CONNECTORS


Long-term solutions – Expert connections



Stäubli Electrical Connectors is a leading international manufacturer of high-quality electrical connector systems. We are part of the Stäubli Group which offers mechatronics solutions for electrical connectors, liquid and gas couplings, robots and textile machinery.

Stäubli develops, produces, sells and maintains products for markets with high productivity standards. As recognized specialists, our focus is always on solutions and customers. Many new developments got their start here and have begun to make their way around the world.

Businesses and customers count on our commitment and our active support when dealing with unusual problems. With us, you are entering into a long-term partnership built on reliability, dynamism, and exceptional quality in both products and services.

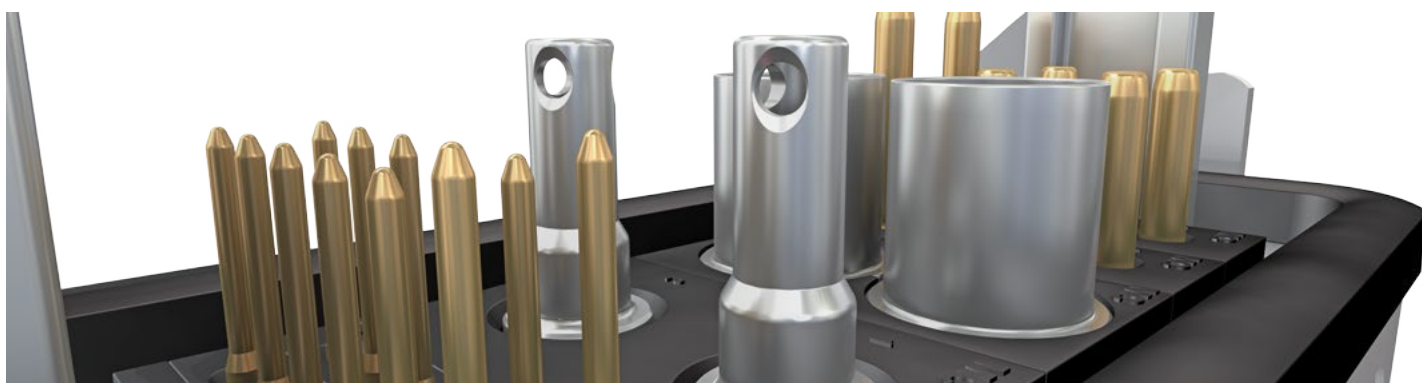

Applications and advantages



This product range includes passive high-frequency test probes (HF probes) and accessories as well as touch-protected BNC plug connectors, leads, adapters and converters.

Our test probes are suitable for use in CAT III- and CAT IV environments (Measurement Categories), such as the analysis of house and building installations with mains analysis/mains monitoring devices. The use of a coaxial connecting cable with a particularly

low capacitance, together with modifications in the interior of the probe, results in a further improvement in the electrical characteristics (e.g. a lower input capacity) compared with the tried and tested Isoprobe II generation of probes.

Contents

| | | | |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------------|
| Page 5 | Ordering Information | Page 41 | BNC Safety Test Leads |
| Page 6 | Isoprobe IV <ul style="list-style-type: none">■ Probe■ Probe Set■ Accessories | Page 45 | Touch-protected BNC Connectors and BNC Panel-mount Sockets |
| Page 12 | Isoprobe II <ul style="list-style-type: none">■ Probe■ Probe Set | Page 51 | BNC / Ø 4 mm Adapters and Adapter Leads |
| Page 24 | Isoprobe III <ul style="list-style-type: none">■ Probe■ Probe Set | Page 56 | BNC / Ø 2 mm Adapters and Adapter Leads |
| Page 34 | Isoprobe III-HP <ul style="list-style-type: none">■ Probe■ Probe Set■ Accessories Isoprobe II and Isoprobe III | Page 57 | BNC Lead Couplers |
| | | Page 58 | BNC Signal Distributors |
| | | Page 59 | Touch-protected Adapters and Converters |
| | | Page 65 | Technical Information |
| | | Page 70 | Index |

Ordering Information

Technical modifications and information given in the catalogue

We have a policy of continuous improvement and reserve the right to make technical modifications to any product in accordance with any safety and technical developments. We accept no responsibility for the accuracy of the information given in the catalogue.

Order code

When ordering, always state the order number of the article in addition to the type designation. For articles that are available in more than one colour or lead length, write the desired lengths and colour codes after the order number instead of the spaces and * used in the catalogue.

Example: The catalogue offers the following:

BNC Safety Test Lead XLSS-58,

Order No. 67.9770-*,

Lengths: 050 100 150 200 cm,

Colours: 21 22 23

For a lead with a length of 150 cm in red, your order should read as follows:

BNC Safety Test Lead XLSS-58, 150 cm, red, Order No. 67.9770-15022

Lead length

The lead length of all standard leads in this catalogue refers to the visible length of the cable.

Colour Variations

Due to the use of high-grade types of insulating materials, despite having the same colour code some of our articles may exhibit certain differences in colour (e.g. a silicone-insulated lead fitted with TPE-insulated plugs).

Delivery Time

Many products are available ex-stock. Additional assembly time may be required for those items not ex-stock. Delivery times are available on request.

Small Orders

We request that small value orders are placed with one of our distributors.

Standard and Special Designs

This catalogue details those assembled leads which are most commonly requested. We can of course manufacture to specific requests and are happy to quote for special designs. In addition, please contact us with regards to any special requirements such as alternative surface treatments.

Copyright

The use of this catalogue for any other purpose, in whatever form, without our prior written consent is not permitted.

RoHS ready

EU directive 2011/65/EC restricts the use of certain hazardous substances in electrical and electronic equipment (RoHS conformity). Although this directive is not yet applicable to electrical test accessories, for all articles presented in this catalogue we use only materials that would conform to the RoHS criteria.

Colour code

| | | | |
|-------------------------|--------------|-------------------------|-------------|
| <input type="text"/> 20 | green-yellow | <input type="text"/> 26 | violet |
| <input type="text"/> 21 | black | <input type="text"/> 27 | brown |
| <input type="text"/> 22 | red | <input type="text"/> 28 | grey |
| <input type="text"/> 23 | blue | <input type="text"/> 29 | white |
| <input type="text"/> 24 | yellow | <input type="text"/> 33 | transparent |
| <input type="text"/> 25 | green | | |

Surface treatment

| | |
|--------------------------|------------------|
| <input type="text"/> Ag | silver-plated |
| <input type="text"/> Au | gold-plated |
| <input type="text"/> Ni | nickel-plated |
| <input type="text"/> Opt | Optalloy®-finish |

Lead insulation

| | |
|--------------------------|-----|
| <input type="text"/> PVC | PVC |
| <input type="text"/> TPE | TPE |
| <input type="text"/> SIL | SIL |

Lead insulation

| | |
|--------------------------------|-------------|
| <input type="text"/> CE | CE conform |
| <input type="text"/> UL LISTED | UL approval |
| <input type="text"/> UL | UL approval |


Isoprobe IV

Oscilloscope probes in compact design

The new Isoprobe IV generation of passive probes is a highly compact addition to the Stäubli range of touch-protected high-frequency probes. The greatly reduced size of this new product substantially facilitates the conduct of measurements in a restricted space, while still retaining the good electron-

ic characteristics of Stäubli Isoprobe test probes. Despite their compact construction and correspondingly smaller clearances and creepage distances, the Isoprobe IV probes have a high touch protection rating of CAT III at 300 V. The Isoprobe IV generation is particularly suited for electronics engineers,

while the probes of the Isoprobe II and Isoprobe III series are designed primarily for electricians. The Isoprobe IV models are available as 10:1 and 100:1-divider probes.

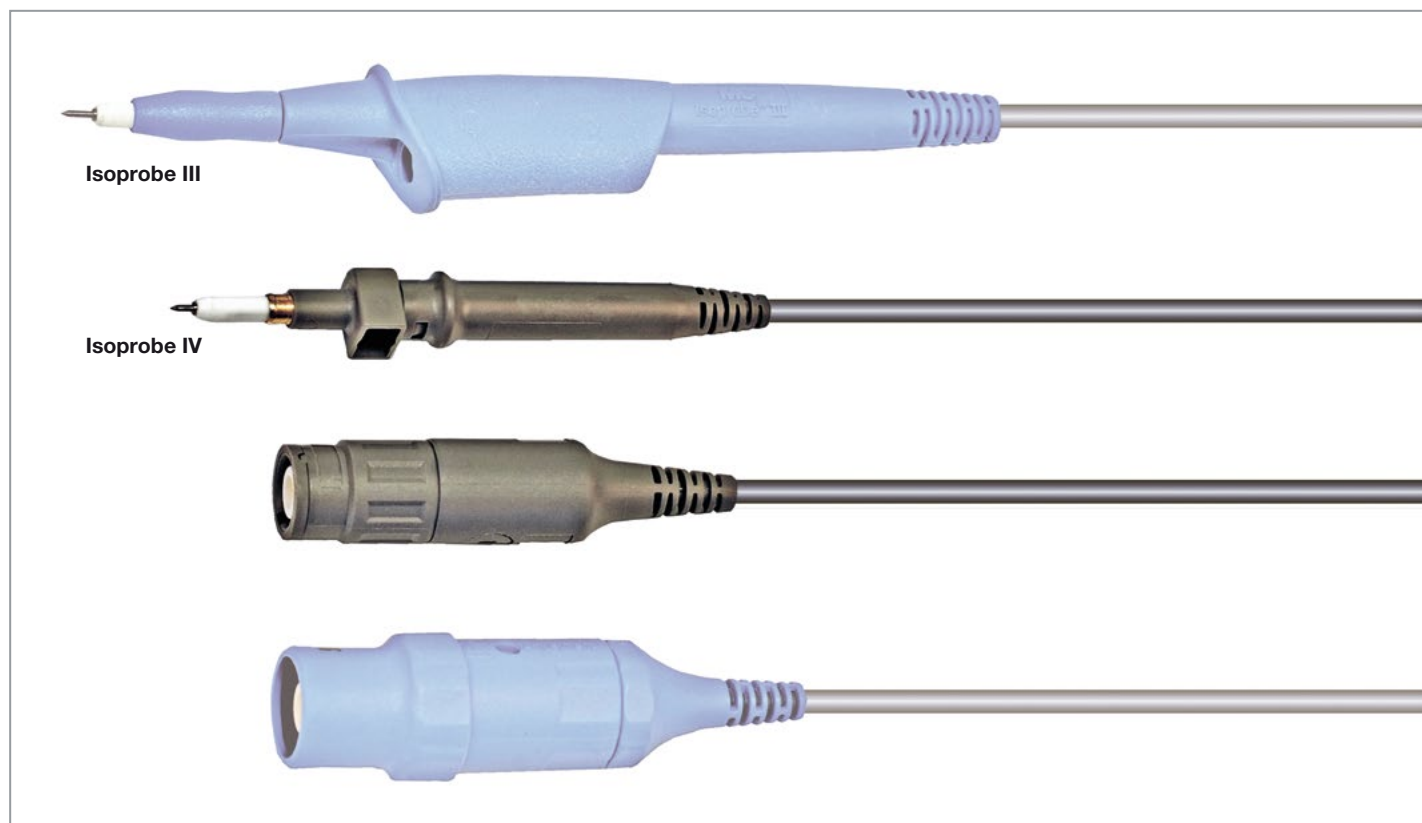

For comparison:

Compact Isoprobe IV beside a probe of the existing Isoprobe III series.



Isoprobe IV are available singly or in a set with accessories specially adapted to the new probes.



Contents of the Sets:

- 1. Oscilloscope probe Isoprobe IV- 10:1 or Isoprobe IV- 100:1
- 2. Push-on hook clip HC400
- 3. Push-on BNC adapter BA400

- 4. Push-on reference contact GS400
- 5. Reference lead with crocodile clip GM400
- 6. Set of colour clips SCC
- 7. Protective cap

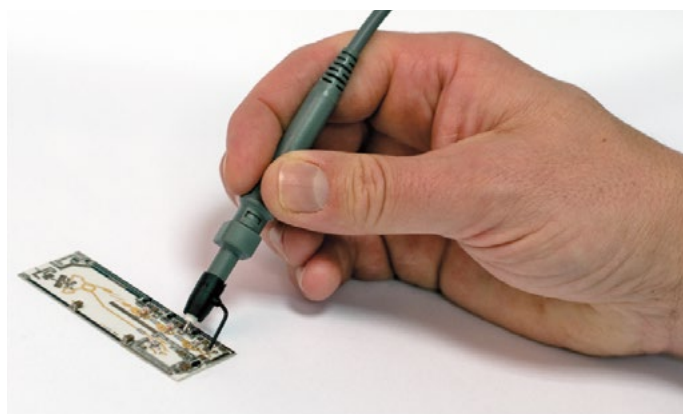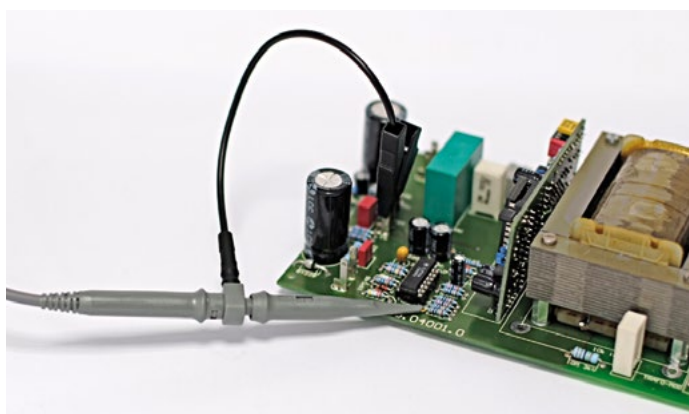


Oscilloscope probes in compact design

Isoprobe IV – 10:1

Safety high-frequency 10:1 test probe of compact design. With wide frequency range combined with low input capacitance. Highly flexible PVC-insulated coaxial connecting

lead with BNC plug with integrated compensation unit. Facility for connecting reference lead in the front part of the probe.

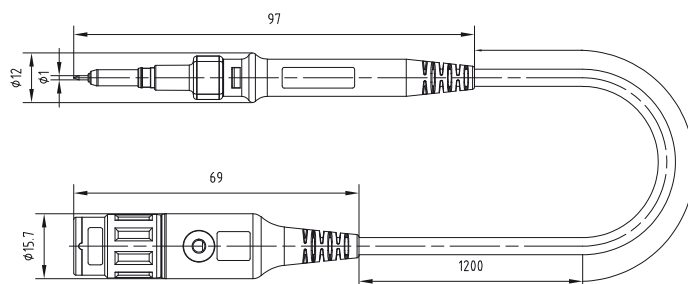

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|--------------------|--------|------------------|--------|
| 68.9366-12028 | Isoprobe IV - 10:1 | PVC CE | 120 | 28 |

| Technical Data | | |
|-------------------------------------|-------------------------|-----------------------------|
| | Shield / earth | Probe tip / shield |
| Rated voltage (frequency-dependent) | Max. 300 V, CAT III | Max. 300 V _{r.m.s} |
| | | |
| Dividing ratio | 10:1 | |
| Input capacitance | 11 pF | |
| Compensation range (works setting) | 10 pF ... 25 pF (15 pF) | |
| Input resistance | 10 MΩ | |
| Frequency range | 0 ... 500 MHz | |
| Rise time | 0.9 ns | |
| Lead length | 120 cm | |



RZ Sheet RZ103


www.staubli.com/electrical

Isoprobe IV – 100:1

Safety high-frequency 100:1 test prob of compact design. As a result of its low input capacitance and high input resistance, the

probe is ideally suited for measurements on sensitive circuits. Highly flexible PVC-insulated coaxial connecting lead with BNC

plug with integrated compensation unit. Facility for connecting reference lead in the front part of the probe.

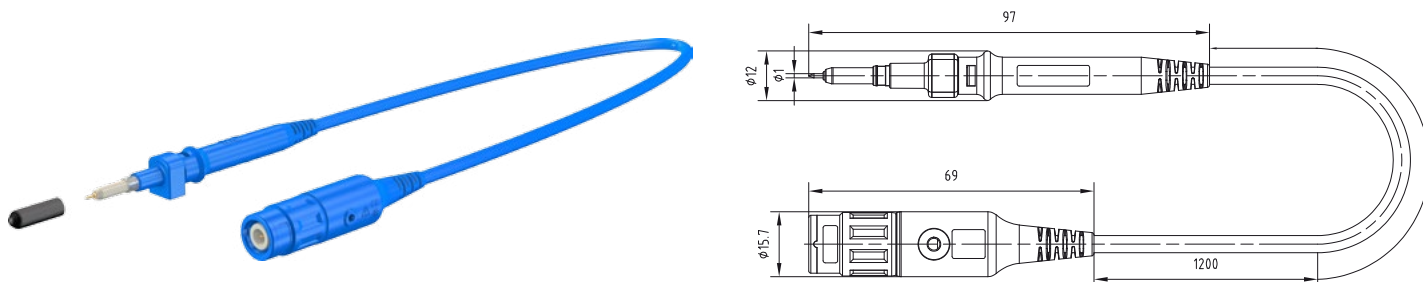

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|---------------------|--------|------------------|--------|
| 68.9367-12023 | Isoprobe IV – 100:1 | PVC CE | 120 | 23 |

| Technical Data | | |
|-------------------------------------|-------------------------|-----------------------------|
| | Shield / earth | Probe tip / shield |
| Rated voltage (frequency-dependent) | Max. 300 V, CAT III | Max. 300 V _{r.m.s} |
| | | |
| Dividing ratio | 100:1 | |
| Input capacitance | 4.6 pF | |
| Compensation range (works setting) | 10 pF ... 25 pF (15 pF) | |
| Input resistance | 100 MΩ | |
| Frequency range | 0 ... 500 MHz | |
| Rise time | 0.9 ns | |
| Lead length | 120 cm | |



RZ Sheet RZ104

www.staubli.com/electrical

SET Isoprobe IV – 10:1 SET Isoprobe IV – 100:1

The sets Isoprobe IV - 10:1 / 100:1 contain accessories to meet the needs of a professionally equipped electronics technician.



| Order No. | Type | Rated voltage | | Colour |
|------------|-------------------------|---------------------|-------------|--------|
| 68.9433-28 | SET Isoprobe IV – 10:1 | Max. 300 V, CAT III | CE ⚠ RZ 103 | 28 |
| 68.9434-23 | SET Isoprobe IV – 100:1 | Max. 300 V, CAT III | CE ⚠ RZ 104 | 23 |

Supplied components

| | | | |
|--------------------------------------|--|------------------|--|
| Isoprobe IV – 10:1/100:1 Page 8/9 | | | |
| HC400 Page 11 | | GM400 Page 11 | |
| GS400 Page 11 | | BA400 Page 11 | |
| SCC Page 40 | | | |




RZ Sheet RZ103, RZ104

www.staubli.com/electrical

Isoprobe IV – Accessories

HC400


Push-on hook clip.



| Order No. | Type | Rated voltage | | *Colours |
|-----------|-------|-----------------------------------|----|----------|
| 68.9369-* | HC400 | 600 V, CAT II (300 V, CAT III) | CE | 23 28 |

GS400

Push-on reference contact.




| Order No. | Type | Rated voltage | | Colour |
|------------|-------|----------------------------------------|-----------------------------|--------|
| 68.9443-21 | GS400 | 30 V _{AC} /60 V _{DC} | CE cUL _{US} LISTED | 21 |

GM400

Highly flexible reference lead with insulation in silicone. One end with fork-type plug for connecting to the shielded contact on the


side of the probe, other end with crocodile clip with allround insulation and toothed gripping jaws with fine-wire clamping surface.

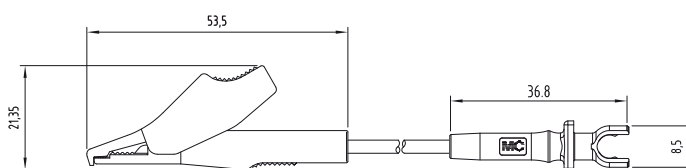

| Order No. | Type | Rated voltage | Lead cross section | | Lead length [cm] | Colour |
|---------------|-------|-----------------------------------|----------------------|--------|------------------|--------|
| 68.9444-01521 | GM400 | 600 V, CAT II (300 V, CAT III) | 0.50 mm ² | SIL CE | 015 | 21 |

BA400

Uninsulated push-on BNC adapter.




| Order No. | Type |
|-----------|-------|
| 68.9376 | BA400 |

Touch-protected Passive Oscilloscope Probes Isoprobe II and Probe Sets

Isoprobe II – 1:1

Safety high-frequency test probe with highly flexible PVC-insulated coaxial connecting lead with BNC plug. Ø 2 mm safety socket for reference lead connection in the handling part.

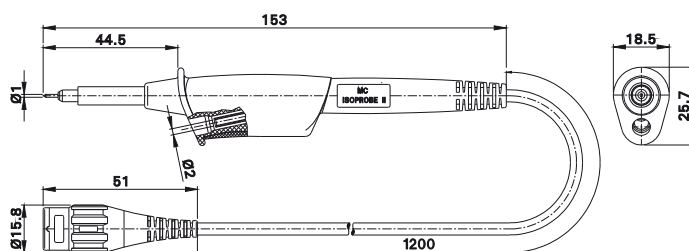

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|-------------------|-------------------|------------------|--------|
| 68.9870-12021 | Isoprobe II – 1:1 | PVC CE cUL LISTED | 120 | 21 |

| Technical Data | | |
|-------------------------------------|---------------------------------------------------|--|
| Rated voltage (frequency-dependent) | Max. 300 V, CAT III | |
| Dividing ratio | 1:1 | |
| Input capacitance | Input capacitance of measuring instrument + 42 pF | |
| Input resistance | Input resistance of measuring instrument | |
| Frequency range | 0 ... 45 MHz | |
| Rise time | Rise time of measuring instrument + 6 ns | |
| Lead length | 120 cm | |





RZ Sheet RZ041

www.staubli.com/electrical




SET Isoprobe II – 1:1


Test probe set, consisting of safety high-frequency test probe Isoprobe II - 1:1 and accessories.



| Order No. | Type | Rated voltage | | Colour |
|------------|-----------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 68.9490-21 | SET Isoprobe II - 1:1 | Max. 300 V, CAT III |   | 21 |

Supplied components

| | |
|------------------------------|-------------------------------------------------------------------------------------|
| Isoprobe II – 1:1 Page 12 |  |
| HC200 Page 37 |  |
| GM200 Page 40 |  |

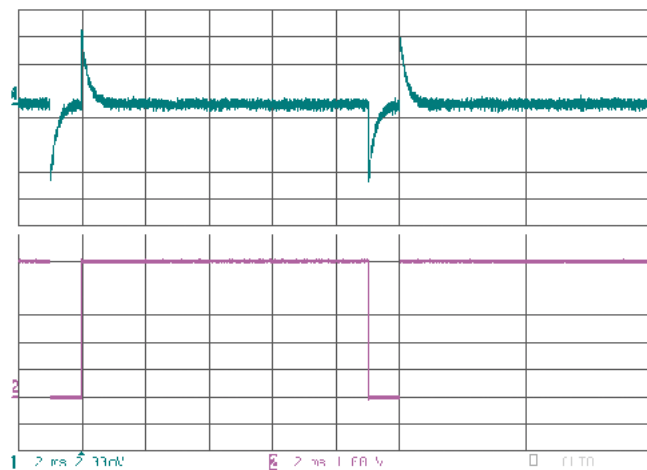


RZ Sheet RZ041

www.staubli.com/electrical

Isoprobe II – 10:1 ECO

Safety high-frequency 10:1 test probe highly flexible PVC-insulated coaxial connecting lead with BNC plug. Compensation adjust-


ment screw and Ø 2 mm safety socket for reference lead connection in the handling part. Economically priced model.

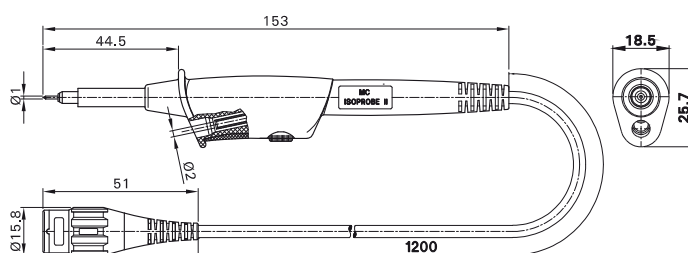

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|------------------------|---------------------------------|------------------|--------|
| 68.9880-12028 | Isoprobe II – 10:1 ECO | PVC CE cUL _{us} LISTED | 120 | 28 |

Technical Data

| | |
|-------------------------------------|-------------------------------------|
| Rated voltage (frequency-dependent) | Max. 600 V, CAT II (300 V, CAT III) |
| Dividing ratio | 10:1 |
| Input capacitance | 13 pF |
| Compensation range (works setting) | 10 pF ... 30 pF (15 pF) |
| Input resistance | 10 MΩ |
| Frequency range | 0 ... 500 MHz |
| Rise time | 1 ns |
| Lead length | 120 cm |

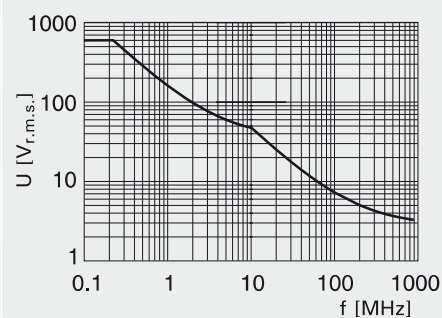

RZ Sheet RZ048

www.staubli.com/electrical

SET Isoprobe II – 10:1 ECO





The basic set Isoprobe II - 10:1 ECO includes a basic set of accessories for effect-


ing safe and accurate high-frequency measurements. Good value for money.



| Order No. | Type | Rated voltage | | Colour |
|------------|----------------------------|-------------------------------------|------------------------------------------------------------------------------------------|--------|
| 68.9491-28 | SET Isoprobe II – 10:1 ECO | Max. 600 V, CAT II (300 V, CAT III) | CE  | 28 |

Supplied components

| | |
|-----------------------------------|-------------------------------------------------------------------------------------|
| Isoprobe II – 10:1 ECO Page 14 |  |
| HC200 Page 37 |  |
| GS400 Page 38 |  |
| GM200 Page 40 |  |

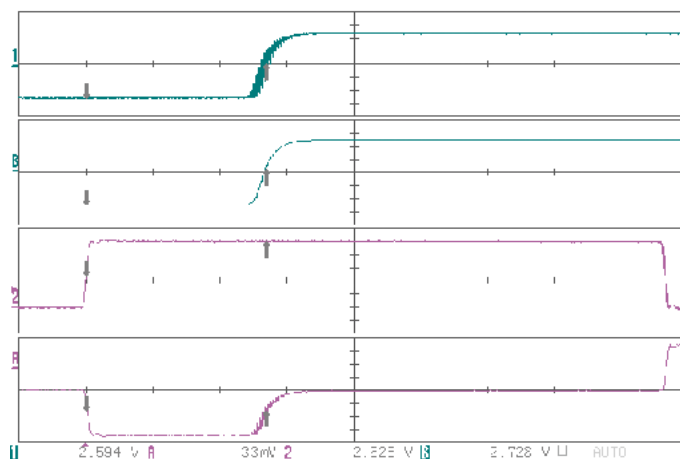


RZ Sheet RZ048

www.staubli.com/electrical

Isoprobe II – 10:1 HF

Safety high-frequency 10:1 test probe highly flexible PVC-insulated coaxial connecting lead with BNC plug. Compensation adjustment screw and Ø 2 mm safety socket for


reference lead connection in the handling part. Wide frequency range combined with high dielectric strength.

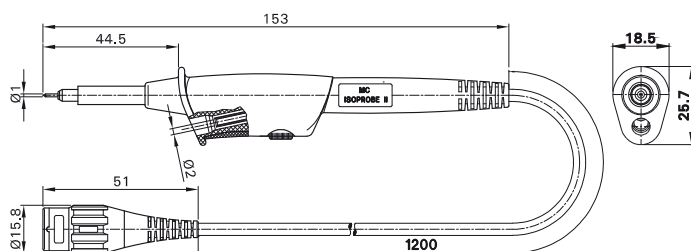

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|-----------------------|------------------|------------------|--------|
| 68.9872-12022 | Isoprobe II – 10:1 HF | PVC CE UL LISTED | 120 | 22 |

Technical Data

| | |
|-------------------------------------|--------------------------------------|
| Rated voltage (frequency-dependent) | Max. 1000 V, CAT II (600 V, CAT III) |
| Dividing ratio | 10:1 |
| Input capacitance | 14 pF |
| Compensation range (works setting) | 12 pF ... 22 pF (15 pF) |
| Input resistance | 10 MΩ |
| Frequency range | 0 ... 450 MHz |
| Rise time | 1 ns |
| Lead length | 120 cm |

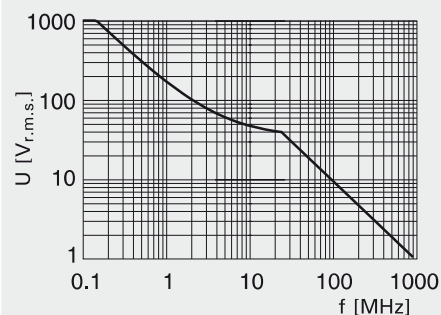


RZ Sheet RZ042

www.staubli.com/electrical






SET Isoprobe II – 10:1 HF


Test probe set with extensive range of accessories for the needs of the professionally equipped test engineer.



| Order No. | Type | Rated voltage | | Colour |
|------------|---------------------------|--------------------------------------|------------------------------------------------------------------------------------------|--------|
| 68.9492-22 | SET Isoprobe II – 10:1 HF | Max. 1000 V, CAT II (600 V, CAT III) | CE  | 22 |

Supplied components

| | |
|----------------------------------|-------------------------------------------------------------------------------------|
| Isoprobe II – 10:1 HF Page 16 |  |
| HC200 Page 37 |  |
| GS400 Page 38 |  |
| GH200 Page 39 |  |
| GM200 Page 40 |  |

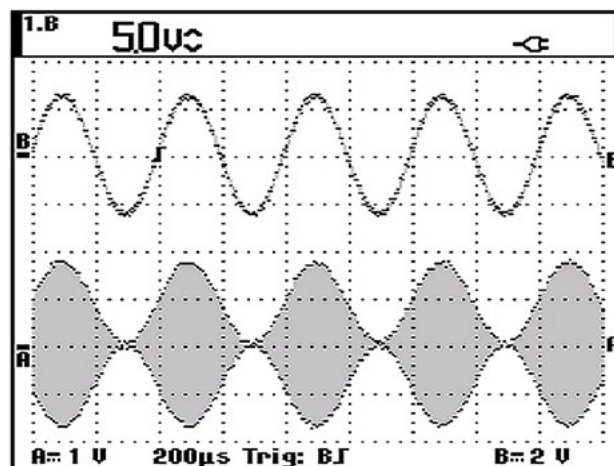


RZ Sheet RZ042

www.staubli.com/electrical

Isoprobe II – 10:1 HS

Safety high-frequency 10:1 test probe highly flexible PVC-insulated coaxial connecting lead with BNC plug. Compensation adjust-


ment screw and Ø 2 mm safety socket for reference lead connection in the handling part.

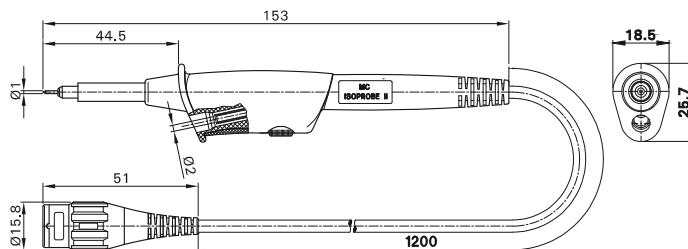

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|-----------------------|------------------|------------------|--------|
| 68.9871-12028 | Isoprobe II – 10:1 HS | PVC CE UL LISTED | 120 | 28 |

Technical Data

| | |
|-------------------------------------|--------------------------------------|
| Rated voltage (frequency-dependent) | Max. 1000 V, CAT II (600 V, CAT III) |
| Dividing ratio | 10:1 |
| Input capacitance | 16 pF |
| Compensation range (works setting) | 10 pF ... 35 pF (25 pF) |
| Input resistance | 10 MΩ |
| Frequency range | 0 ... 250 MHz |
| Rise time | 1.2 ns |
| Lead length | 120 cm |

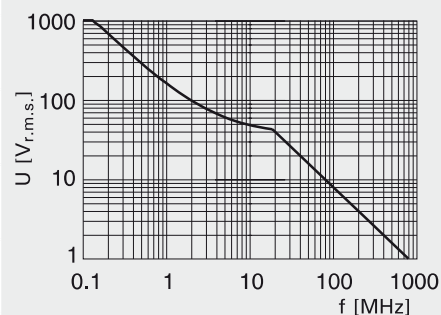

RZ Sheet RZ062

www.staubli.com/electrical

SET Isoprobe II – 10:1 HS


Test probe set with an extensive range of accessories, suitable for users like electric power engineers who carry out measurements directly on the mains.



| Order No. | Type | Rated voltage | | Colour |
|------------|---------------------------|--------------------------------------|-----------------|--------|
| 68.9493-28 | SET Isoprobe II – 10:1 HS | Max. 1000 V, CAT II (600 V, CAT III) | CE cULUS LISTED | 28 |

Supplied components

| | |
|----------------------------------|--|
| Isoprobe II – 10:1 HS Page 18 | |
| HC200 Page 37 | |
| AC200 Page 37 | |
| GM200 Page 40 | |
| AB200 Page 39 | |
| GB200 Page 40 | |

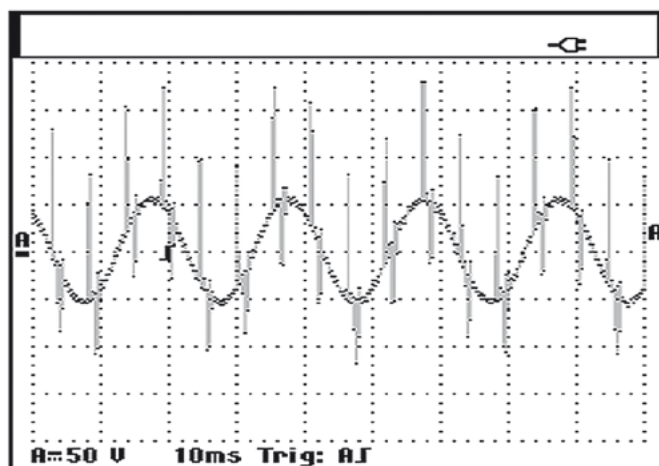


RZ Sheet RZ062

www.staubli.com/electrical

Isoprobe II – 10:1 – 2,5

Safety high-frequency 10:1 test probe with a long, highly flexible PVC-insulated coaxial connecting lead with BNC plug, specially suited for bridging long distances between the test instrument and the object under

test. Compensation adjustment screw and Ø 2 mm safety socket for reference lead connection in the handling part.

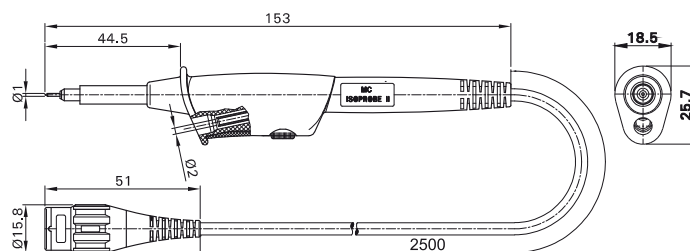

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|--------------------------|-------------------|------------------|--------|
| 68.9495-25022 | Isoprobe II – 10:1 – 2,5 | PVC CE cUL LISTED | 250 | 22 |

| Technical Data | | |
|-------------------------------------|--------------------------------------|--|
| Rated voltage (frequency-dependent) | Max. 1000 V, CAT II (600 V, CAT III) | |
| Dividing ratio | 10:1 | |
| Input capacitance | 18 pF | |
| Compensation range (works setting) | 10 pF ... 30 pF (15 pF) | |
| Input resistance | 10 MΩ | |
| Frequency range | 0 ... 150 MHz | |
| Rise time | 1.3 ns | |
| Lead length | 250 cm | |



RZ Sheet RZ052

www.staubli.com/electrical

SET Isoprobe II – 10:1 – 2,5

Test probe set, consisting of safety high-frequency test probe Isoprobe II - 10:1 - 2,5 and accessories. The test probe with long

connecting lead is specially suited for bridging long distances between the test instrument and the object under test.



| Order No. | Type | Rated voltage | | Colour |
|------------|------------------------------|--------------------------------------|--|--------|
| 68.9496-22 | SET Isoprobe II – 10:1 – 2,5 | Max. 1000 V, CAT II (600 V, CAT III) | | 22 |

Supplied components

| | |
|-------------------------------------|--|
| Isoprobe II – 10:1 – 2,5 Page 20 | |
| HC200 Page 37 | |
| GM200 Page 40 | |



RZ Sheet RZ052


www.staubli.com/electrical

Isoprobe II – 100:1

Safety high-frequency 100:1 test probe for safe measurements at high voltages. With highly flexible PVC-insulated coaxial connecting lead with BNC plug. Compensation

adjustment screw and Ø 2 mm safety socket for reference lead connection in the handling part. As a result of its low input capacitance and high input impedance, the probe is ide-

ally suited for measurements on sensitive circuits.

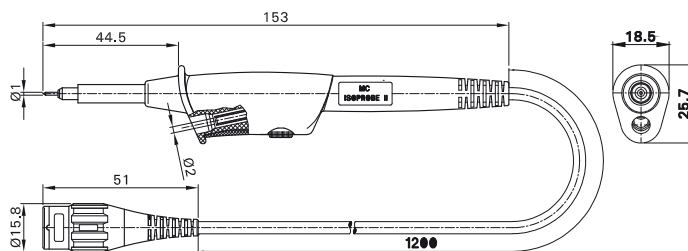

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|---------------------|------------------|------------------|--------|
| 68.9873-12023 | Isoprobe II – 100:1 | PVC CE UL LISTED | 120 | 23 |

| Technical Data | | |
|-------------------------------------|--------------------------------------------------------------|--|
| Rated voltage (frequency-dependent) | Max. 1000 V, CAT II (600 V, CAT III) (Max. 3540 V, CAT I) | |
| Dividing ratio | 100:1 | |
| Input capacitance | 6.5 pF | |
| Compensation range (works setting) | 10 pF ... 25 pF (15 pF) | |
| Input resistance | 100 MΩ | |
| Frequency range | 0 ... 300 MHz | |
| Rise time | 1 ns | |
| Lead length | 120 cm | |



RZ Sheet RZ043



www.staubli.com/electrical

SET Isoprobe II – 100:1





Test probe set for safe measurements at high voltages. As a result of its low input capacitance and high input impedance, the


probe is ideally suited for measurements on sensitive circuits.



| Order No. | Type | Rated voltage | | Colour |
|------------|-------------------------|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 68.9494-23 | SET Isoprobe II – 100:1 | Max. 1000 V, CAT II (600 V, CAT III) (max. 3540 V, CAT I) |   | 23 |

Supplied components

| | |
|--------------------------------|-------------------------------------------------------------------------------------|
| Isoprobe II – 100:1 Page 22 |  |
| ZGA-S Page 37 |  |
| GS400 Page 38 |  |
| GM200 Page 40 |  |

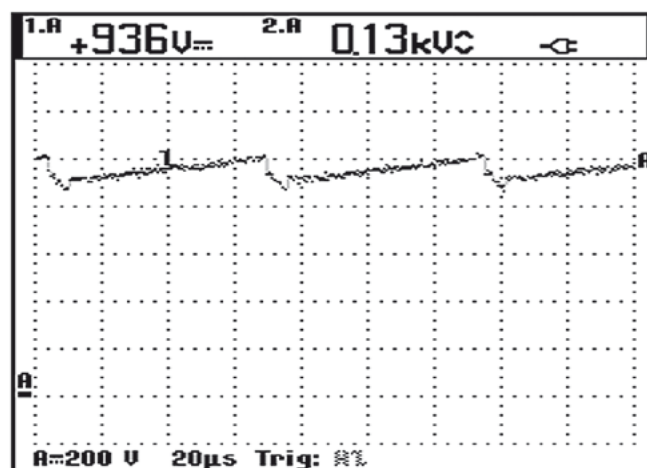

RZ Sheet RZ043


www.staubli.com/electrical

Touch-protected Passive Oscilloscope Probes Isoprobe III and Probe Sets

Isoprobe III – 10:1 ECO

Safety high-frequency 10:1 test probe. Highly flexible PVC-insulated coaxial connecting lead with BNC plug with integrated compensation unit. Ø 2 mm safety socket

for reference lead connection in the handling part of the probe. Good value for money.

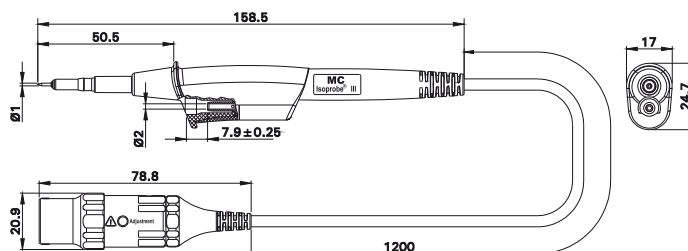

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|-------------------------|------------------|------------------|--------|
| 68.9501-12028 | Isoprobe III – 10:1 ECO | PVC CE UL LISTED | 120 | 28 |

| Technical Data | |
|-------------------------------------|----------------------------------------|
| Rated voltage (frequency-dependent) | Max. 600 V, CAT III (600 V, CAT IV) |
| Dividing ratio | 10:1 |
| Input capacitance | 12 pF |
| Compensation range (works setting) | 10 pF ... 22 pF (15 pF) |
| Input impedance | 10 MΩ |
| Frequency range | 0 ... 500 MHz |
| Rise time | 0.9 ns |
| Lead length | 120 cm |



RZ Sheet RZ086



www.staubli.com/electrical

SET Isoprobe III – 10:1 ECO







The basic set Isoprobe III - 10:1 ECO includes a basic set of accessories for effect-


ing safe and accurate high-frequency measurements. Good value for money.



| Order No. | Type | Rated voltage | | Colour |
|------------|-----------------------------|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 68.9558-28 | SET Isoprobe III – 10:1 ECO | Max. 600 V, CAT III (600 V, CAT IV) |   | 28 |

Supplied components

| | |
|------------------------------------|-------------------------------------------------------------------------------------|
| Isoprobe III – 10:1 ECO Page 25 |  |
| ZGA-S Page 37 |  |
| GS400 Page 38 |  |
| GM284 Page 40 |  |
| SK-IP Page 39 |  |
| SCC Page 40 |  |

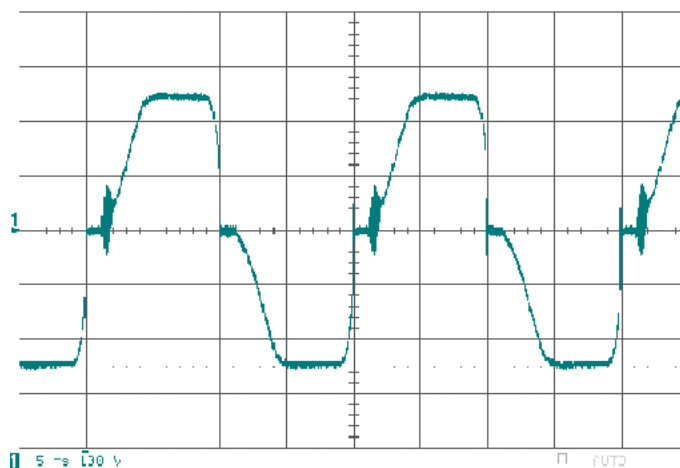

RZ Sheet RZ086


www.staubli.com/electrical

Isoprobe III – 10:1 HF

Safety high-frequency 10:1 test probe with wide frequency range combined with low input capacitance. Highly flexible PVC-

insulated coaxial connecting lead with BNC plug with integrated compensation unit.

Ø 2 mm safety socket for reference lead connection in the handling part of the probe.

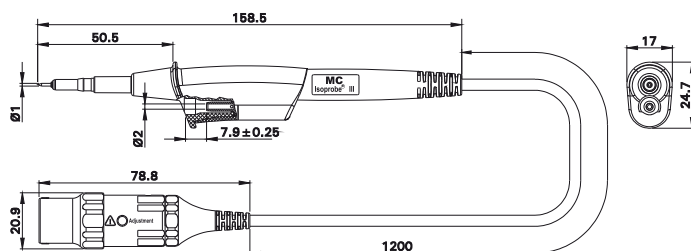

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|------------------------|---------------------|------------------|--------|
| 68.9534-12028 | Isoprobe III – 10:1 HF | PVC CE cULus LISTED | 120 | 28 |

| Technical Data | | |
|-------------------------------------|-----------------------------------------|--|
| Rated voltage (frequency-dependent) | Max. 1000 V, CAT III (600 V, CAT IV) | |
| Dividing ratio | 10:1 | |
| Input capacitance | 12 pF | |
| Compensation range (works setting) | 10 pF ... 22 pF (15 pF) | |
| Input resistance | 10 MΩ | |
| Frequency range | 0 ... 500 MHz | |
| Rise time | 0.9 ns | |
| Lead length | 120 cm | |



RZ Sheet RZ084


www.staubli.com/electrical

SET Isoprobe III – 10:1 HF








The Isoprobe III - 10:1 HF set with an extensive range of accessories meets the needs


of the professionally equipped electronic engineer.



| Order No. | Type | Rated voltage | | Colour |
|------------|----------------------------|-----------------------------------------|------------------------------------------------------------------------------------------|--------|
| 68.9556-28 | SET Isoprobe III – 10:1 HF | Max. 1000 V, CAT III (600 V, CAT IV) | CE  | 28 |

Supplied components

| | | | |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------|-------------------------------------------------------------------------------------|
| Isoprobe III – 10:1 HF Page 27 |  | | |
| ZGA-S Page 37 |  | SK-IP Page 39 |  |
| GS400 Page 38 |  | SCC Page 40 |  |
| GH284 Page 39 |  | | |
| GM284 Page 40 |  | | |

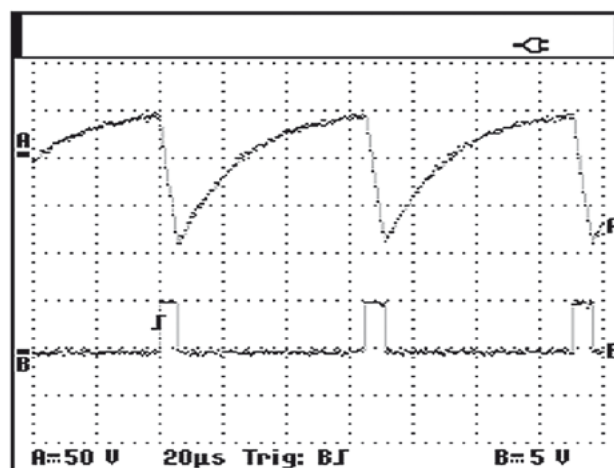


RZ Sheet RZ084

www.staubli.com/electrical

Isoprobe III – 10:1 HS

Safety high-frequency 10:1 test probe. Highly flexible PVC-insulated coaxial connecting lead with BNC plug with integrated

compensation unit. Ø 2 mm safety socket for reference lead connection in the handling part of the probe.

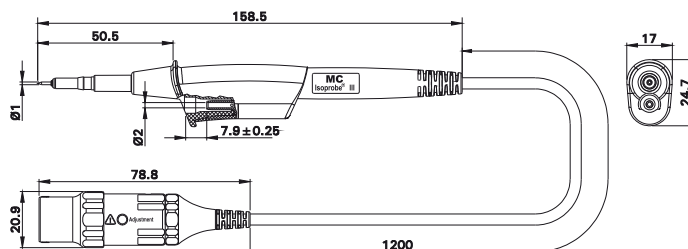

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|------------------------|-------------------|------------------|--------|
| 68.9533-12028 | Isoprobe III – 10:1 HS | PVC CE cUL LISTED | 120 | 28 |

| Technical Data | | |
|-------------------------------------|-----------------------------------------|--|
| Rated voltage (frequency-dependent) | Max. 1000 V, CAT III (600 V, CAT IV) | |
| Dividing ratio | 10:1 | |
| Input capacitance | 13.5 pF | |
| Compensation range (works setting) | 10 pF ... 30 pF (25 pF) | |
| Input resistance | 10 MΩ | |
| Frequency range | 0 ... 300 MHz | |
| Rise time | 1.1 ns | |
| Lead length | 120 cm | |



RZ Sheet RZ085

www.staubli.com/electrical


SET Isoprobe III – 10:1 HS

The particularly comprehensive accessories of the set Isoprobe III - 10:1 HS include, among others, two jaw clips for applications









such as test connections to busbars. This set addresses itself to heavy-current engi-


neers who make measurements directly on the mains.



| Order No. | Type | Rated voltage | | Colour |
|------------|----------------------------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------|--------|
| 68.9557-28 | SET Isoprobe III – 10:1 HS | Max. 1000 V, CAT III (600 V, CAT IV) | CE  <small>UL US LISTED</small> | 28 |

Supplied components

| | | | |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------|-------------------------------------------------------------------------------------|
| Isoprobe III – 10:1 HS Page 29 |  | | |
| ZGA-S Page 37 |  | SK-IP Page 39 |  |
| AC200 Page 37 |  | SCC Page 40 |  |
| GM284 Page 40 |  | | |
| AB200 Page 39 |  | | |
| GB284 Page 40 |  | | |

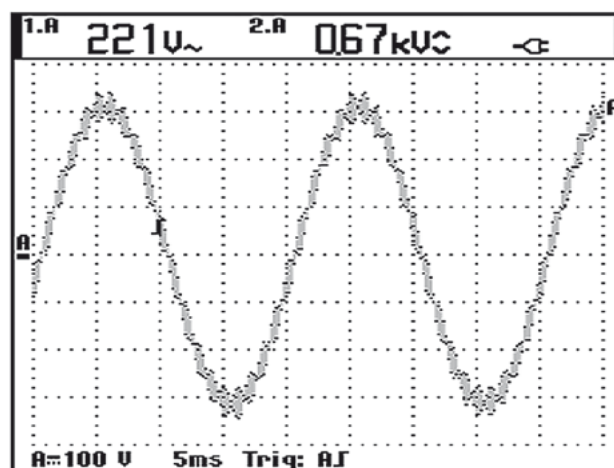


RZ Sheet RZ085

www.staubli.com/electrical

Isoprobe III – 10:1 – 2,5

Safety high-frequency 10:1 test probe. Highly flexible PVC-insulated coaxial connecting lead with BNC plug with integrated compensation unit. Ø 2 mm safety socket for reference lead connection in the handling

part of the probe. With long connecting lead, specially suited for bridging long distances between the test instrument and the object under test.

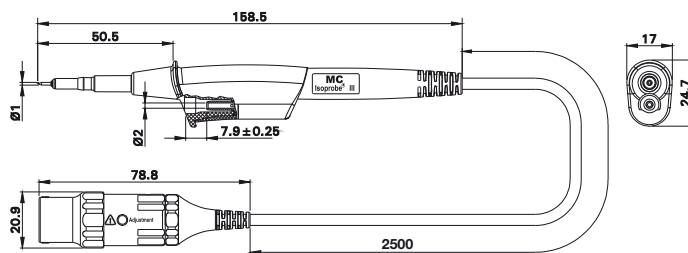

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|---------------------------|-------------------|------------------|--------|
| 68.9549-25028 | Isoprobe III – 10:1 – 2,5 | PVC CE cUL LISTED | 250 | 28 |

| Technical Data | |
|-------------------------------------|-----------------------------------------|
| Rated voltage (frequency-dependent) | Max. 1000 V, CAT III (600 V, CAT IV) |
| Dividing ratio | 10:1 |
| Input capacitance | 18 pF |
| Compensation range (works setting) | 10 pF ... 30 pF (15 pF) |
| Input resistance | 10 MΩ |
| Frequency range | 0 ... 250 MHz |
| Rise time | 1.3 ns |
| Lead length | 250 cm |



RZ Sheet RZ088



www.staubli.com/electrical

SET Isoprobe III – 10:1 – 2,5






Test probe set, consisting of safety high-frequency test probe Isoprobe III - 10:1 - 2,5 and accessories. The test probe with long

connecting lead is specially suited for bridging long distances between the test instrument and the object under test.



| Order No. | Type | Rated voltage | | Colour |
|------------|-------------------------------|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 68.9554-28 | SET Isoprobe III – 10:1 – 2,5 | Max. 1000 V, CAT III (600 V, CAT IV) |   | 28 |

Supplied components

| | |
|--------------------------------------|-------------------------------------------------------------------------------------|
| Isoprobe III – 10:1 – 2,5 Page 30 |  |
| ZGA-S Page 37 |  |
| GM284 Page 40 |  |
| SK-IP Page 39 |  |
| SCC Page 40 |  |



RZ Sheet RZ088


www.staubli.com/electrical

Isoprobe III – 100:1

Safety high-frequency 100:1 test probe for safe measurements at high voltages. Highly flexible PVC-insulated coaxial connecting lead with BNC plug with integrated compen-

sation unit. Ø 2 mm safety socket for reference lead connection in the handling part of the probe. As a result of its low input capacitance and high input resistance, the probe

is also ideally suited for measurements on sensitive circuits.

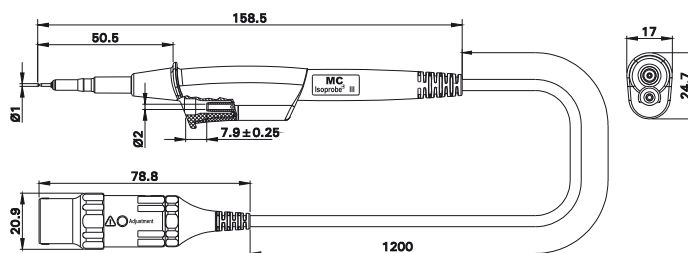

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|----------------------|------------------|------------------|--------|
| 68.9548-12023 | Isoprobe III – 100:1 | PVC CE UL LISTED | 120 | 23 |

| Technical Data | | |
|-------------------------------------|--------------------------------------------------------------|--|
| Rated voltage (frequency-dependent) | Max. 1000 V, CAT III (600 V, CAT IV) (Max. 3540 V, CAT I) | |
| Dividing ratio | 100:1 | |
| Input capacitance | 4.6 pF | |
| Compensation range (works setting) | 10 pF ... 25 pF (15 pF) | |
| Input resistance | 100 MΩ | |
| Frequency range | 0 ... 500 MHz | |
| Rise time | 0.9 ns | |
| Lead length | 120 cm | |



RZ Sheet RZ087


www.staubli.com/electrical

SET Isoprobe III – 100:1







Test probe set for safe measurements at high voltages. Due to the low input capacity and high input impedance of the probe, the Set


Isoprobe III - 100:1 is also particularly suited for measurements on sensitive circuits.



| Order No. | Type | Rated voltage | | Colour |
|------------|--------------------------|--------------------------------------------------------------|------------------------------------------------------------------------------------------|--------|
| 68.9559-23 | SET Isoprobe III – 100:1 | Max. 1000 V, CAT III (600 V, CAT IV) (max. 3540 V, CAT I) | CE  | 23 |

Supplied components

| | |
|---------------------------------|-------------------------------------------------------------------------------------|
| Isoprobe III – 100:1 Page 32 |  |
| ZGA-S Page 37 |  |
| GS400 Page 38 |  |
| GM284 Page 40 |  |
| SK-IP Page 39 |  |
| SCC Page 40 |  |

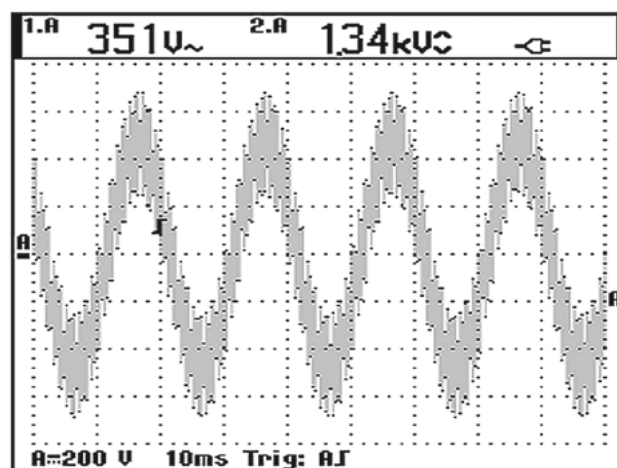

RZ Sheet RZ087

www.staubli.com/electrical

High-pass Oscilloscope Probe: Isoprobe III-HP

With Isoprobe III - HP we have added a probe with an integrated high-pass filter to our Isoprobe III range of touch-protected high-frequency probes.

The new development can, for instance, be used for transient measurement in network analysis.

The insulators are designed for max. 1000 V, CAT III resp. 600 V, CAT IV (frequency-dependent) in accordance with IEC / EN 61010-031, which allows safe use in corresponding environments – provided that appropriate accessories and test instruments are used.

The integrated high-pass filter suppresses the low-frequency components of a signal (still present on the left), thus improving visibility of the high-frequency components such as transients (right).



The Isoprobe III - HP probe is available both separately and in a set with ample accessories.

Accessories of SET Isoprobe III - HP:

- ZGA-S: Push-on hook clip
 - GM284: Reference lead with crocodile clip
 - SK-IP: Push-on insulating sleeve
 - SCC: Set of colour clips
- *: Protective cap



Isoprobe III – HP


Safety high-frequency oscilloscope probe with an integrated high-pass filter. Highly flexible PVC-insulated coaxial connecting

lead with BNC plug. Ø 2 mm safety socket for reference lead connection in the handling part of the probe.



RZ Sheet RZ100

www.staubli.com/electrical

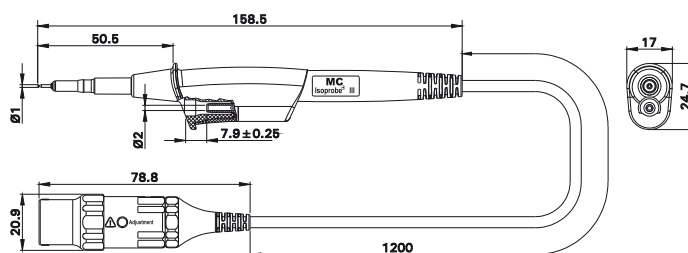

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|-------------------|-----|------------------|--------|
| 68.9455-12028 | Isoprobe III – HP | PVC | 120 | 28 |

Technical Data

| | | |
|-------------------------------------------------|--------------------------------------------------------------|--|
| Rated voltage (frequency-dependent) | Max. 1000 V, CAT III (600 V, CAT IV) (Max. 3540 V, CAT I) | |
| Dividing ratio ($\pm 3\%$, $f=10$ kHz) | 100:1 ($f > 1,1$ kHz) | |
| Attenuation ($f = 50$ Hz compared with 10 kHz) | > 40dB | |
| Input capacitance | < 8 pF | |
| Scope capacitance | 12 pF ... 25 pF | |
| Input resistance | 100 M Ω | |
| Frequency range | 1.1 kHz ... 35 MHz (3 dB) | |
| Rise time | < 10ns | |
| Lead length | 120 cm | |

SET Isoprobe III – HP

The set Isoprobe III - HP contains accessories to meet the needs of a professionally equipped test engineer.



| Order No. | Type | Rated voltage | | Colour |
|------------|-----------------------|--------------------------------------------------------------|--------|--------|
| 68.9456-28 | SET Isoprobe III – HP | Max. 1000 V, CAT III (600 V, CAT IV) (max. 3540 V, CAT I) | PVC CE | 28 |

Supplied components

| | |
|------------------------------|--|
| Isoprobe III – HP Page 35 | |
| ZGA-S Page 37 | |
| GM284 Page 40 | |
| SK-IP Page 39 | |
| SCC Page 40 | |




RZ Sheet RZ100




www.staubli.com/electrical

Isoprobe II / III – Accessories

HC200

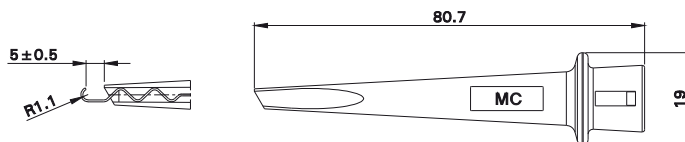
Push-on hook clip.






| Order No. | Type | Rated voltage | | *Colours |
|-----------|-------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 68.9480-* | HC200 | 1000 V, CAT II (600 V, CAT III) |   |  |

ZGA

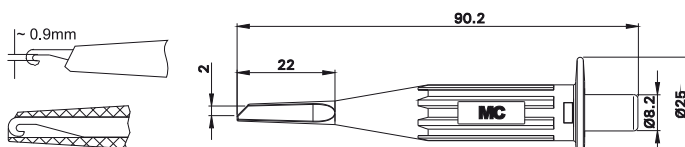
Push-on hook clip.






| Order No. | Type | Rated voltage | | *Colours |
|-----------|------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 68.9817-* | ZGA | 1000 V, CAT II (600 V, CAT III) |   |  |

ZGA-S

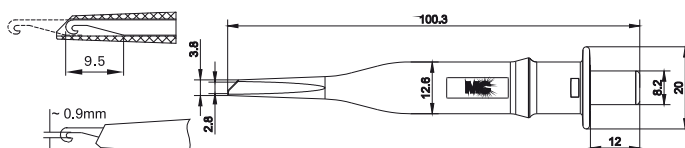
Push-on hook clip.






| Order No. | Type | Rated voltage | | *Colours |
|-----------|-------|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 68.9805-* | ZGA-S | 1000 V, CAT III (600 V, CAT IV) (max. 3540 V, CAT I) |   |  |

AC200


Push-on safety jaw clip. For increased safety when making connections, the jaws are insulated on the outside.



| Order No. | Type | Rated voltage | | *Colours |
|-----------|-------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 68.9485-* | AC200 | 1000 V, CAT III (600 V, CAT IV) |   |  |

PB200


Push-on Ø 4 mm test probe.

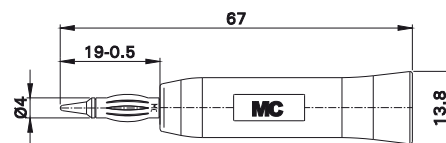

| Order No. | Type | Rated voltage | | *Colours |
|-----------|-------|----------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 68.9481-* | PB200 | 1000 V, CAT II | | 21 22 23 28 |

PT200


Push-on Ø 2 mm test probe.

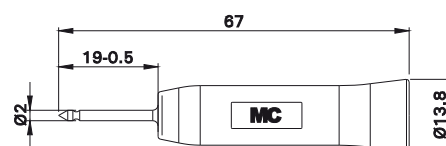

| Order No. | Type | Rated voltage | | *Colours |
|-----------|-------|----------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 68.9483-* | PT200 | 1000 V, CAT II | | 21 22 23 28 |

GS400


Push-on reference contact.



| Order No. | Type | Rated voltage | | Colour |
|------------|-------|-----------------------------------------|--|------------------------------------------------------------------------------|
| 68.9443-21 | GS400 | 30 V _{AC} / 60 V _{DC} | | 21 |

XTBA

Push-on BNC male connector.

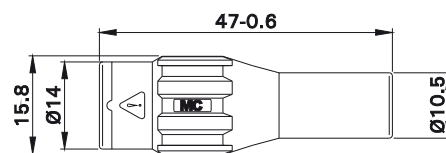

| Order No. | Type | Rated voltage | | *Colours |
|-----------|------|--------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 68.9809-* | XTBA | Max. 1000 V, CAT II (600 V, CAT III) | | 21 22 23 |




RZ Sheet RZ013

www.staubli.com/electrical

SK-IP

Push-on insulating sleeve.




| Order No. | Type | *Colours |
|-----------|-------|----------|
| 68.9514-* | SK-IP | 23 28 |

AB200

Test clip with steel jaws especially for connections to ground rails and thick cables. For increased safety when making connec-

tions, the jaws are insulated on the outside. Ø 4 mm rigid socket in handle accepting


spring-loaded Ø 4 mm plugs with rigid insulating sleeve.

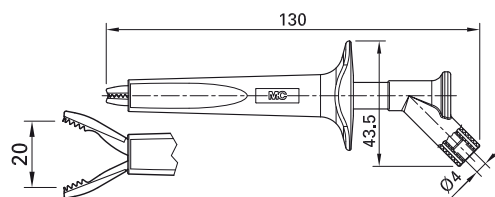

| Order No. | Type | Rated voltage/current | | *Colours |
|-----------|-------|-----------------------|--------------------|-------------|
| 66.9474-* | AB200 | 1000 V, CAT IV / 20 A | Ni CE cULUS LISTED | 21 22 23 28 |

GH200 GH284

Ø 2 mm Reference lead with hook clip (length 15 cm).

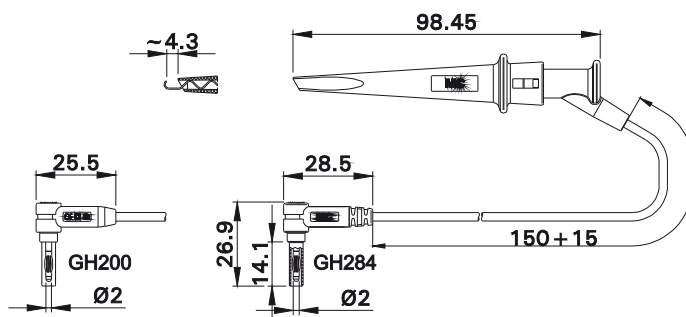


| Order No. | Type | Rated voltage | Lead cross section | | Lead length [cm] | Colour |
|---------------|-------|---------------------------------|----------------------|---------------------|------------------|--------|
| 68.9486-01521 | GH200 | 1000 V, CAT II (600 V, CAT III) | 0.50 mm ² | SIL CE cULUS LISTED | 015 | 21 |
| 68.9519-01521 | GH284 | 1000 V, CAT III (600 V, CAT IV) | 0.50 mm ² | SIL CE cULUS LISTED | 015 | 21 |

GM200-F GM200 GM284

Highly flexible reference leads with insulation in PVC or silicone. One end with right

angled Ø 2 mm plug with rigid insulating sleeve, other end with crocodile clip with all-

round insulation and toothed gripping jaws with fine-wire clamping surface.

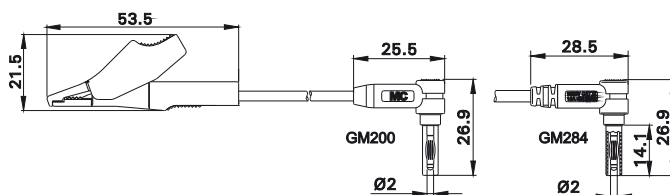


| Order No. | Type | Rated voltage/current | Lead cross section | | Lead length [cm] | Colour |
|---------------|---------|-------------------------------------------|----------------------|------------------------------------|------------------|--------|
| 68.9488-02521 | GM200-F | 1000 V, CAT II (600 V, CAT III) / 10 A | 0.50 mm ² | SIL CE cUL ^{US} LISTED | 025 | 21 |
| 68.9487-02521 | GM200 | 1000 V, CAT II (600 V, CAT III) / 10 A | 0.50 mm ² | SIL CE cUL ^{US} LISTED | 025 | 21 |
| 68.9517-02521 | GM284 | 1000 V, CAT III (600 V, CAT IV) / 10 A | 0.50 mm ² | SIL CE cUL ^{US} LISTED | 025 | 21 |

GB200 GB284

Highly flexible Silicone-insulated reference leads. One end with Ø 2 mm safety plug,



other end with Ø 4 mm safety plug. Lead length: 50 cm.

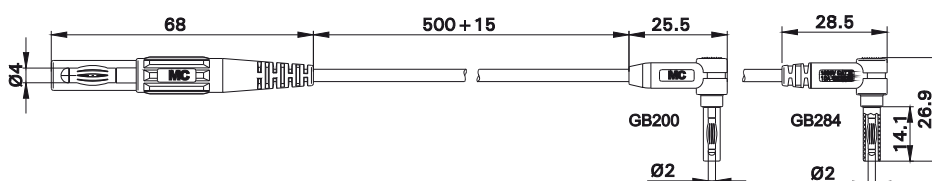

| Order No. | Type | Rated voltage/current | Lead cross section | | Lead length [cm] | Colour |
|---------------|-------|-------------------------------------------|----------------------|------------------------------------|------------------|--------|
| 68.9489-05021 | GB200 | 1000 V, CAT II (600 V, CAT III) / 10 A | 0.75 mm ² | SIL CE cUL ^{US} LISTED | 050 | 21 |
| 68.9518-05021 | GB284 | 1000 V, CAT III (600 V, CAT IV) / 10 A | 0.75 mm ² | SIL CE cUL ^{US} LISTED | 050 | 21 |

SCC

Set of colour clips for Isoprobe connecting lead (5 x 2 pcs.).



| Order No. | Type |
|-----------|------|
| 68.9513 | SCC |

BNC Safety Test Leads

XLSS-58 XLSK-58


Touch-protected coaxial test leads. Versions with BNC male connectors on both ends or with male and female connector. The shield

of the BNC connectors is nickel-plated, the contact pins and sockets of the inner conductor are in gold-plated brass.



RZ Sheet RZ013, 014

www.staubli.com/electrical

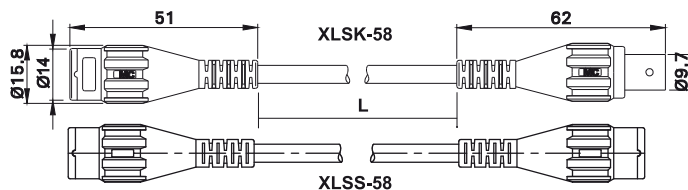

| Order No. | Type | | Lead lengths L [cm] | *Colours |
|-------------------------------------|---------|---------------------------------|---------------------|----------|
| 67.9770- <input type="checkbox"/> * | XLSS-58 | Au Ni PVC CE C-UL LISTED RZ 014 | 050 100 150 200 | 21 22 23 |
| 67.9773- <input type="checkbox"/> * | XLSK-58 | Au Ni PVC CE C-UL LISTED RZ 013 | 050 100 150 200 | 21 22 23 |


| Technical Data | | |
|-----------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Type | XLSS-58 | XLSK-58 |
| Rated voltage | 1000 V, CAT II (600 V, CAT III) | 600 V, CAT II (300 V, CAT III) |
| Impedance | 50 Ω | 50 Ω |
| Capacity | 60 pF (L = 50 cm) 113 pF (L = 100 cm) 166 pF (L = 150 cm) 219 pF (L = 200 cm) | 60 pF (L = 50 cm) 113 pF (L = 100 cm) 166 pF (L = 150 cm) 219 pF (L = 200 cm) |
| Inductance | 170 nH (L = 50 cm) 340 nH (L = 100 cm) 510 nH (L = 150 cm) 680 nH (L = 200 cm) | 170 nH (L = 50 cm) 340 nH (L = 100 cm) 510 nH (L = 150 cm) 680 nH (L = 200 cm) |
| VSWR (frequency-dependent) | | |
| Typical values! | | |
| Attenuation (frequency-dependent) | | |
| Coaxial lead / Insulation | RG58 / PVC | RG58 / PVC |
| Coaxial lead / Temperature range | -10°C ... +70°C | -10°C ... +70°C |

XLSS-174

Touch-protected PVC-insulated coaxial test leads. Version with BNC male connector

on both ends. The shield of the BNC connectors is nickel-plated, the contact pins

and sockets of the inner conductor are in gold-plated brass.

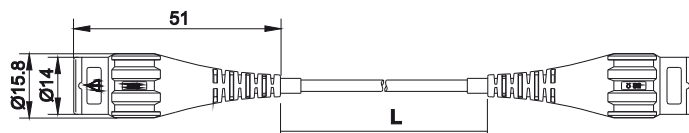

| Order No. | Type | | Lead lengths L [cm] | *Colours |
|----------------------------------|----------|--------------|-----------------------------------------------------------------------------------------------------|-------------------------|
| 67.9553- <input type="text"/> 21 | XLSS-174 | Au Ni PVC CE | <input type="text"/> 050 <input type="text"/> 100 <input type="text"/> 150 <input type="text"/> 200 | <input type="text"/> 21 |

| Technical Data | |
|-----------------------------------------------|-----------------------------------------------------------------------------------------|
| Rated voltage | 600 V, CAT II (300 V, CAT III) |
| Impedance | 50 Ω |
| Capacity | 60 pF (L = 50 cm) 113 pF (L = 100 cm) 166 pF (L = 150 cm) 219 pF (L = 200 cm) |
| Inductance | 225 nH (L = 50 cm) 450 nH (L = 100 cm) 675 nH (L = 150 cm) 900 nH (L = 200 cm) |
| VSWR (frequency-dependent) Typical values! | |
| Attenuation (frequency-dependent) | |
| Coaxial lead / Insulation | RG174 / PVC |
| Coaxial lead / Temperature range | -10°C ... +70°C |



RZ Sheet RZ013


www.staubli.com/electrical

XLSS/SIL

Touch-protected silicone insulated coaxial test leads with BNC male connectors on

both ends, e. g. for connecting measuring instruments. The shield of the BNC connec-

tors is nickel-plated, the contact pins of the inner conductor are in gold-plated brass.

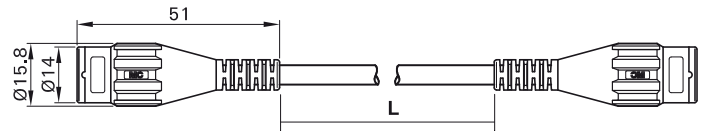

| Order No. | Type | | Lead lengths L [cm] | *Colours |
|---------------------------------|----------|---------------------------|---------------------|----------|
| 67.9756- <input type="text"/> * | XLSS/SIL | Au Ni SIL CE cULUS LISTED | 050 100 150 200 | 21 22 23 |

| Technical Data | |
|-----------------------------------|-----------------------------------------------------------------------------------------|
| Rated voltage | 1000 V, CAT II (600 V, CAT III) |
| Impedance | ~ 45 Ω |
| Capacity | 85 pF (L = 50 cm) 162 pF (L = 100 cm) 240 pF (L = 150 cm) 317 pF (L = 200 cm) |
| Inductance | 160 nH (L = 50 cm) 320 nH (L = 100 cm) 480 nH (L = 150 cm) 640 nH (L = 200 cm) |
| Attenuation (frequency-dependent) | <p>RG174 RG58 SILI-SC 0,5/1,0</p> |
| Coaxial lead / Insulation | SILI-SC 0,5/1,0 / Silicon |
| Coaxial lead / Temperature range | -50°C ... +150°C |



RZ Sheet RZ014

www.staubli.com/electrical

Note:

In the assembly of BNC leads for use in the high-frequency range, the plugs and coax cables must be carefully matched in order to ensure unimpaired signal transmission. We will be pleased to advise you. In our main catalogue for cables and multistrand wires you will


find highly flexible silicone and PVC insulated coaxial leads in various colours together with a wide range of other multi-strand cables. Order it now!

XLWW-58 XLWW/SIL

Touch-protected PVC or silicone insulated coaxial test leads with BNC male connectors on both ends, angled for ergonomic

cable arrangement and rotatable through 360° about the plugging axis. The shield of the BNC connectors is nickel-plated, the

contact pins of the inner conductor are in gold-plated brass.

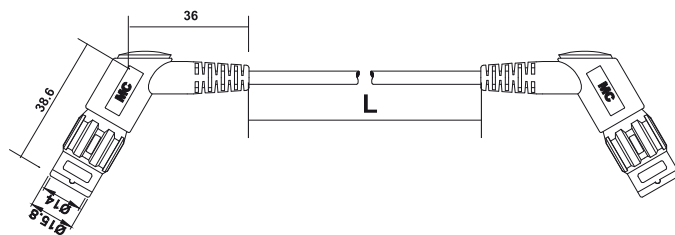

| Order No. | Type | Wire type | | Lead lengths L [cm] | *Colours |
|-------------------------------------|----------|-----------------|-------------------------------------|---------------------|----------|
| 67.9551- <input type="checkbox"/> * | XLWW-58 | RG58 | Au Ni PVC CE C _{UL} LISTED | 050 100 150 200 | 21 22 23 |
| 67.9552- <input type="checkbox"/> * | XLWW/SIL | SILI-SC 0,5/1,0 | Au Ni SIL CE C _{UL} LISTED | 050 100 150 200 | 21 22 28 |

| Technical Data | | |
|------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Type | XLWW-58 | XLWW/SIL |
| Rated voltage | 1000 V, CAT II (600 V, CAT III) | 1000 V, CAT II (600 V, CAT III) |
| Impedance | 50 Ω | ~ 45 Ω |
| Capacity | 67 pF (L = 50 cm) 120 pF (L = 100 cm) 173 pF (L = 150 cm) 226 pF (L = 200 cm) | 92 pF (L = 50 cm) 169 pF (L = 100 cm) 247 pF (L = 150 cm) 324 pF (L = 200 cm) |
| Inductance | 170 nH (L = 50 cm) 340 nH (L = 100 cm) 510 nH (L = 150 cm) 680 nH (L = 200 cm) | 160 nH (L = 50 cm) 320 nH (L = 100 cm) 480 nH (L = 150 cm) 640 nH (L = 200 cm) |
| VSWR (frequency-dependent) Typical values! | | No data available. |
| Attenuation (frequency-dependent) RG58 SILI-SC 0,5/1,0 | | |
| Coaxial lead (Type) / Insulation | RG58 / PVC | SILI-SC 0,5/1,0 / Silicon |
| Coaxial lead / Temperature range | -10°C ... +70°C | -50°C ... +150°C |


Touch-protected BNC Connectors and BNC Panel-mount Sockets

XBS-58 XBK-58

Touch-protected BNC male and female connectors for production of touch-protected

BNC leads (RG58). Shield is nickel-plated, the contact pins and sockets of the inner

conductor are in gold-plated brass.

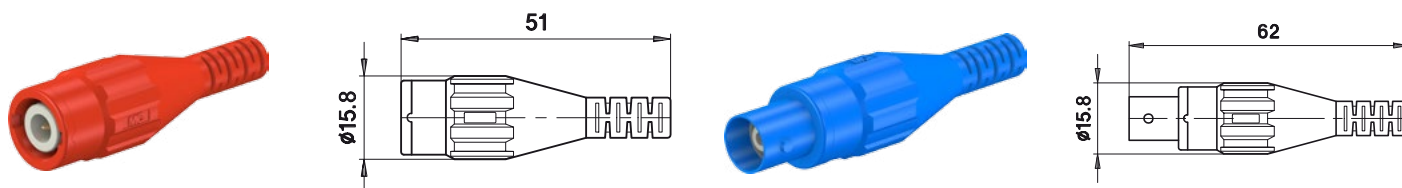

| Order No. | Type | Assembly instructions | | *Colours |
|-----------|--------|-----------------------|-------|-------------|
| 67.9760-* | XBS-58 | MAH 529 | Au Ni | 21 22 23 28 |
| 67.9762-* | XBK-58 | MAH 540 | Au Ni | 21 22 23 28 |

| Technical Data | | | |
|---------------------------------------------------------|---------------------------------------|--------------------------------------|--|
| Type | XBS-58 | XBK-58 | |
| Rated voltage / current | 1000 V, CAT II (600 V, CAT III) / 1 A | 600 V, CAT II (300 V, CAT III) / 1 A | |
| Frequency range | 0 ... 3000 MHz | 0 ... 3000 MHz | |
| VSWR (frequency-dependent) Typical values! | f = 2000 MHz: < 1.2 | f = 2000 MHz: < 1.2 | |
| Insertion loss (frequency-dependent) Typical values! | f = 2000 MHz: < 0.2 dB | f = 2000 MHz: < 0.4 dB | |
| Connectable coaxial lead: Type / outer diameter | RG58 / ~ Ø 5 mm | RG58 / ~ Ø 5 mm | |
| Temperature range | +5°C ... +40°C | +5°C ... +40°C | |





Assembly instructions MAH 529, MAH 540

www.staubli.com/electrical

XBB-C58

Touch-protected BNC panel-mount sockets for accepting BNC male connectors. The sockets can be screw-mounted into pre-drilled panels of plastic, metal, etc. Shield

is nickel-plated, the contact socket of the inner conductor is in gold-plated brass. Connection for RG58 cable.

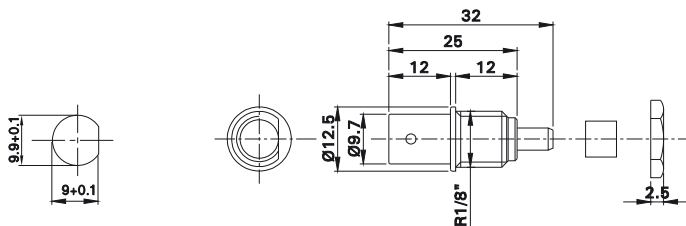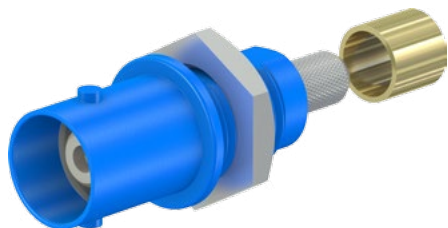

| Order No. | Type | Shield connection | | *Colours |
|-----------|---------|-------------------|-------|-------------|
| 67.9766-* | XBB-C58 | RG58 | Au Ni | 21 22 23 28 |

Technical Data

| | |
|---------------------------------------------------------|--------------------------------------------------------------------|
| Rated voltage / current | 600 V, CAT II (300 V, CAT III) / 1 A |
| Frequency range | 0 ... 3000 MHz |
| VSWR (frequency-dependent) Typical values! | <p>$f = 2000 \text{ MHz}: < 1.2$</p> |
| Insertion loss (frequency-dependent) Typical values! | <p>$f = 2000 \text{ MHz}: < 0.4 \text{ dB}$</p> |
| Connection inner conductor | Contact socket (brass, gold-plated) for crimp or solder connection |
| Shield connection | Crimp connection (brass, nickel-plated) for RG58 |
| Temperature range | +5°C ... +40°C |



Assembly instructions MAH 542



www.staubli.com/electrical

XBB-L XBB-LL

Touch-protected BNC panel-mount sockets for accepting BNC male connectors. The sockets can be screw-mounted into pre-

drilled panels of plastic, metal, etc. Shield is nickel-plated, the contact socket of the inner conductor is in gold-plated brass. Type

XBB-LL with extended shield for better radiation suppression in unmated condition. Solder connection.

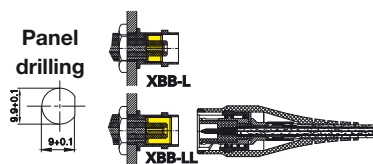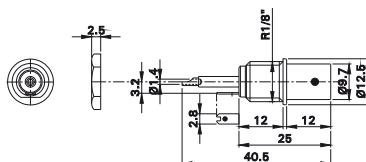

| Order No. | Type | Type of shield | | *Colours |
|-----------|--------|----------------|----------|-------------|
| 67.9764-* | XBB-L | short | Au Ni Ag | 21 22 23 28 |
| 67.9571-* | XBB-LL | long | Au Ni Ag | 21 22 23 28 |

| Technical Data | | |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Type | XBB-L | XBB-LL |
| Rated voltage / current | 1000 V, CAT II ¹⁾ (600 V, CAT III) ¹⁾ / 1 A 600 V, CAT II ²⁾ (300 V, CAT III) ²⁾ / 1 A | 1000 V, CAT II ¹⁾ (600 V, CAT III) ¹⁾ / 1 A 600 V, CAT II ²⁾ (300 V, CAT III) ²⁾ / 1 A |
| Frequency range | 0 ... 1500 MHz | 0 ... 1500 MHz |
| VSWR (frequency-dependent) Typical values! | f = 500 MHz: < 1.2 | f = 500 MHz: < 1.2 |
| | Insertion loss (frequency-dependent) Typical values! | f = 500 MHz: < 0.2 dB |
| Connection inner conductor | Round solder pin (brass, gold-plated) | Round solder pin (brass, gold-plated) |
| Shield connection | Solder connection (brass, silver-plated) | Solder connection (brass, silver-plated) |
| Temperature range | +5°C ... +40°C | +5°C ... +40°C |



Assembly instructions MAH 530

www.staubli.com/electrical

¹⁾ For mounting into pre-drilled plastic housings (double insulation) or metal housings³⁾ (basic insulation, with protective conductor)

²⁾ For mounting into pre-drilled metal housings³⁾ (double insulation, without protective conductor)



³⁾ Panel thickness max. 3 mm

XBB-P XBB-PL

Touch-protected BNC panel-mount sockets for accepting BNC male connectors. The sockets can be screw-mounted into pre-

drilled panels of plastic, metal, etc. Shield is nickel-plated, the contact socket of the inner conductor is in gold-plated brass. Type

XBB-PL with extended shield for better radiation suppression in unmated condition. Solder connection wires.

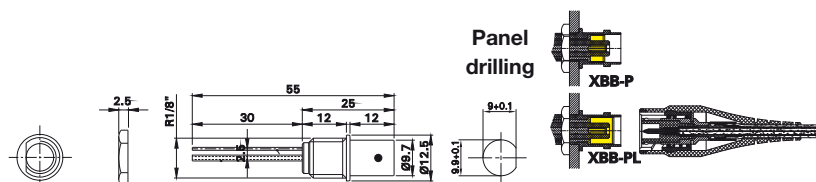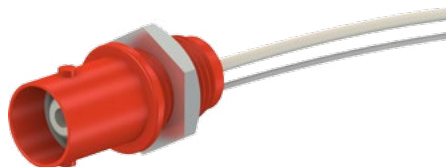

| Order No. | Type | Type of shield | | *Colours |
|-----------|--------|----------------|----------|-------------|
| 67.9765-* | XBB-P | short | Au Ni Ag | 21 22 23 28 |
| 67.9572-* | XBB-PL | long | Au Ni Ag | 21 22 23 28 |

| Technical Data | | |
|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Type | XBB-P | XBB-PL |
| Rated voltage / current | 1000 V, CAT II ¹⁾ (600 V, CAT III) ¹⁾ / 1A 600 V, CAT II ²⁾ (300 V, CAT III) ²⁾ / 1A | 1000 V, CAT II ¹⁾ (600 V, CAT III) ¹⁾ / 1A 600 V, CAT II ²⁾ (300 V, CAT III) ²⁾ / 1A |
| Frequency range | 0 ... 2000 MHz | 0 ... 2000 MHz |
| VSWR (frequency-dependent) Typical values (short connecting wires)! | f = 500 MHz: < 1.2 | f = 500 MHz: < 1.2 |
| Insertion loss (frequency-dependent) Typical values (short connecting wires)! | f = 500 MHz: < 0.2 dB | f = 500 MHz: < 0.2 dB |
| Connection inner conductor | Silver wire, Teflon insulated | Silver wire, Teflon insulated |
| Shield connection | Copper wire, silver-plated | Copper wire, silver-plated |
| Temperature range | +5°C ... +40°C | +5°C ... +40°C |



Assembly instructions MAH 532

www.staubli.com/electrical

¹⁾ For mounting into pre-drilled plastic housings (double insulation) or metal housings³⁾ (basic insulation, with protective conductor)

²⁾ For mounting into pre-drilled metal housings³⁾ (double insulation, without protective conductor)

³⁾ Panel thickness max. 3 mm


XBWB-P

Touch-protected BNC angled socket for mounting on printed-circuit boards, touch-protected according to IEC / EN 61010-1. The socket is directly soldered onto printed-circuit boards. The right-angled configuration minimises the force transmitted to the printed-circuit board through the plugged-in test lead.


The socket has a flat surface which provides sufficient protection from twisting when connecting a BNC cable.

The socket shield consists of two insulated, semi-circular contacts, which are connected to each other when a plug is inserted (switch function). The four locating pins are connected to additional shielding.

The contact socket of the inner conductor of the BNC socket is in gold-plated brass. For use, for example, with high-impedance insulated oscilloscope inputs. The touch-protected BNC socket is compatible with conventional BNC connectors. With such combinations, however, the 1000 V touch protection no longer applies to the whole system.

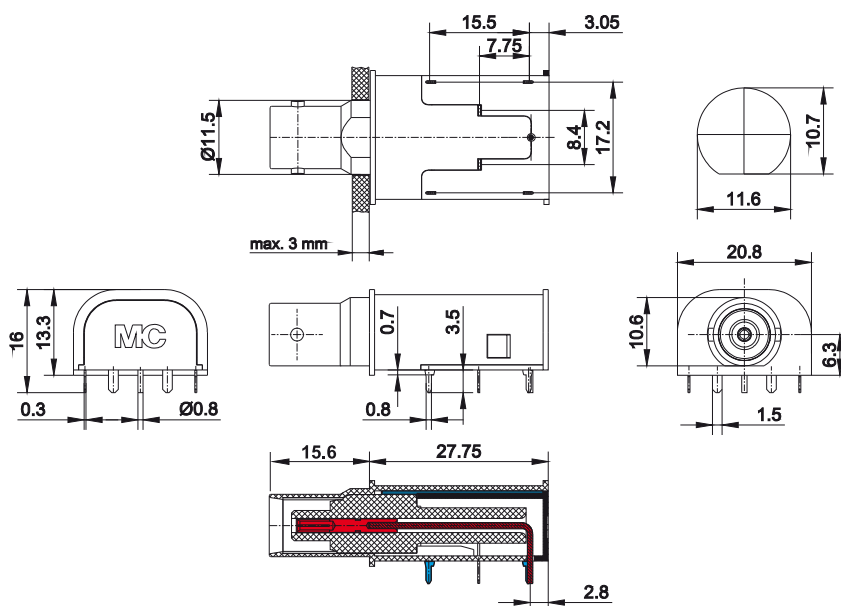

| Order No. | Type | Rated voltage | | *Colours |
|-----------|--------|--------------------------------------|-------|----------|
| 67.9569-* | XBWB-P | Max. 1000 V, CAT III (600 V, CAT IV) | Au Ni | 21 22 |

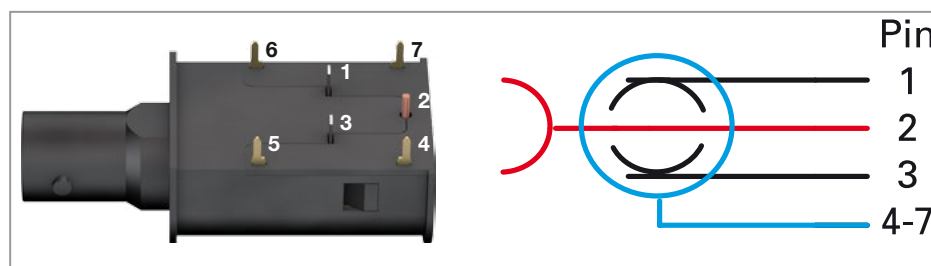

| | |
|------------|------------------------------------------|
| 1 | Outer conductor, semi-circular contact 1 |
| 2 | Inner conductor |
| 3 | Outer conductor, semi-circular contact 2 |
| 4, 5, 6, 7 | Additional shielding |



Assembly instructions MAH 563

www.staubli.com/electrical

XLAM-H200



Highly flexible BNC test lead. One end with two hook clips, other end with touch-

protected BNC male connector (red clip: BNC inner conductor / black clip: shield).



RZ Sheet RZ013

www.staubli.com/electrical

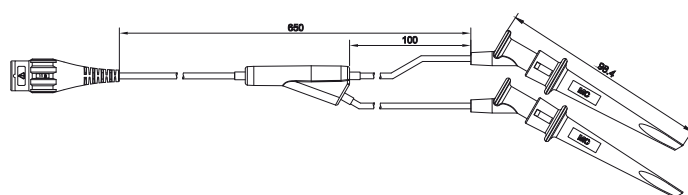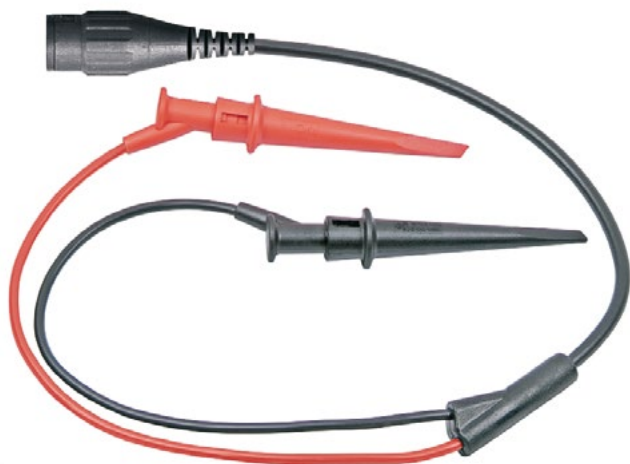


| Order No. | Type | Rated voltage / current | Lead cross section | | Lead lengths [cm] | *Colours |
|-------------|-----------|--------------------------------|---------------------------------|--------|-------------------|----------|
| 67.9424-065 | XLAM-H200 | 600 V, CAT II (300 V, CAT III) | RG174 2x 1.0 mm ² | PVC CE | 065 | |

XLAM-H200

Highly flexible BNC test lead. One end with two hook clips, other end with touch-

protected BNC male connector (red clip: BNC inner conductor / black clip: shield).

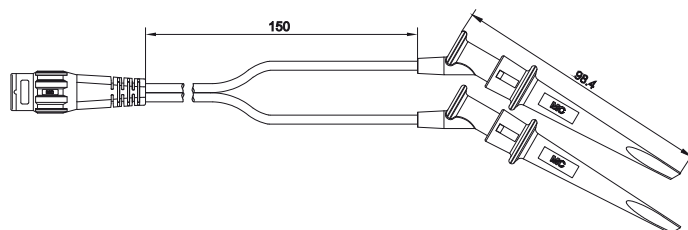


| Order No. | Type | Rated voltage / current | Lead cross section | | Lead lengths [cm] | *Colours |
|-------------|---------|---------------------------------|------------------------|--------|-------------------|----------|
| 67.9419-015 | XBH-200 | 1000 V, CAT II (600 V, CAT III) | 2x 0.5 mm ² | SIL CE | 015 | |


BNC / Ø 4 mm Adapters and Adapter Leads

XM-BB/4 XM-SS/4 XF-BB/4 XF-SS/4


XM-BB/4

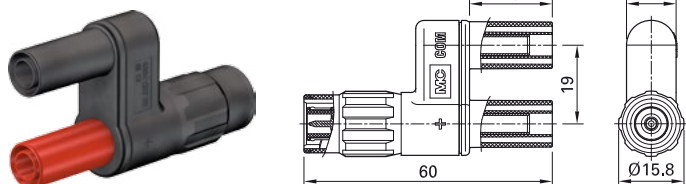


XM-SS/4

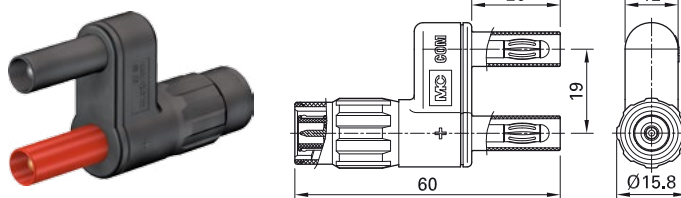

XF-BB/4

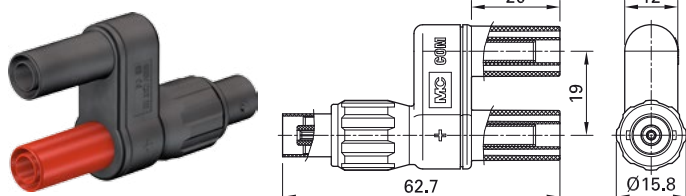

XF-SS/4

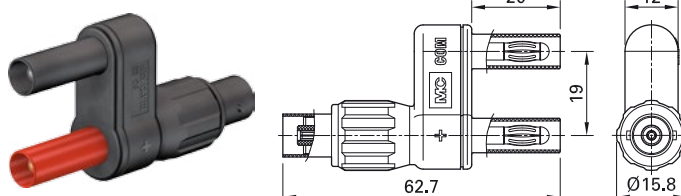

| Order No. | Type | Rated voltage / current | BNC connector | Ø 4 mm connectors | | Colour |
|------------|---------|------------------------------------------|----------------------|-------------------|------------------------|--------|
| 67.9536-21 | XM-BB/4 | 1000 V, CAT II (600 V, CAT III) / 1 A | BNC male connector | Ø 4 mm sockets | Au Ni CE cUL US LISTED | 21 |
| 67.9535-21 | XM-SS/4 | 1000 V, CAT II (600 V, CAT III) / 1 A | BNC male connector | Ø 4 mm plugs | Au Ni CE cUL US LISTED | 21 |
| 67.9538-21 | XF-BB/4 | 1000 V, CAT II (600 V, CAT III) / 1 A | BNC female connector | Ø 4 mm sockets | Au Ni CE cUL US LISTED | 21 |
| 67.9537-21 | XF-SS/4 | 1000 V, CAT II (600 V, CAT III) / 1 A | BNC female connector | Ø 4 mm plugs | Au Ni CE cUL US LISTED | 21 |

XM-B


One-pole adapter with touch-protected BNC male connector linked to a Ø 4 mm rigid socket, accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve.

The contact pin of the BNC plug connector is in gold-plated brass.



RZ Sheet RZ013

www.staubli.com/electrical




| Order No. | Type | Rated voltage / current | | *Colours |
|-----------|------|-----------------------------------------|----------|----------|
| 67.9799-* | XM-B | 600 V, CAT II (300 V, CAT III) / 1 A | Au Ni CE | 21 22 23 |

XLAM-414/SC XLAM-414/SC/SIL

Highly flexible, fully shielded adapter leads. One end with coaxial cable with touch-protected BNC male connector, other end

with in-line Ø 4 mm MULTILAM plugs with rigid insulating sleeve.

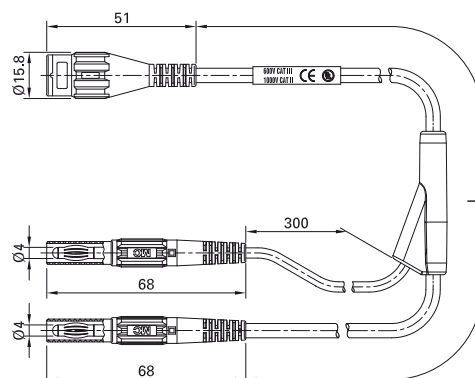



| Order No. | Type | | Lead lengths L [cm] | Colour |
|-----------------------------------|-----------------|----------------------------|---------------------|--------|
| 67.9842- <input type="checkbox"/> | XLAM-414/SC | Au Ni PVC CE cUL US LISTED | 100 160 | |
| 67.9867- <input type="checkbox"/> | XLAM-414/SC/SIL | Au Ni SIL CE cUL US LISTED | 100 160 | |

Technical Data

| Type | XLAM-414/SC | XLAM-414/SC/SIL |
|----------------------------------|---------------------------------------------|---------------------------------------------|
| Rated voltage | 1000 V, CAT II (600 V, CAT III) | 1000 V, CAT II (600 V, CAT III) |
| Capacity (f = 100 kHz) | 100 pF (L = 100 cm) 160 pF (L = 160 cm) | 150 pF (L = 100 cm) 240 pF (L = 160 cm) |
| Inductance (f = 100 kHz) | 750 nH (L = 100 cm) 1000 nH (L = 160 cm) | 750 nH (L = 100 cm) 1000 nH (L = 160 cm) |
| Coaxial lead (Type) / Insulation | RG58 / PVC | SILI-SC 0,5/1,0 / Silicon |
| Temperature range | -10°C ... +70°C | -50°C ... +150°C |

BST-45

Highly flexible adapter lead. One end with touch-protected BNC male connector, other end with stackable Ø 4 mm MULTILAM plugs.

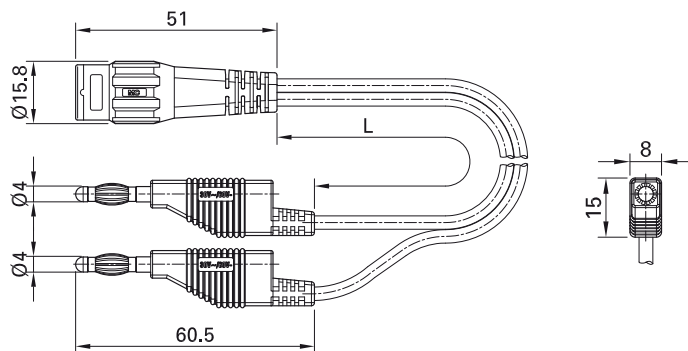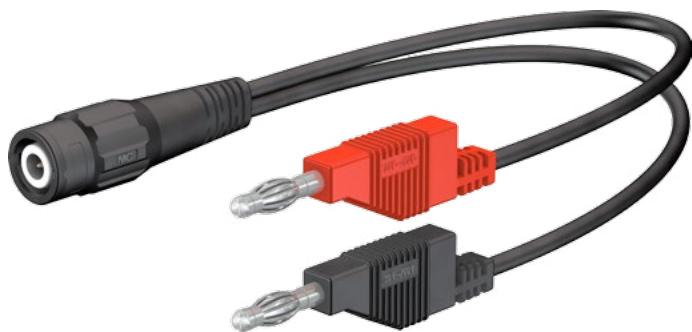


| Order No. | Type | Rated voltage / current | Lead cross section | | Lead lengths [cm] | *Colours |
|-------------|--------|-----------------------------------------|------------------------|-----|-------------------|----------|
| 67.9417-025 | BST-45 | 30 V _{AC} ~ 60 V _{DC} | 2x 0.5 mm ² | SIL | 025 | |

XLAM-446/SC XLAM-446/SC/SIL

Highly flexible, fully shielded adapter leads.
One end with coaxial cable with touch-protected BNC male connector, other end

with stackable Ø 4 mm MULTILAM plugs
with rigid insulating sleeve.

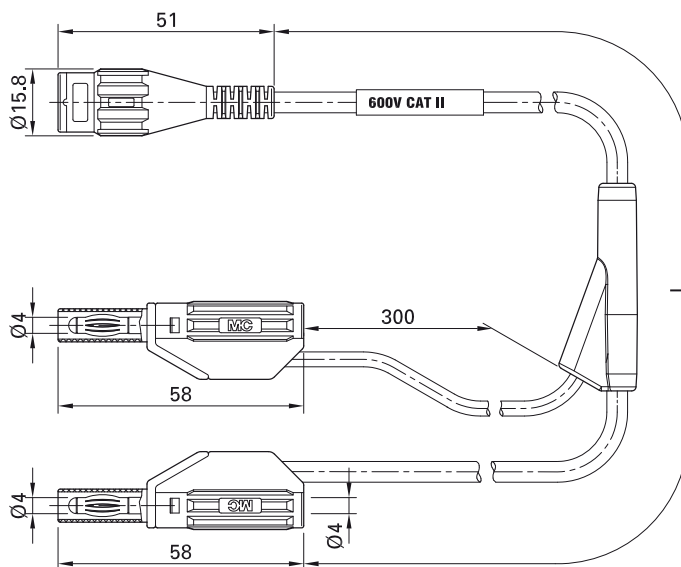


| Order No. | Type | | Lead lengths [cm] | Colour |
|-----------------------------------|-----------------|--------------|-------------------|--------|
| 67.9800- <input type="checkbox"/> | XLAM-446/SC | Au Ni PVC CE | 100 160 | |
| 67.9868- <input type="checkbox"/> | XLAM-446/SC/SIL | Au Ni SIL CE | 100 160 | |

| Technical Data | | |
|----------------------------------|---------------------------------------------|---------------------------------------------|
| Type | XLAM-446/SC | XLAM-446/SC/SIL |
| Rated voltage | 600 V, CAT II (300 V, CAT III) | 600 V, CAT II (300 V, CAT III) |
| Capacity (f = 100 kHz) | 100 pF (L = 100 cm) 160 pF (L = 160 cm) | 150 pF (L = 100 cm) 240 pF (L = 160 cm) |
| Inductance (f = 100 kHz) | 750 nH (L = 100 cm) 1000 nH (L = 160 cm) | 750 nH (L = 100 cm) 1000 nH (L = 160 cm) |
| Coaxial lead (Type) / Insulation | RG58 / PVC | SILI-SC 0,5/1,0 / Silicon |
| Temperature range | -10°C ... +70°C | -50°C ... +150°C |

XDS-BS/58 XDS-BS/SIL

Highly flexible, fully shielded adapter leads. One end with coaxial cable with touch-protected BNC male connector, other end

with Ø 4 mm MULTILAM plugs with rigid insulating sleeve, two-pole version.

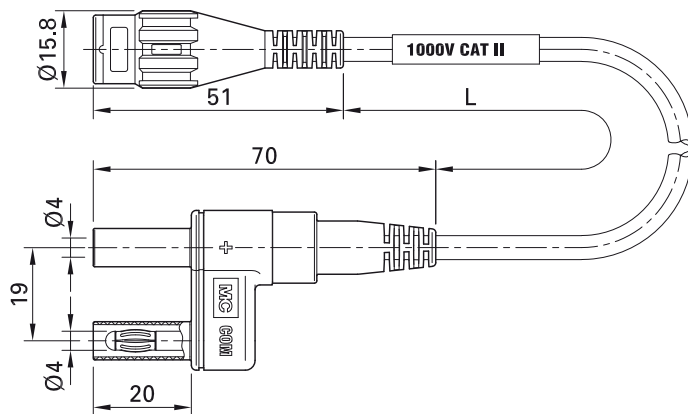

| Order No. | Type | | Lead lengths L [cm] | Colour |
|--------------------------------------|------------|------------------|---------------------|-----------|
| 67.9539- <input type="checkbox"/> 21 | XDS-BS/58 | Au Ni PVC | 100 160 | 21 |
| 67.9540- <input type="checkbox"/> 21 | XDS-BS/SIL | Au Ni SIL | 100 160 | 21 |

| Technical Data | | |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Type | XDS-BS/58 | XDS-BS/SIL |
| Rated voltage | 1000 V, CAT II (600 V, CAT III) | 1000 V, CAT II (600 V, CAT III) |
| Frequency range | ZL ¹⁾ = 1 MΩ 16 pF: DC - 20 MHz (L = 100 cm) 1 MΩ 16 pF: DC - 15 MHz (L = 160 cm) 50 Ω : DC - 100 MHz | ZL ¹⁾ = 1 MΩ 16 pF: DC - 20 MHz (L = 100 cm) 1 MΩ 16 pF: DC - 15 MHz (L = 160 cm) 50 Ω : DC - 100 MHz |
| Capacity (f = 100 kHz) | 105 pF (L = 100 cm) 175 pF (L = 160 cm) | 150 pF (L = 100 cm) 240 pF (L = 160 cm) |
| Inductance (f = 100 kHz) | 500 nH (L = 100 cm) 650 nH (L = 160 cm) | 600 nH (L = 100 cm) 850 nH (L = 160 cm) |
| Coaxial lead (Type) / Insulation | RG58 / PVC | SILI-SC 0,5/1,0 / Silicon |
| Temperature range | -10°C ... +70°C | -50°C ... +150°C |


¹⁾ ZL = Load impedance

BNC / Ø 2 mm Adapters and Adapter Leads

XLAM-205L

Highly flexible adapter lead. One end with co-axial cable with touch-protected BNC male

connector, other end with in-line Ø 2 mm MULTILAM plugs with rigid insulating sleeve.

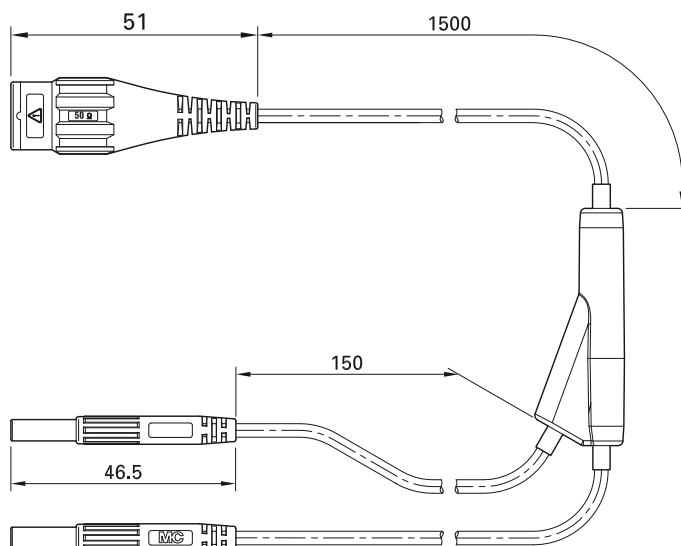

| Order No. | Type | Rated voltage | Wire type | | Lead lengths [cm] |
|-------------|-----------|--------------------------------|---------------------------------|-----|-------------------|
| 67.9565-150 | XLAM-205L | 600 V, CAT II (300 V, CAT III) | RG174 2x 0.5 mm ² | PVC | 150 |



RZ Sheet RZ013


www.staubli.com/electrical

BNC Lead Couplers

XM-M

Lead coupler. The inner conductors and the shields are interconnected. The contact pins

of the inner conductor of the BNC plug connector are in gold-plated brass.

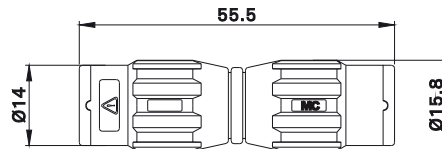

| Order No. | Type | Rated voltage / current | Frequency range | VSWR | | Colour |
|------------|------|--------------------------------------|-----------------|-------|----------|--------|
| 67.9546-28 | XM-M | 600 V, CAT II (300 V, CAT III) / 1 A | DC ... 500 MHz | < 1.3 | Au Ni CE | 28 |




RZ Sheet RZ013

www.staubli.com/electrical

XF-F

Lead coupler. The inner conductors and the shields are interconnected. The contact

sockets of the inner conductor of the BNC plug connector are in gold-plated brass.

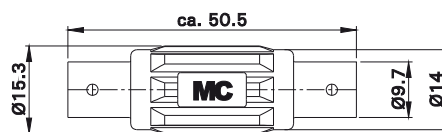

| Order No. | Type | Rated voltage / current | Frequency range | VSWR | | Colour |
|------------|------|---------------------------------------|-----------------|-------|----------|--------|
| 67.9547-28 | XF-F | 1000 V, CAT II (600 V, CAT III) / 1 A | DC ... 500 MHz | < 1.3 | Au Ni CE | 28 |



RZ Sheet RZ014



www.staubli.com/electrical

BNC Signal Distributors

XM-MM

Signal distributor with three BNC safety connectors. All inner conductors and all shields are interconnected. The contact pins of the

inner conductor of the BNC plug connector are in gold-plated brass.

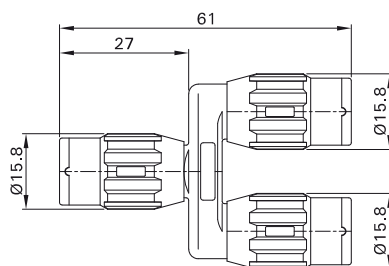

| Order No. | Type | Rated voltage / current | Frequency range | VSWR | | Colour |
|------------|-------|--------------------------------------|-----------------|------|----------|--------|
| 67.9782-21 | XM-MM | 600 V, CAT II (300 V, CAT III) / 1 A | - | - | Au Ni CE | 21 |





RZ Sheet RZ013

www.staubli.com/electrical

XM-FF

Signal distributor with three BNC safety connectors. All inner conductors and all shields are interconnected. The contact pins and

sockets of the inner conductor of the BNC plug connector are in gold-plated brass.

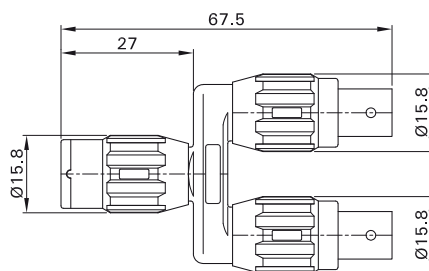

| Order No. | Type | Rated voltage / current | Frequency range | VSWR | | Colour |
|------------|-------|--------------------------------------|-----------------|------|----------|--------|
| 67.9783-21 | XM-FF | 600 V, CAT II (300 V, CAT III) / 1 A | - | - | Au Ni CE | 21 |




RZ Sheet RZ013

www.staubli.com/electrical

Touch-protected Adapters and Converters

Touch-protected adapters and converters with various functions in high-frequency technology. The BNC plug connectors allow these elements to be easily inserted, e.g. by direct plugging into an oscilloscope input

socket or as intermediate elements in BNC leads. The contact pins and sockets of the inner conductor of the BNC plug connector are in gold-plated brass.

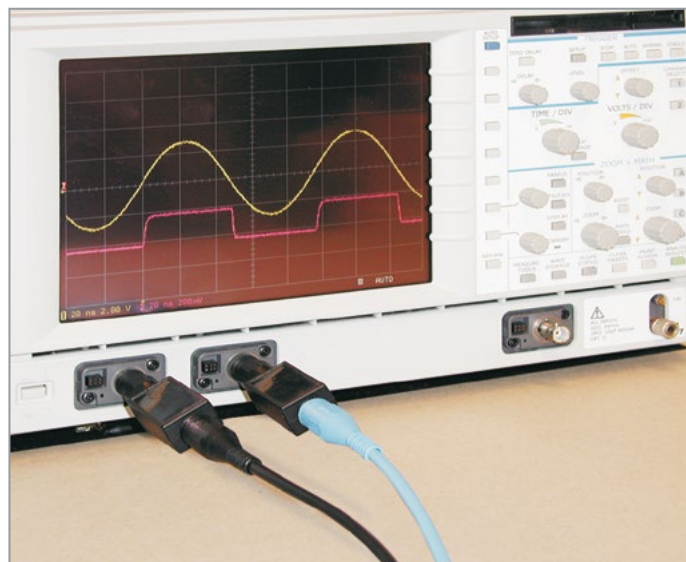


BNC Box XBKS

Touch-protected empty BNC box for individual applications. The components in the box are connected by soldering. The BNC plug connectors allow these housings to be

easily inserted, e.g. by direct plugging into an oscilloscope input socket or as intermediate elements in BNC leads. The contact pins and sockets of the inner conductor of

the BNC plug connector are in gold-plated brass.

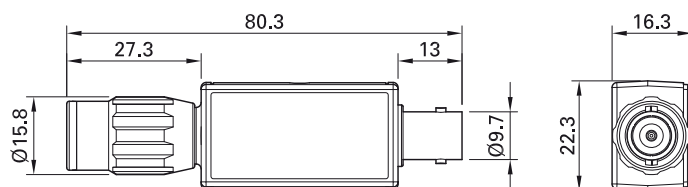


| Order No. | Type | Rated voltage | Colour |
|-----------|------|----------------------------------|--------|
| 67.9428 | XBKS | Max. 300 V, CAT II ¹⁾ | |

¹⁾ Dependent on the component inserted.

XFT-50 XFT-75

Lead terminations with signal lead-through.

50 Ω - or 75 Ω lead terminations for the suppression of reflections. At the same time these permit high-impedance tapping of the signal.

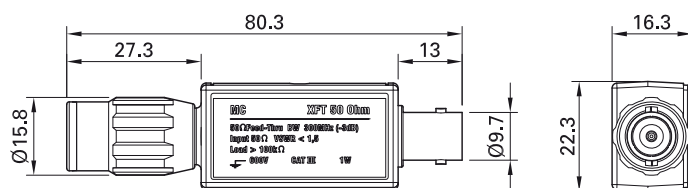

| Order No. | Type | Input resistance | | Colour |
|------------|--------|------------------|----------|--------|
| 68.9898-21 | XFT-50 | 50 Ω | Au Ni CE | 21 |
| 68.9882-21 | XFT-75 | 75 Ω | Au Ni CE | 21 |


Technical Data

| Type | XFT-50 | XFT-75 |
|-----------------------------------------------|----------------|----------------|
| Rated voltage | 600 V, CAT III | 600 V, CAT III |
| Frequency range | 0 ... 300 MHz | 0 ... 150 MHz |
| VSWR (frequency-dependent) Typical values! | | |
| Max. input power | 1 W | 1 W |
| Input resistance | 50 Ω ± 1 % | 75 Ω ± 1 % |

XIW-1 XIW-2

Impedance transformers

Impedance transformers with broad-band transforming capacity for reflection-free interconnection of 50 Ω- and 75 Ω systems.

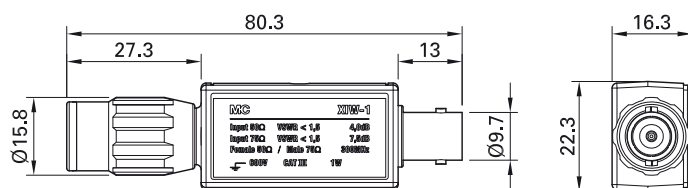

| Order No. | Type | Input resistances | | Colour |
|------------|-------|--------------------------------|----------|--------|
| 68.9884-21 | XIW-1 | 75 Ω (male) / 50 Ω (female) | Au Ni CE | 21 |
| 68.9885-21 | XIW-2 | 50 Ω (male) / 75 Ω (female) | Au Ni CE | 21 |

Technical Data


| Type | XIW-1 | XIW-2 |
|-------------------------|--------------------------------------------|--------------------------------------------|
| Rated voltage | 600 V, CAT III | 600 V, CAT III |
| Frequency range | 0 ... 300 MHz | 0 ... 300 MHz |
| VSWR 50 | < 1.5 | < 1.5 |
| VSWR 75 | < 1.5 | < 1.5 |
| Max. input power | 1 W | 1 W |
| Input resistances | 75 Ω ± 1 % (male) / 50 Ω ± 1 % (female) | 50 Ω ± 1 % (male) / 75 Ω ± 1 % (female) |
| Attenuation 50 Ω → 75 Ω | 4 dB | 4 dB |
| Attenuation 75 Ω → 50 Ω | 7.5 dB | 7.5 dB |

XDG-3 XDG-6 XDG-10 XDG-20

Attenuators

Symmetrical attenuators on a 50 Ω basis for adaptation of signal levels. Particularly suited for situations that also place heavy

demands on the insulation of ground leads. Various attenuation values available.

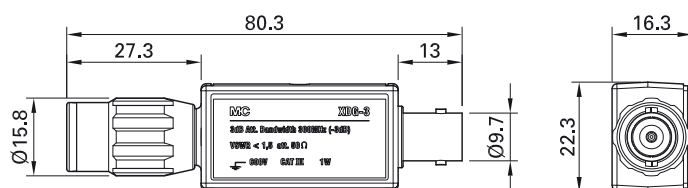

| Order No. | Type | Attenuation | | Colour |
|------------|--------|-------------|----------|--------|
| 68.9886-21 | XDG-3 | 3 dB | Au Ni CE | 21 |
| 68.9887-21 | XDG-6 | 6 dB | Au Ni CE | 21 |
| 68.9888-21 | XDG-10 | 10 dB | Au Ni CE | 21 |
| 68.9889-21 | XDG-20 | 20 dB | Au Ni CE | 21 |

| Technical Data | | | | |
|------------------------|----------------|----------------|----------------|----------------|
| Type | XDG-3 | XDG-6 | XDG-10 | XDG-20 |
| Rated voltage | 600 V, CAT III | 600 V, CAT III | 600 V, CAT III | 600 V, CAT III |
| Frequency range | 0 ... 300 MHz | 0 ... 300 MHz | 0 ... 300 MHz | 0 ... 300 MHz |
| Max. input power | 1 W | 1 W | 1 W | 1 W |
| Input resistance | 50 Ω ± 1 % | 50 Ω ± 1 % | 50 Ω ± 1 % | 50 Ω ± 1 % |
| VSWR | < 1.5 | < 1.5 | < 1.5 | < 1.5 |
| Attenuation | 3 dB | 6 dB | 10 dB | 20 dB |
| Accuracy (f = 150 MHz) | ± 0.2 dB | ± 0.2 dB | ± 0.3 dB | ± 0.3 dB |
| Accuracy (f = 300 MHz) | ± 0.4 dB | ± 0.4 dB | ± 0.5 dB | ± 0.5 dB |


XFA-10:1/2 XFA-10:1/3 XFA-10:1/4 XFA-10:1

Safety high voltage dividers

Touch-protected 10:1 voltage divider. The voltage dividers are used to attenuate the test signal when simple test probes are

used. This combination is an economical solution that is of special interest to training establishments.

Notice! When using these voltage dividers within mains circuits we recommend the use of test equipment with insulated input sockets.

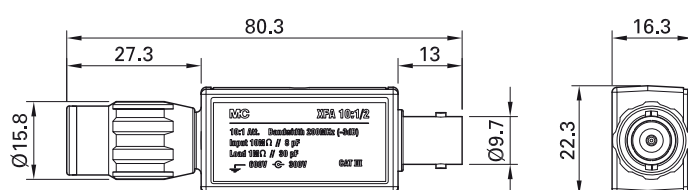

| Order No. | Type | | Colour |
|------------|------------|----------|--------|
| 68.9895-21 | XFA-10:1/2 | Au Ni CE | 21 |
| 68.9896-21 | XFA-10:1/3 | Au Ni CE | 21 |
| 68.9897-21 | XFA-10:1/4 | Au Ni CE | 21 |
| 68.9837-21 | XFA-10:1 | Au Ni CE | 21 |

| Technical Data | | | | |
|-------------------------------|--------------------|---------------|---------------|-------------------|
| Type | XFA-10:1/2 | XFA-10:1/3 | XFA-10:1/4 | XFA-10:1 |
| Rated voltage | Max. 300 V, CAT II | | | 300 V, CAT II |
| | | | | |
| Frequency range | 0 ... 200 MHz | 0 ... 200 MHz | 0 ... 200 MHz | 0 ... 4 kHz ± 5 % |
| Dividing ratio | 10:1 | 10:1 | 10:1 | 10:1 |
| Input capacitance | 8 ± 1 pF | 7.5 ± 1 pF | 7.7 ± 1 pF | 3.5 pF ± 1 pF |
| Input resistance | 10 MΩ ± 1 % | 10 MΩ ± 1 % | 10 MΩ ± 1 % | 10 MΩ ± 1 % |
| Nominal scope input impedance | 1 MΩ 30 pF | 1 MΩ 25 pF | 1 MΩ 15 pF | 1 MΩ 30 pF |


XOP-230

Overvoltage protection

Protects voltage-sensitive measuring instruments from excessive voltages. Up to a threshold of approx. 230 V, the component

remains quiescent with a dividing ratio of approximately 1:1. If the input voltage exceeds a level of 230 V, the surge diversion

becomes active and the residual voltage at the output is approx. 100 V.

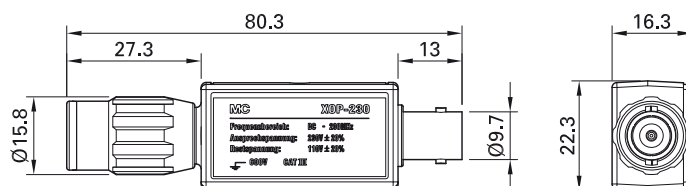

| Order No. | Type | | Colour |
|------------|---------|----------|--------|
| 68.9883-21 | XOP-230 | Au Ni CE | 21 |

| Technical Data | |
|--------------------------------------|----------------------------------------------------|
| Type | XOP-230 |
| Rated voltage | 300 V, CAT II |
| Frequency range | 0 ... 200 MHz |
| Dividing ratio | 1:1 |
| Input capacitance | Input capacitance of measuring instrument + ~ 4 pF |
| Input resistance | Input resistance of measuring instrument |
| Threshold voltage | 230 V ± 20 % |
| Nominal oscilloscope input impedance | 25 pF |

Technical Information

The casings of mains-powered oscilloscopes can become live with dangerous voltages, if, for instance, the protective conductor is interrupted. Persons carrying out measurements then run the risk of an electric shock on touching bare metal parts. In such cases, adequate protection from accidents is assured only with the use of touch-protected test equipment in association with touch-protected test accessories.

Touch-protected and at the same time shielded test accessories are also of in-

creasing importance because the EMC directive prescribes shielded leads for many applications.


For safe use in the high-frequency range, our passive oscilloscope probes of the Isoprobe series and the push-on accessories are rated for voltages to earth of up to max. 1000 V, CAT II, (Isoprobe II) resp. 1000 V, CAT III / 600 V, CAT IV (Isoprobe III) and are designed with clearance and creepage distances in accordance with the strict requirements of IEC / EN 61010-031.

The probes Isoprobe and their push-on accessories are designed for voltages up to a maximum of 1000 V_{r.m.s.} between the internal conductor and shield – substantially higher than in conventional oscilloscope probes. This high dielectric strength allows high-frequency signals to be measured even when there is a direct mains connection.

In addition to our probes Isoprobe and the push-on accessories, with our BNC safety plug connectors we also supply a high-quality touch-protected BNC plug connection system to complete our safety high-frequency programme that is rated for voltages up to 1000 V, CAT II to earth and meets also the requirements of IEC / EN 61010-031.

This tried and tested BNC plug connector system has a long life of approximately 5000 connecting cycles. The shielded BNC test leads are highly flexible and are available with PVC and silicone insulation in a choice of colours.

All touch-protected BNC plug connectors are compatible with conventional BNC connectors. With such combinations, however, the 1000 V touch protection no longer applies to the whole system.

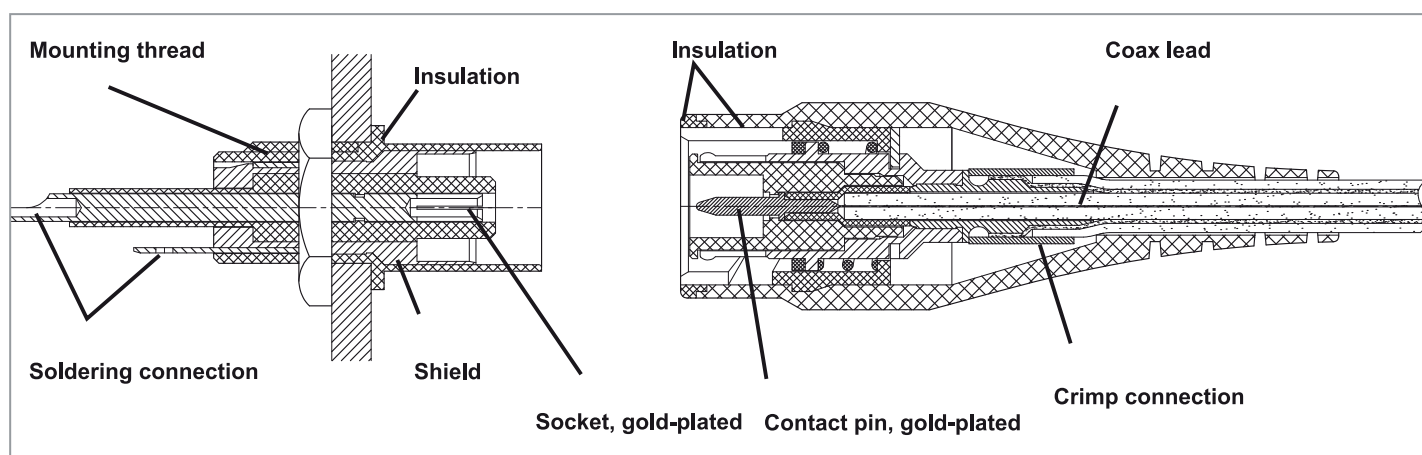


Test leads with touch-protected BNC plugs can be connected to devices with insulated and conventional BNC sockets.


As a result of the capacitive coupling between the shield and the "world outside" (e.g. a person touching the probe) the rated voltage shield/ground is frequency-dependent. As the frequency rises, the rated voltage falls until it approaches a lower

limit (left curve). The rated voltage inner conductor/shield falls exponentially with rising frequencies as a result of the capacitive properties of the probe and the limitation of the current due to the characteristics of the components (middle curve). The over-


all result is a fall in the rated voltage in accordance with the curve on the right. The curves in this example are for the test probe Isoprobe II - ECO.

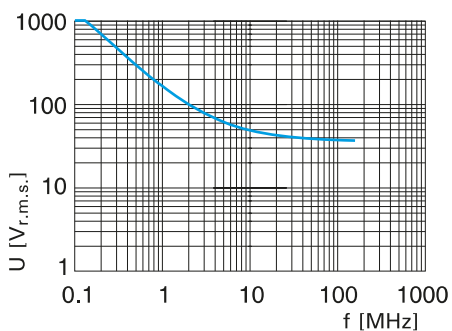

Voltage shield / earth

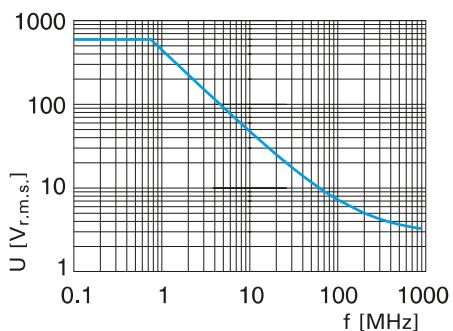

Voltage inner conductor / shield

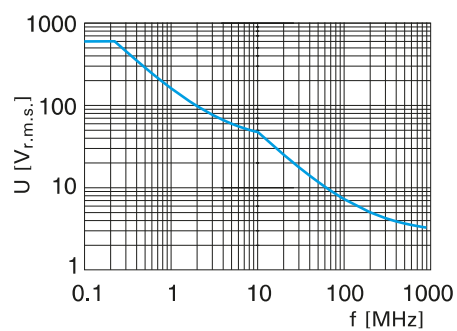

Rated voltage

Probes – essential equipment for oscilloscopes

The oscilloscope is one of the most important test instruments in electronics. Constant development has substantially enhanced the performance of these devices and expanded their range of applications. In order to display a test signal on these

instruments, an electrical connection must be established between the oscilloscope and the object under test. The aim in establishing such a connection is to transmit the signal from the point of measurement to the oscilloscope with a minimum of dis-

tortion. Here, various factors must be taken into consideration which call for the use of special probes. Probe systems are broadly classified into passive and active types.

Test conditions

Input impedance

Every oscilloscope has an input impedance which may be high or low [50 Ω]. In the case of a high-impedance oscilloscope, the input impedance consists of a real component, generally 1 M Ω , and a capacitive component of around 8 - 30 pF.

Vertical scaling

The maximum vertical scaling of an oscilloscope is usually 10 V/div, which means that a maximum amplitude of 80 V_{ss} can be displayed. For the measurement of larger voltage amplitudes, a voltage divider is required.

Practicability

In electrical testing it is often necessary to quickly tap off signals from different points. In this situation, time-consuming plugged, soldered or screwed connections are not practicable.

Outside interference


In order to eliminate outside interference, the system consisting of the probe and lead must be of coaxial design.

Principle of a passive, high-impedance probe

The example shows a probe with a dividing ratio of 10:1. This enables signals up to $800 V_{SS}$ to be visualised. As a result of the capacitive component of the scope's input

impedance and the capacity of the coaxial lead, it has the draw-back of a frequency dependence which must be compensated (C_v and C_{komp}). The input impedance of

the probe is thus $10 M\Omega \parallel C_{in}$. In probes of this type a typical value for C_{in} is around 10 - 15 pF (including stray capacities).

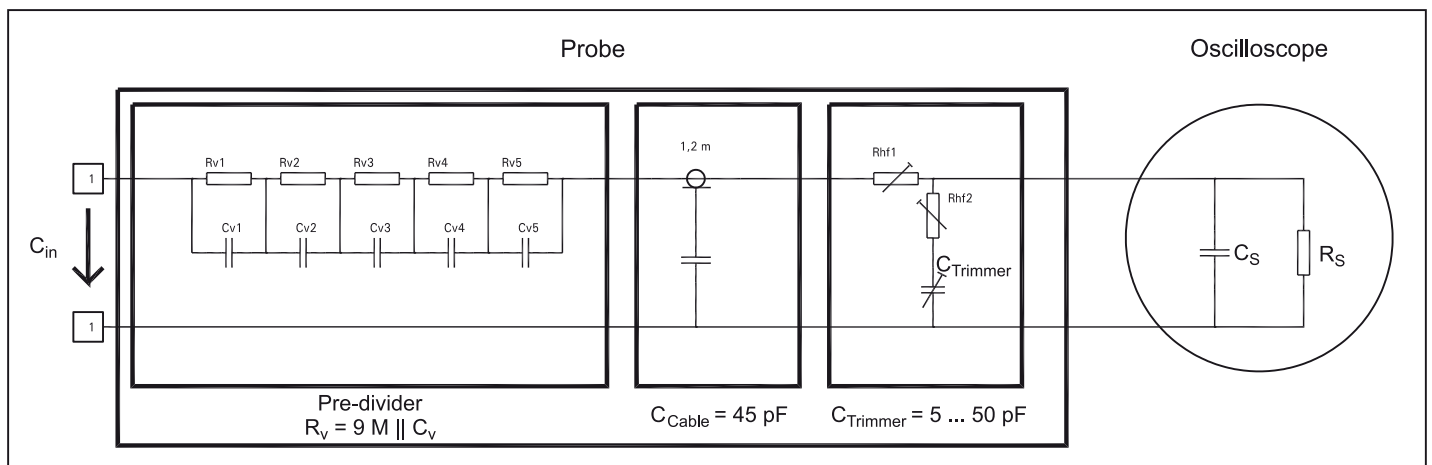

Schematic diagram of a passive 10:1 test probe

Limits to the use of passive probes

Today there are many suppliers of passive probes with bandwidths of up to 500 MHz. When using these probes at frequencies above 20 MHz, however, one should bear in mind the influence exerted on the test object by their input impedance.

At a frequency of 100 MHz, the passive probe shown in the example has an impedance of only 100 - 150 Ω . This already causes distortion of a signal from a 50 Ω -source. In order to reduce this distortion, the capacities of the coaxial lead and the scope

must be reduced. This is virtually impossible. However, there is another solution: an impedance converter needs to be installed directly after the divider in order to decouple it from the following components. In this situation an active probe may be a help.

Index

| Type | Page |
|-------------------------------|--------|
| AB200 | 39 |
| AC200 | 37 |
| BA400 | 11 |
| BST-45 | 53 |
| GB200 | 40 |
| GB284 | 40 |
| GH200 | 39 |
| GH284 | 39 |
| GM200 | 40 |
| GM200-F | 40 |
| GM284 | 40 |
| GM400 | 11 |
| GS400 | 11, 38 |
| HC200 | 37 |
| HC400 | 11 |
| Isoprobe II – 1:1 | 12 |
| Isoprobe II – 10:1 – 2,5 | 20 |
| Isoprobe II – 10:1 ECO | 14 |
| Isoprobe II – 10:1 HF | 16 |
| Isoprobe II – 10:1 HS | 18 |
| Isoprobe II – 100:1 | 22 |
| Isoprobe III – 10:1 – 2,5 | 30 |
| Isoprobe III – 10:1 ECO | 24 |
| Isoprobe III – 10:1 HF | 26 |
| Isoprobe III – 10:1 HS | 28 |
| Isoprobe III – 100:1 | 32 |
| Isoprobe III – HP | 35 |
| Isoprobe IV - 10:1 | 8 |
| Isoprobe IV – 100:1 | 9 |
| PB200 | 38 |
| PT200 | 38 |
| SCC | 40 |
| SET Isoprobe II - 1:1 | 13 |
| SET Isoprobe II – 10:1 – 2,5 | 21 |
| SET Isoprobe II – 10:1 ECO | 15 |
| SET Isoprobe II – 10:1 HF | 17 |
| SET Isoprobe II – 10:1 HS | 19 |
| SET Isoprobe II – 100:1 | 23 |
| SET Isoprobe III – 10:1 – 2,5 | 31 |
| SET Isoprobe III – 10:1 ECO | 25 |
| SET Isoprobe III – 10:1 HF | 27 |
| SET Isoprobe III – 10:1 HS | 29 |
| SET Isoprobe III – 100:1 | 33 |
| SET Isoprobe III – HP | 36 |

| Type | Page |
|-------------------------|------|
| SET Isoprobe IV – 10:1 | 10 |
| SET Isoprobe IV – 100:1 | 10 |
| SK-IP | 39 |
| XBB-C58 | 46 |
| XBB-L | 47 |
| XBB-LL | 47 |
| XBB-P | 48 |
| XBB-PL | 48 |
| XBH-200 | 50 |
| XBK-58 | 45 |
| XBKS | 59 |
| XBS-58 | 45 |
| XBWB-P | 49 |
| XDG-3 | 62 |
| XDG-6 | 62 |
| XDG-10 | 62 |
| XDG-20 | 62 |
| XDS-BS/58 | 55 |
| XDS-BS/SIL | 55 |
| XFA-10:1 | 63 |
| XFA-10:1/2 | 63 |
| XFA-10:1/3 | 63 |
| XFA-10:1/4 | 63 |
| XF-BB/4 | 51 |
| XF-F | 57 |
| XF-SS/4 | 51 |
| XFT-50 | 60 |
| XFT-75 | 60 |
| XIW-1 | 61 |
| XIW-2 | 61 |
| XLAM-205L | 56 |
| XLAM-414/SC | 52 |
| XLAM-414/SC/SIL | 52 |
| XLAM-446/SC | 54 |
| XLAM-446/SC/SIL | 54 |
| XLAM-H200 | 50 |
| XLSK-58 | 41 |
| XLSS-58 | 41 |
| XLSS-174 | 42 |
| XLSS/SIL | 43 |
| XLWW-58 | 44 |
| XLWW/SIL | 44 |
| XM-B | 51 |
| XM-BB/4 | 51 |

| Type | Page |
|---------|------|
| XM-FF | 58 |
| XM-M | 57 |
| XM-MM | 58 |
| XM-SS/4 | 51 |
| XOP-230 | 64 |
| XTBA | 38 |
| ZGA | 37 |
| ZGA-S | 37 |



■ Stäubli Units ○ Agents

Global presence of the Stäubli Group

www.staubli.com/contacts

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [STAUBLI](#) manufacturer:

Other Similar products are found below :

[795-2384-10-25](#) [1301430020](#) [1510-24-105](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1927617](#) [2450](#) [2524-A-60](#) [LB1F-2R-RED](#)
[LB1F-2R-YLW](#) [2500](#) [2524-A-48](#) [2977-J-48](#) [380200](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#)
[LB1F-2R-BLUE](#) [LB1F-2R-WHT](#) [6345](#) [6432](#) [6416](#) [EM3782-24-3#](#) [R948161002](#) [R948160002](#) [R948170002](#) [R948171002](#) [R948163002](#)
[973604100](#) [934160101](#) [934160100](#) [R948174000](#) [CT3269](#) [CT3258](#) [CT3158-100](#) [HSPL 8568/AWG16/200/RT](#) [HSPL 8568/AWG16/200/SW](#)
[28.0119-10020](#) [28.0127-05025](#) [28.0127-20025](#) [49.0079-20021](#) [49.0079-20024](#) [28.0126-05020](#) [28.0126-10027](#) [0590 0011](#) [66.9407-05028](#)
[66.9407-20027](#)