

FUSEHOLDER BLOCKS FOR P.C.B.
PORTAFUSIBILI NON PROTETTI PER C.S.

PTF/18 THR



Fuse link / Fusibile tipo	5x20 mm
Mounting / Montaggio	C.S. / P.C.B.
Rated Current / Corrente nominale	10 A
Rated Voltage / Tensione nominale	250 VAC
Rated Power Acceptance / Potenza dissipabile	2,5 W - 4 W Pending


Housing / Corpo isolante	Thermoplastic UL 94V-0
Admissible ambient air temperature / Temperatura ambiente ammissibile	-30 °C to 85 °C
Shocksafe category / Protezione contro le scosse elettriche	PC1
Degree of protection / Grado di protezione	IP00 / IP20
Contact Resistance / Resistenza di contatto	< 5 mΩ

EN 60127-6

UL 512 + C22.2 no. 39

Rated Current / Corrente Nominale	10 A	Rated Current / Corrente Nominale	10 A
Rated Voltage / Tensione nominale	250 VAC	Rated Voltage / Tensione nominale	250 VAC
Rated Power Acceptance / Potenza dissipabile	2,5 W - 4 W Pending	Rated Power Acceptance / Potenza dissipabile	---

Standard colour / Colore standard	Black / Nero
Other colours / Altri colori	---
Accessories / Accessori	Cover / Cappuccio BS613 p. 30
Other information / Altri dati	p. 33
Standard package / Imballo	Bulk / Scatola 1000 pcs T&R Ø380 mm - 300 pcs

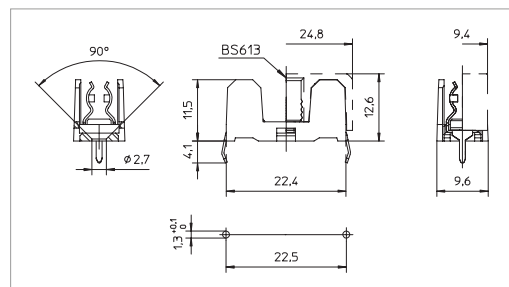

FUSEHOLDER BLOCKS FOR P.C.B.
PORTAFUSIBILI NON PROTETTI PER C.S.

PTF/18 SMD



Fuse link / Fusibile tipo	5x20 mm
Mounting / Montaggio	C.S. / P.C.B.
Rated Current / Corrente nominale	10 A
Rated Voltage / Tensione nominale	250 VAC
Rated Power Acceptance / Potenza dissipabile	2,5 W - 4 W Pending


Housing / Corpo isolante	Thermoplastic UL 94V-0
Admissible ambient air temperature / Temperatura ambiente ammissibile	-30 °C to 85 °C
Shocksafe category / Protezione contro le scosse elettriche	PC1
Degree of protection / Grado di protezione	IP00 / IP20
Contact Resistance / Resistenza di contatto	< 5 mΩ

EN 60127-6

UL 512 + C22.2 no. 39

Rated Current / Corrente Nominale	10 A	Rated Current / Corrente Nominale	10 A
Rated Voltage / Tensione nominale	250 VAC	Rated Voltage / Tensione nominale	250 VAC
Rated Power Acceptance / Potenza dissipabile	2,5 W - 4 W Pending	Rated Power Acceptance / Potenza dissipabile	---

Standard colour / Colore standard	black / nero
Other colours / Altri colori	---
Accessories / Accessori	Cover / Cappuccio BS613 p. 30
Other information / Altri dati	p. 33
Standard package / Imballo	Bulk / Scatola 1000 pcs T&R Ø380 mm - 400 pcs

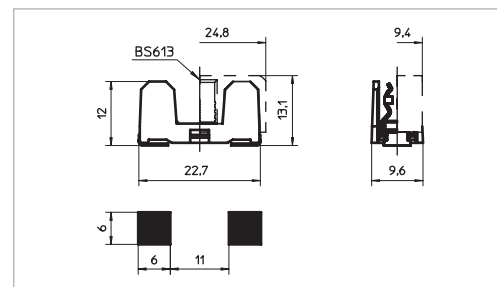

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Stelvio Kontek](#) manufacturer:

Other Similar products are found below :

[0031.1351.01](#) [6R30A1B](#) [6SC30A2IC](#) [F30A3S](#) [F600A3B](#) [80910030](#) [80910080](#) [9-3557-GP REV A](#) [HFH-1](#) [RF30A1S](#) [RF30A2B](#) [RF30A3SP](#)
[15602-04-08-21](#) [HTJ-LES-FUSE](#) [RTMF-SC](#) [2602](#) [2650](#) [178.000100](#) [F60A2SQ](#) [T30A2B](#) [G4PB8](#) [2660](#) [HKP-CCHH](#) [R6F30A2S](#) [341001A](#)
[345621A](#) [348670](#) [CVRMCC](#) [4202](#) [4408](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [HPC](#) [55900008011](#) [345602-010](#) [345603-010](#) [345612](#) [345903A](#)
[3578](#) [3833-5](#) [3833-7](#) [3992](#) [4393](#) [4409](#) [4522](#) [4574](#) [02800031Z](#) [ESFH04/HTCC35M](#)