

## NFC Forum Type 4 Tag IC demonstration board

Data brief

### Features

- Ready-to-use printed circuit board with
  - ST25TA02KB-P NFC/RFID Tag in UDFPN5 ECOPACK<sup>®</sup>2 package
  - 19 mm<sup>2</sup> single layer inductive antenna, etched on the PCB
- Contactless interface
  - TruST25<sup>™</sup> digital signature
  - NFC Forum Type 4 Tag
  - ISO/IEC 14443 Type A
  - 106 kbps data rate
  - Internal 50 pF tuning capacitance, enabling design of small inductive antennas
- Memory
  - 256 Byte (2 Kbit) EEPROM with NDEF data support
  - 200-year data retention
  - 1 million erase-write cycles endurance
  - 128-bit password data protection
  - 20-bit event counter for read or write access with anti-tearing feature
- Digital pad
  - Configurable general purpose output (GPO) indicating, for example, RF field detection

Figure 1. CLOUD-ST25TA02KB board (top view)



# 1 Description


The CLOUD-ST25TA02KB is a ready-to-use demonstration board intended to evaluate the ST25TA02KB-P device.

The ST25TA02KB-P is a dynamic NFC/RFID tag IC with a digital General Purpose Output (GPO), embedding a 2 Kbit EEPROM that supports NDEF tag applications for NFC Forum Type 4.

The device communicates using the ISO/IEC 14443 Type A protocol, and is fully powered by the RF field. When the GPO output is used, an external reference voltage is required to set the high level voltage of the GPO signal to be directly compatible with the I/O voltage of the MCU or Host, without the need for any level shifter.

The GPO signal is active High when asserted, and can be used as a rising edge interrupt. It may be configured through the RF interface for various uses, like indicating Field Detection (by default) to wake-up an MCU, or Host like a Bluetooth® or a Wi-Fi® chipset.

Figure 2. Functional block diagram

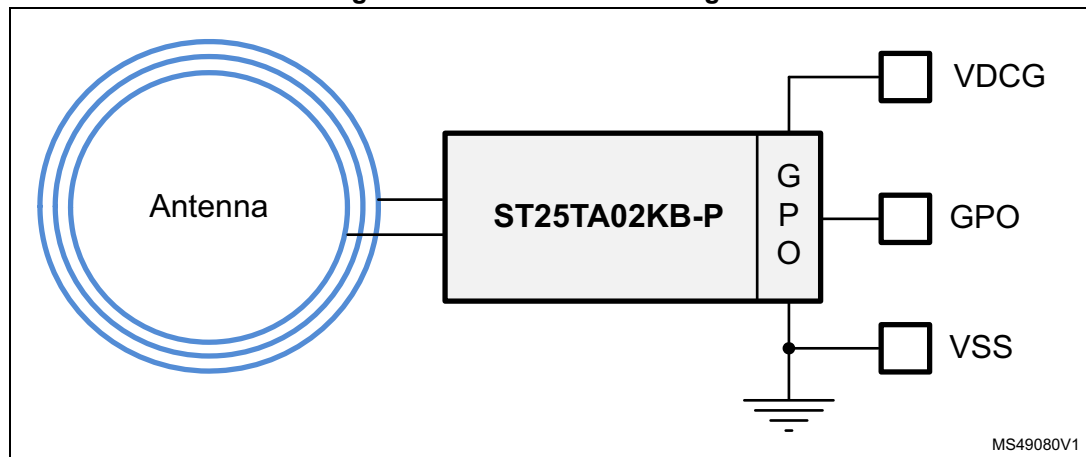

## 2 Revision history

Table 1. Document revision history

Date	Revision	Changes
15-Jan-2018	1	Initial release.

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RFID Transponder Tools](#) category:*

*Click to view products by [STMicroelectronics](#) manufacturer:*

Other Similar products are found below :

[SP-MX-08-HF-M2](#) [V700-A43 10M](#) [WF-SM-30](#) [V700-A44 20M](#) [V680-A81](#) [V680-A60 2M](#) [WS02-CFSC1-EV3](#) [V680-A60 5M](#) [V680-HAM91](#) [V680-A60 10M](#) [V700-A46 50M](#) [V680S-HMD66-ETN](#) [MEDP-MF-RFID-R10](#) [ST25-TAG-BAG-U](#) [MIKROE-3644](#) [MIKROE-2395](#) [1482](#) [MIKROE-2462](#) [2800](#) [2802](#) [X-NUCLEO-NFC05A1](#) [359](#) [360](#) [361](#) [362](#) [363](#) [365](#) [3781](#) [789](#) [884](#) [4032](#) [4034](#) [4043](#) [4429](#) [4701](#) [AS3980-QF\\_DK\\_ST](#) [AS3930](#) [DEMOSYSTEM](#) [AS3953-DK-TAGS](#) [ATARFID-EK1](#) [ATARFID-EK2](#) [EVB90109](#) [MIKROE-3659](#) [MIKROE-3971](#) [MIKROE-4208](#) [MIKROE-1434](#) [MIKROE-1475](#) [MIKROE-1726](#) [MIKROE-262](#) [MIKROE-4309](#) [13429-6001](#)