
ECMF02-2BF3



Dual line IPAD™, common mode filter with ESD protection for high speed serial interface

Datasheet - production data

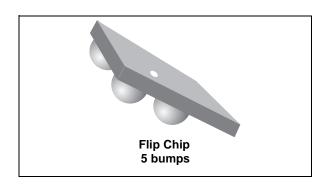

Features

- Very large differential bandwidth above 5 GHz
- · High common mode attenuation:
 - 23 dB at 900 MHz.
- High common mode attenuation:
 - - 20 dB between 800 MHz and 2.2 GHz.
- Very low PCB space consumption: <1.1mm²
- Thin package: 0.50 mm max. after reflow
- Lead-free package
- High reduction of parasitic elements through integration

Complies with the following standard:

- IEC 61000-4-2 level 4 input and output pins:
 - ±15 kV (air discharge)
 - ±8 kV (contact discharge)

Application

 $\begin{array}{l} \mbox{High speed serial interfaces such as USB 2.0,} \\ \mbox{MIPI D-PHY, MDDI and HDMI.} \end{array}$

Description

The ECMF02-2BF3 is a highly integrated common mode filter designed to suppress EMI/RFI common mode noise on high speed differential serial buses like MIPI D-PHY, MDDI, USB 2.0 and HDMI.

The ECMF02-2BF3 can protect and filter one differential lane.

Figure 1. Pin configuration (bump side)


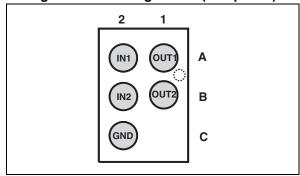


Figure 2. Schematic

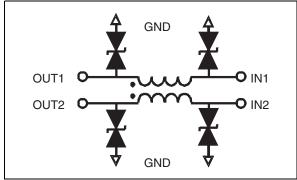

TM: IPAD is a trademark of STMicroelectronics.

Characteristics ECMF02-2BF3

1 Characteristics

Table 1. Absolute maximum ratings ($T_{amb} = 25$ °C)

	- Cumb				
Symbol		Value	Unit		
V _{PP}	Peak pulse voltage ⁽¹⁾	IEC 61000-4-2 contact discharge IEC 61000-4-2 air discharge	10 20	kV	
T _j	Maximum junction temperature		125	°C	
T _{op}	Operating temperature range		- 30 to + 85	°C	
T _{stg}	Storage temperature range		- 55 to 150	°C	

^{1.} Measurements done on IEC 61000-4-2 test bench. For further details see Application note AN3353.

Figure 3. Electrical characteristics (definitions)

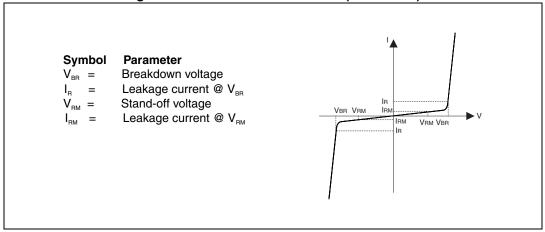


Table 2. Electrical characteristics (values, $T_{amb} = 25$ °C)

Symbol	Test conditions	Min.	Тур.	Max.	Unit
V_{BR}	I _R = 1 mA	6			V
I _{RM}	V _{RM} = 3 V per line			100	nA
R _{DC}	DC serial resistance		3	4	Ω

2 Application schematics

Figure 4. USB2.0 application


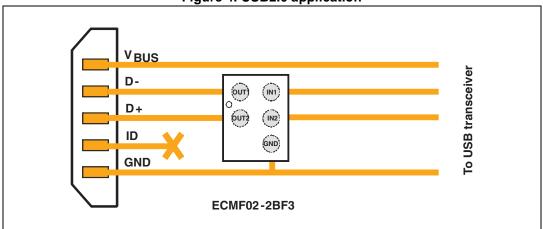


Figure 5. MIPI D-PHY application

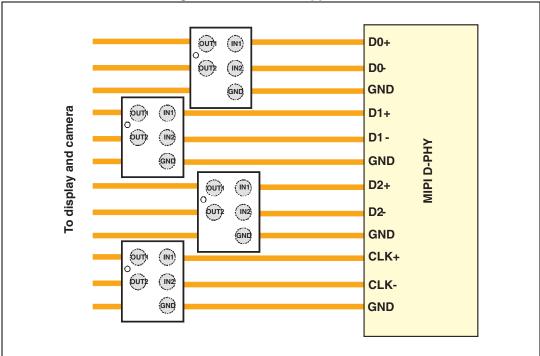

Measurement curves ECMF02-2BF3

3 Measurement curves

Figure 6. SDD21 differential attenuation measurement (Z $_{0~diff}$ = 100 $\Omega)$


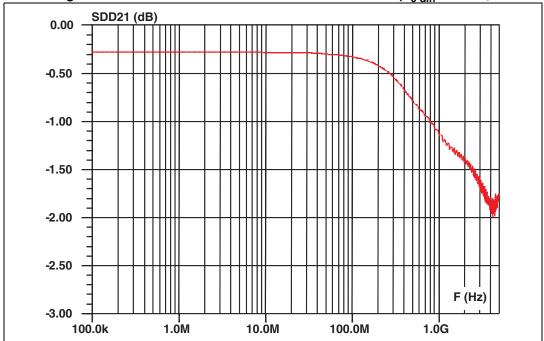


Figure 7. SCC21 common mode attenuation measurement (Z $_{0 \text{ com}}$ = 50 Ω)

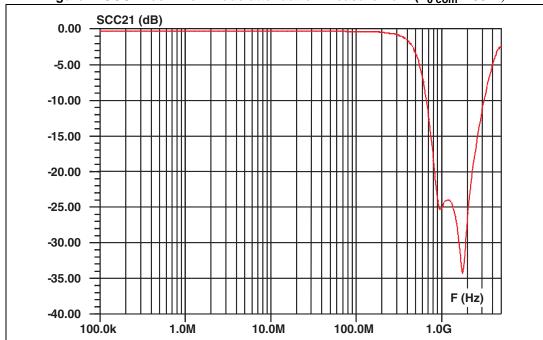

ECMF02-2BF3 Measurement curves

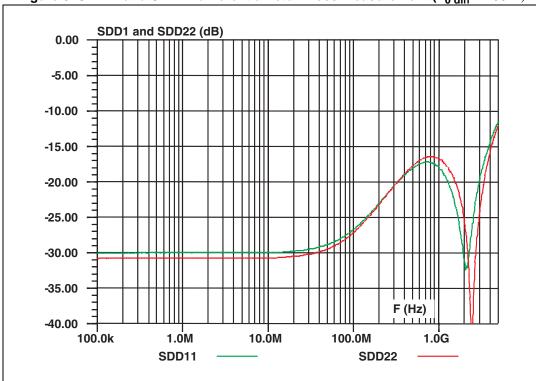


Figure 8. SDD11 and SDD22 differential return loss measurement (Z $_{\rm 0~diff}$ = 100 $\Omega)$

Measurement curves ECMF02-2BF3


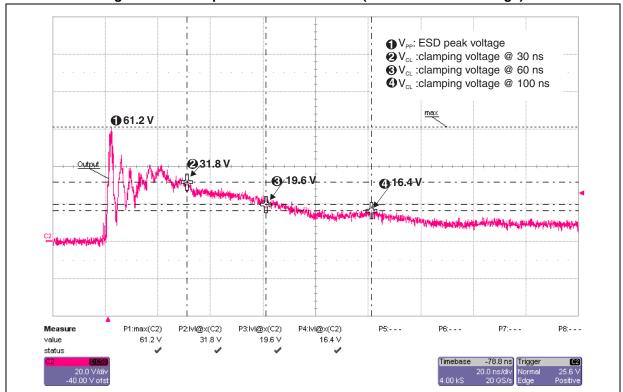


Figure 9. ESD response to IEC 61000-4-2 (+8 kV contact discharge)



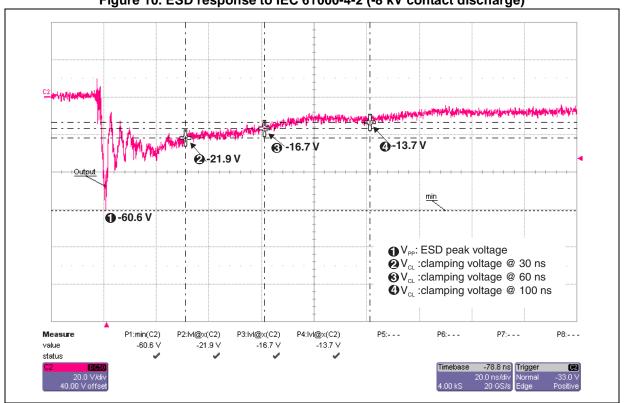

4 High speed differential standard compliance tests

4.1 USB2.0 compliance tests

Figure 11. TDR measurement (loaded by $Z_{diff} = 90 \Omega$)



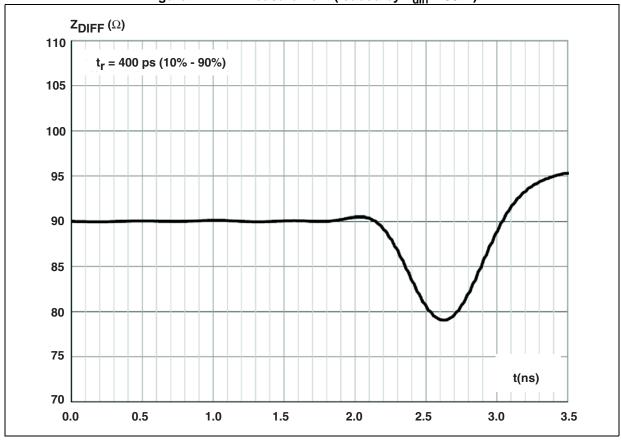


Figure 12. Eye diagram with USB2.0 template



4.2 HDMI1.4 compliance tests

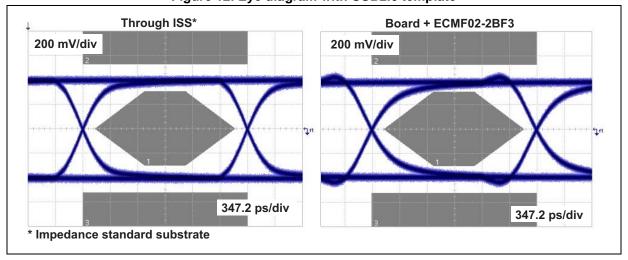

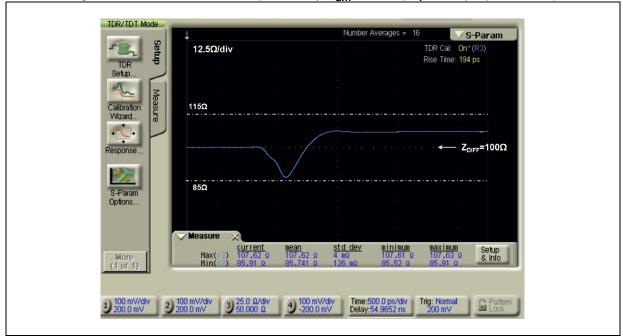



5 PCB layout recommendations

OUT2
OUT1

Pad layout recommendation

Copper pad Diameter:
220 μm recommended
260 μm maximum

Solder mask opening:
300 μm minimum

Solder stencil opening:
220 μm recommended

Figure 14. PCB layout recommendations


Package information ECMF02-2BF3


Package information 6

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

 $400 \ \mu m \pm 40$ $505 \mu m \pm 55$ 100 µm ± 40 255 µm ± 40 1230 µm ± 40 µm 215 µm 215 µm $830 \mu m \pm 30 \mu m$

Figure 15. Package dimensions



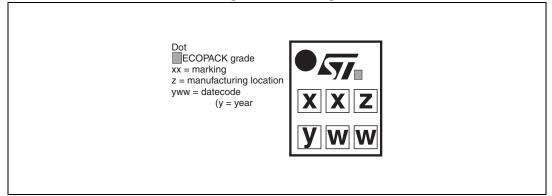

10/13 DocID018656 Rev 2

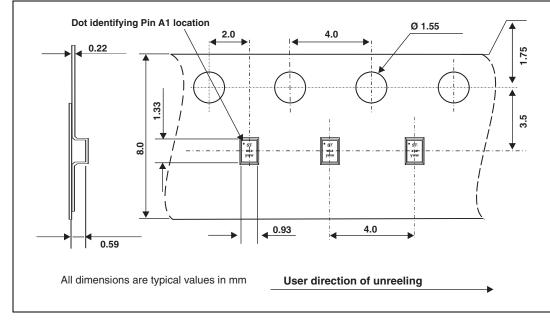


Figure 17. Flip Chip tape and reel specification

Note:

More information is available in the application notes:

AN2348, "IPAD™ 400 µm Flip Chip: package description and recommendations for use" AN1751, "EMI filters: recommendations and measurements"

Ordering information 7

ECMF 02 2 B **Function** ESD common mode filter **Number of lines** $\overline{02} = 2 \text{ lines}$ Number of ESD protected lines 2 = 2 ESD protected lines Version **Package** F3 = WLCSP 0.4 mm pirch

Figure 18. Ordering information scheme

Table 3. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
ECMF02-2BF3	KE	Flip Chip	1.15 mg	5000	Tape and reel 7"



Revision history ECMF02-2BF3

8 Revision history

Table 4. Document revision history

Date	Revision	Changes
09-Feb-2012	1	Initial release.
07-Mar-2014	2	Updated Figure 13.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2014 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by STMicroelectronics manufacturer:

Other Similar products are found below:

60KS200C D12V0H1U2WS-7 D18V0L1B2LP-7B 82356050220 D5V0M5U6V-7 NTE4902 P4KE27CA P6KE11CA P6KE39CA-TP
P6KE8.2A SA110CA SA60CA SA64CA SMBJ12CATR SMBJ8.0A SMLJ30CA-TP ESD101-B1-02ELS E6327 ESD112-B1-02EL E6327
ESD119B1W01005E6327XTSA1 ESD5V0J4-TP ESD5V0L1B02VH6327XTSA1 ESD7451N2T5G 19180-510 CPDT-5V0USP-HF
3.0SMCJ33CA-F 3.0SMCJ36A-F HSPC16701B02TP D3V3Q1B2DLP3-7 D55V0M1B2WS-7 DESD5V0U1BL-7B DRTR5V0U4SL-7
SCM1293A-04SO ESD200-B1-CSP0201 E6327 ESD203-B1-02EL E6327 SM12-7 SMF8.0A-TP SMLJ45CA-TP CEN955 W/DATA
82350120560 82356240030 VESD12A1A-HD1-GS08 CPDUR5V0R-HF CPDUR24V-HF CPDQC5V0U-HF CPDQC5V0USP-HF
CPDQC5V0-HF D1213A-01LP4-7B D1213A-02WL-7 ESDLIN1524BJ-HQ 5KP100A