

EMIF10-LCD02F3

10-line IPAD™, EMI filter and ESD protection for LCD and cameras

Features

- Lead-free package
- EMI symmetrical (I/O) low-pass filter
- High efficiency in EMI filtering
- 400 µm pitch
- Compatible with high speed data rate
- Very low PCB space occupation: < 4 mm²
- Very thin package: 0.60 mm
- High efficiency in ESD suppression
- High reliability offered by monolithic integration
- High reduction of parasitic elements through integration and wafer level packaging

Complies with the following standards

- IEC 61000-4-2 level 4 on inputs and outputs
 - 15 kV (air discharge)
 - 8 kV (contact discharge)
- MIL STD 883G Method 3015-6 Class 3

Applications

Where EMI filtering in ESD sensitive equipment is required:

- LCD for mobile phones
- Computers and printers
- Communication systems
- MCU boards

Description

The EMIF10-LCD02F3 is a 10-line highly integrated device designed to suppress EMI/RFI noise in all systems subjected to electromagnetic interference. The EMIF10 Flip-Chip packaging means the package size is equal to the die size.

This filter includes ESD protection circuitry, which prevents damage to the protected device when subjected to ESD surges up 15 kV.

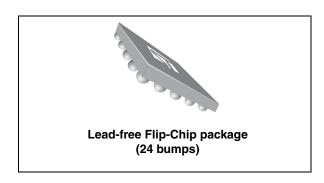


Figure 1. Pin layout (bump side)


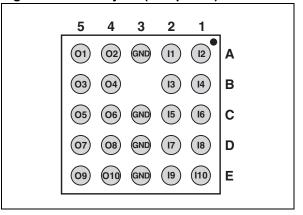


Figure 2. Device configuration

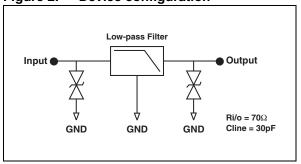

TM: IPAD is a trademark of STMicroelectronics.

Characteristics EMIF10-LCD02F3

1 Characteristics

Table 1. Absolute maximum ratings ($T_{amb} = 25$ °C)

Symbol	Parameter and test conditions	Value	Unit
T _j	Maximum junction temperature	125	°C
T _{op}	Operating temperature range	-40 to +85	°C
T _{stg}	Storage temperature range	-55 to 150	°C

Figure 3. Electrical characteristics (definitions)

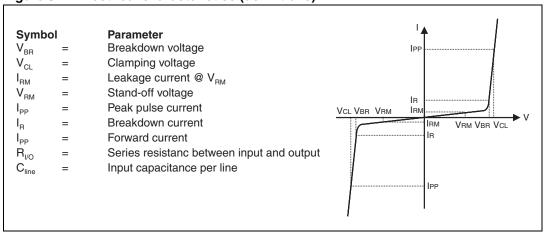



Table 2. Electrical characteristics ($T_{amb} = 25 \, ^{\circ}C$)

Symbol	Test conditions	Min.	Тур.	Max.	Unit
V_{BR}	I _R = 1 mA	6	8	10	V
I _{RM}	V _{RM} = 3 V		50	200	nA
R ₂	Tolerance ± 20%		70		Ω
C _{line}	Vline = 0 V, V _{OSC} = 30 mV, F =1 MHz			30	pF

EMIF10-LCD02F3 Characteristics

Figure 4. S21 all lines attenuation measurement


Figure 5. Analog cross talk measurement

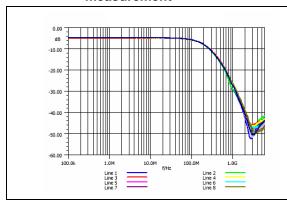

-0.00 -20.00 -30.00 -40.00 -60

Figure 6. ESD response to IEC 61000-4-2 (+15 kV air discharge) on one input and on one output

Figure 7. ESD response to IEC 61000-4-2 (-15 kV air discharge) on one input and on one output

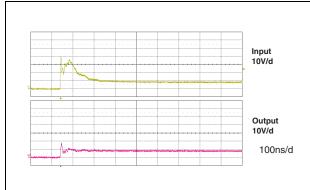



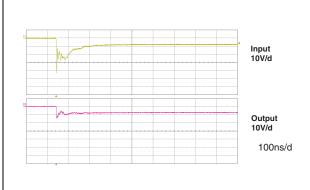


Figure 8. Line capacitance versus applied voltage

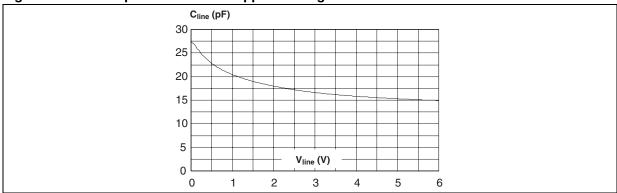

2 Ordering information scheme

Figure 9. Ordering information scheme

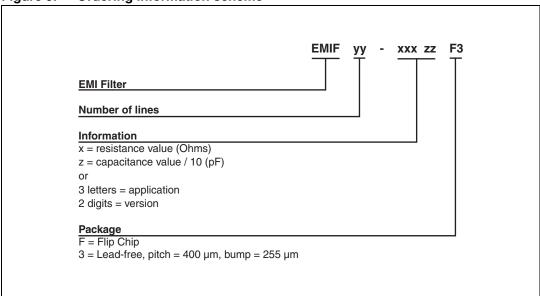

3 Package information

- Epoxy meets UL94, V0
- Lead-free packages

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

Figure 10. Package dimensions


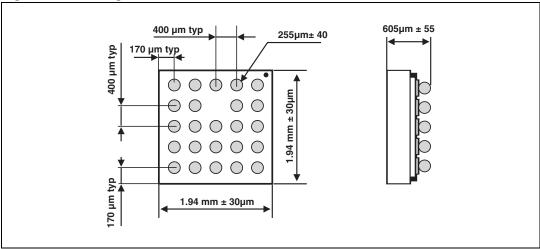


Figure 11. Footprint

Figure 12. Marking

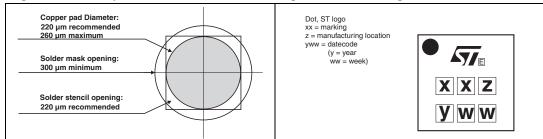

Package information EMIF10-LCD02F3

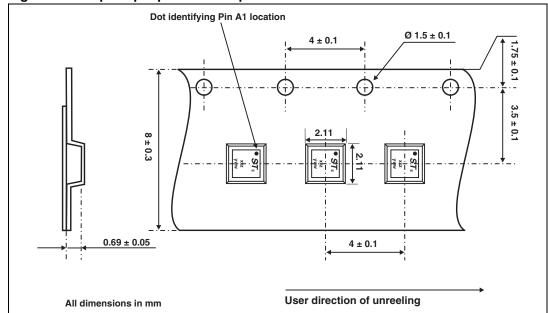


Figure 13. Flip-Chip tape and reel specification

Note:

More information is available in the application notes:

AN2348: "STMicroelectronics 400 micro-metre Flip-Chip: Package description and recommendation for use"

AN1751: "EMI Filters: Recommendations and measurements"

4 Ordering information

Table 3. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
EMIF10-LCD02F3	GY	Flip-Chip	5.0 mg	5000	Tape and reel 7"

5 Revision history

Table 4. Document revision history

Date	Revision	Changes
11-Jul-2005	1	First issue.
28-Apr-2008	2	Updated ECOPACK statement. Updated <i>Figure 9</i> , <i>Figure 10</i> , <i>Figure 11</i> and <i>Figure 13</i> . Reformatted to current standards.
18-Nov-2009	3	Updated <i>Figure 10</i> for die dimension reduction. Updated <i>Figure 13</i> for scaling.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

8/8

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

Doc ID 11507 Rev 3



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for EMI Filter Circuits category:

Click to view products by STMicroelectronics manufacturer:

Other Similar products are found below:

761280-1 SBSGC0500224MXB SBSPP0250104MXT SBSPP0250154MXT SBSPP0500473MXT SBSPP1000102MXT

SBSPP1000153MXB SBSPP1000220MCT SBSPP1000332MXT SBSPP1000470MCT SBSPP1000471MCT SBSPP1000472MXT

SNZF220DFT1G CM1442-06CP EMI8041MUTAG SBSPP0500473MXB SBSPP0500683MXT SBSPP1000101MCT SBSPP1000220MCB

SBSPP1000221MCT EMIF06-USD05F3 EMIF03-SIM03F3 EMI7112FCTAG EMI7403FCTBG EMI2180MTTBG CM1442-08CP

CSPEMI204FCTAG SBSPP1000152MXT SBSGC5000473MXT SBSMC0500474MXT EMI8043MUTAG MEA2010PE360T001

NFA18SL307V1A45L 1-6609037-5 CM1690-06DE EMIF05-SK01F3 EMIF02-USB03F2 BNX022-01L BNX024H01L BNX025H01L

BNX026H01L NFA21SL806X1A48L NFL18SP157X1A3D NFL21SP106X1C3D NFL21SP207X1C3D NFL21SP307X1C3D

NFL21SP506X1C3D NFL21SP706X1C3D NFW31SP207X1E4L BNX022-01B