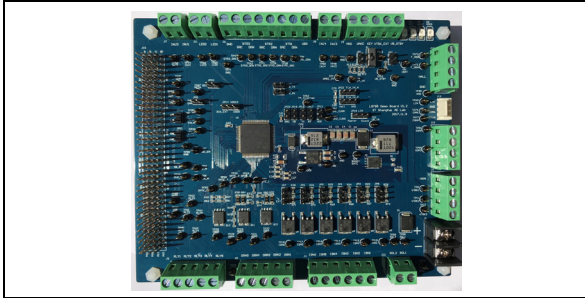


EVAL-L9788 evaluation board

Data brief

**Features**

- Voltage min/max: 0 to 36 V
- Engineered for ISO26262 compliant system
- 1 pre-boost regulator and 1 pre-buck regulator
- 1 linear 5 V regulator with 1 A output current
- 3 independent self-protection 5 V tracking regulators with 150 mA output.
- 1 input voltage pin for monitor external tracking
- Coordinated soft start-up of all regulators
- 4 channels LS injector LS drivers
- 2 channels LS drivers for O2H load with current sense
- 2 channels LS camshaft or solenoid drivers
- 5 channels LS relay drivers
- 2 channels LS LED drivers
- 3 channels LS/HS drivers with low battery function for smart start
- 1 channel LS main relay driver (MRD) with internal diode for reverse battery protection
- 5 channels pre-drivers for external FET drivers
- Pre-driver 1&3 configurable for O2H load with external Rshunt-on the source of ext. N-Channel Mos
- 6 channels pre-drivers for internal or external igniter drivers
- 1 K-Line ISO9141/LIN 2.1 compliant
- Integrated charge-pump
- VRS-interface
- Watchdog
- Pin Wake-up
- Temperature sensor and monitoring
- Stop-counter with Wake-up
- Dual bandgap reference & oscillator
- Micro-second-channel MSC for differential single ended mode
- SEO function
- CAN-FD with wake up by CAN function
- Device registers setting and the full diagnostic are available through MSC
- Access to all relevant pins by test points
- Input signal connector compatible with the SPC563M-DISP
- Possibility to connect a generic microcontroller board using a simple adapter

Description

The EVAL-L9788 is an evaluation board designed to evaluate L9788, a smart power device designed by STMicroelectronics in advanced BCD technology.

The L9788 is an integrated circuit designed for automotive engine management system. It is a device realized in ST BCD proprietary technology, able to provide the full set of power supplies and signal pre-processing peripherals needed to control a 4 cylinders internal combustion engine. All the device function configurations can be done via MSC configuration and jumper on the board.

All channels are protected against short circuit, over current and over-temperature conditions.

The board can be connected to the SPC563M-DISP, the Discovery+ board developed for the SPC563M64L.

1 System requirements

- Power Supply: 4 V ÷ 40 V; up to 30 A
- SPC56 discovery board or microcontroller board able to offer:
 - SPI signals
 - 12 GPIO in order to drive Channels and enable pin
 - +5 V or 3.3 V (Vcc)

2 Development toolchain

- Labview and UDE VISUAL PLATFORM
- USB – RS232 cable

3 Demonstration software

Software is available for demonstration purpose.

For more information and download, please refer to www.st.com.

4 Ordering information

Table 1. Order code

Order code	Reference
EVAL-L9788	EVAL-L9788 evaluation board

5 Revision history

Table 2. Document revision history

Date	Revision	Changes
26-Apr-2019	1	Initial release.
22-May-2019	2	Minor text changes.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Management IC Development Tools](#) category:

Click to view products by [STMicroelectronics](#) manufacturer:

Other Similar products are found below :

[EVAL-ADM1168LQEBZ](#) [EVB-EP5348UI](#) [MIC23451-AAAYFL EV](#) [MIC5281YMME EV](#) [DA9063-EVAL](#) [ADP122-3.3-EVALZ](#) [ADP130-0.8-EVALZ](#) [ADP130-1.2-EVALZ](#) [ADP130-1.5-EVALZ](#) [ADP130-1.8-EVALZ](#) [ADP1712-3.3-EVALZ](#) [ADP1714-3.3-EVALZ](#) [ADP1715-3.3-EVALZ](#) [ADP1716-2.5-EVALZ](#) [ADP1740-1.5-EVALZ](#) [ADP1752-1.5-EVALZ](#) [ADP1828LC-EVALZ](#) [ADP1870-0.3-EVALZ](#) [ADP1871-0.6-EVALZ](#) [ADP1873-0.6-EVALZ](#) [ADP1874-0.3-EVALZ](#) [ADP1882-1.0-EVALZ](#) [ADP199CB-EVALZ](#) [ADP2102-1.25-EVALZ](#) [ADP2102-1.875EVALZ](#) [ADP2102-1.8-EVALZ](#) [ADP2102-2-EVALZ](#) [ADP2102-3-EVALZ](#) [ADP2102-4-EVALZ](#) [ADP2106-1.8-EVALZ](#) [ADP2147CB-110EVALZ](#) [AS3606-DB](#) [BQ24010EVM](#) [BQ24075TEVM](#) [BQ24155EVM](#) [BQ24157EVM-697](#) [BQ24160EVM-742](#) [BQ24296MEVM-655](#) [BQ25010EVM](#) [BQ3055EVM](#) [NCV891330PD50GEVB](#) [ISLUSBI2CKIT1Z](#) [LM2744EVAL](#) [LM2854EVAL](#) [LM3658SD-AEV/NOPB](#) [LM3658SDEV/NOPB](#) [LM3691TL-1.8EV/NOPB](#) [LM4510SDEV/NOPB](#) [LM5033SD-EVAL](#) [LP38512TS-1.8EV](#)