



## PD54008L-E

RF power transistors  
The LdmoST Plastic family


### Features

- Excellent thermal stability
- Common source configuration
- Broadband performances  $P_{OUT} = 8W$  with 15 dB gain @ 500MHz
- New leadless plastic package
- EDS protection
- Supplied in tape & reel of 3K units
- In compliance with the 2002/93/EC european directive


### Description

The PD54008L-E is a common source N-Channel, enhancement-mode lateral Field-Effect RF power transistor. It is designed for high gain, broad band commercial and industrial applications. It operates at 7 V in common source mode at frequencies of up to 1 GHz. PD54008L-E boasts the excellent gain, linearity and reliability of STH1LV latest LDMOS technology mounted in the innovative leadless SMD plastic package, PowerFLAT™.

PD54008L-E's superior linearity performance makes it an ideal solution for portable radio.

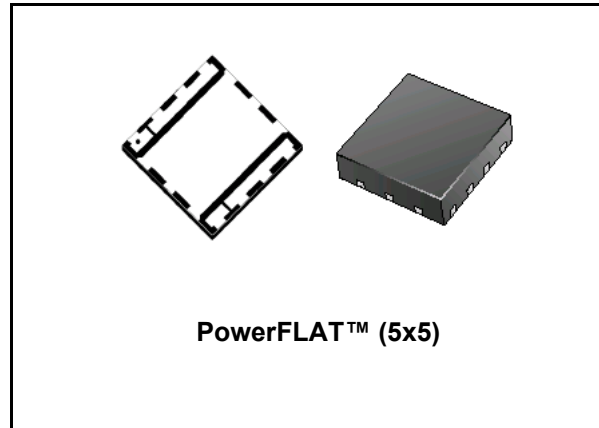

### Pin connection

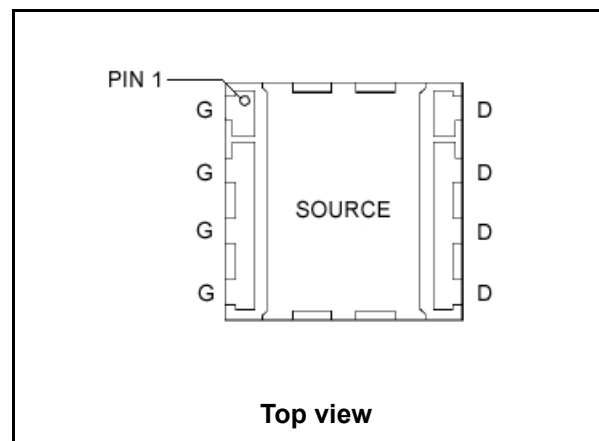

### Order codes

| Part Number | Marking | Package         | Packaging   |
|-------------|---------|-----------------|-------------|
| PD54008L-E  | 54008   | PowerFLAT (5x5) | Tape & Reel |

---

## Contents

|          |                                       |           |
|----------|---------------------------------------|-----------|
| <b>1</b> | <b>Electrical data</b> .....          | <b>3</b>  |
| 1.1      | Maximum ratings .....                 | 3         |
| 1.2      | Thermal data .....                    | 3         |
| 1.3      | Electrical characteristics .....      | 4         |
| <b>2</b> | <b>Impedances</b> .....               | <b>5</b>  |
| <b>3</b> | <b>Typical performance</b> .....      | <b>6</b>  |
| 3.1      | Typical performance (Broadband) ..... | 7         |
| <b>4</b> | <b>Test circuit schematic</b> .....   | <b>8</b>  |
| <b>5</b> | <b>Package mechanical data</b> .....  | <b>10</b> |
| <b>6</b> | <b>Revision history</b> .....         | <b>14</b> |

# 1 Electrical data

## 1.1 Maximum ratings

**Table 1. Absolute maximum ratings ( $T_{CASE} = 25^{\circ}C$ )**

| Symbol        | Parameter                                      | Value       | Unit        |
|---------------|--|-------------|-------------|
| $V_{(BR)DSS}$ | Drain source voltage                           | 25          | V           |
| $V_{GS}$      | Gate-source voltage                            | -0.5 to +15 | V           |
| $I_D$         | Drain current                                  | 5           | A           |
| $P_{DISS}$    | Power dissipation ( $t_{CASE} = 70^{\circ}C$ ) | 26.7        | W           |
| $T_J$         | Maximum operating junction temperature         | 150         | $^{\circ}C$ |
| $T_{STG}$     | Storage temperature                            | -65 to +150 | $^{\circ}C$ |

## 1.2 Thermal data

**Table 2. Thermal data**

| Symbol     | Parameter                           | Value | Unit          |
|------------|-------------------------------------|-------|---------------|
| $R_{thJC}$ | Junction to case thermal resistance | 3     | $^{\circ}C/W$ |

## 1.3 Electrical characteristics

**Table 3. Static** ( $T_{CASE} = 25^{\circ}C$ )

| Symbol       | Test conditions |                 |            | Min | Typ  | Max | Unit    |
|--------------|-----------------|-----------------|------------|-----|------|-----|---------|
| $I_{DSS}$    | $V_{GS} = 0V$   | $V_{DS} = 25V$  |            |     |      | 1   | $\mu A$ |
| $I_{GSS}$    | $V_{GS} = 5V$   | $V_{DS} = 0V$   |            |     |      | 1   | $\mu A$ |
| $V_{GS(Q)}$  | $V_{DS} = 10V$  | $I_D = 50mA$    |            | 2.0 |      | 5.0 | V       |
| $V_{DS(ON)}$ | $V_{GS} = 10V$  | $I_D = 0.5A$    |            |     | 0.09 |     | V       |
| $C_{ISS}$    | $V_{GS} = 0V$   | $V_{DS} = 7.5V$ | $f = 1MHz$ |     | 80   |     | pF      |
| $C_{OSS}$    | $V_{GS} = 0V$   | $V_{DS} = 7.5V$ | $f = 1MHz$ |     | 60   |     | pF      |
| $C_{RSS}$    | $V_{GS} = 0V$   | $V_{DS} = 7.5V$ | $f = 1MHz$ |     | 6.6  |     | pF      |

**Table 4. Dynamic**

| Symbol        | Test conditions  |                   |                 | Min.         | Typ. | Max. | Unit  |
|---------------|------------------|-------------------|-----------------|--------------|------|------|-------|
| $P_{1dB}$     | $V_{DD} = 7.5 V$ | $I_{DQ} = 200 mA$ | $f = 500MHz$    | 8            |      |      | W     |
| $G_{PS}$      | $V_{DD} = 7.5 V$ | $I_{DQ} = 200 mA$ | $P_{OUT} = 8 W$ | $f = 500MHz$ | 15   |      | dB    |
| $\eta_D$      | $V_{DD} = 7.5 V$ | $I_{DQ} = 200 mA$ | $P_{OUT} = 8 W$ | $f = 500MHz$ | 50   |      | %     |
| Load Mismatch | $V_{DD} = 7.5 V$ | $I_{DQ} = 200 mA$ | $P_{OUT} = 8W$  | $f = 500MHz$ | 20:1 |      | VSW R |

**Table 5. ESD protection characteristics**

| Test conditions  | Class |
|------------------|-------|
| Human body model | 2     |
| Machine model    | M3    |

**Table 6. Moisture sensitivity level**

| Test methodology | Rating |
|------------------|--------|
| J-STD-020B       | MSL 3  |

## 2 Impedances

Figure 1. Impedance data schematic

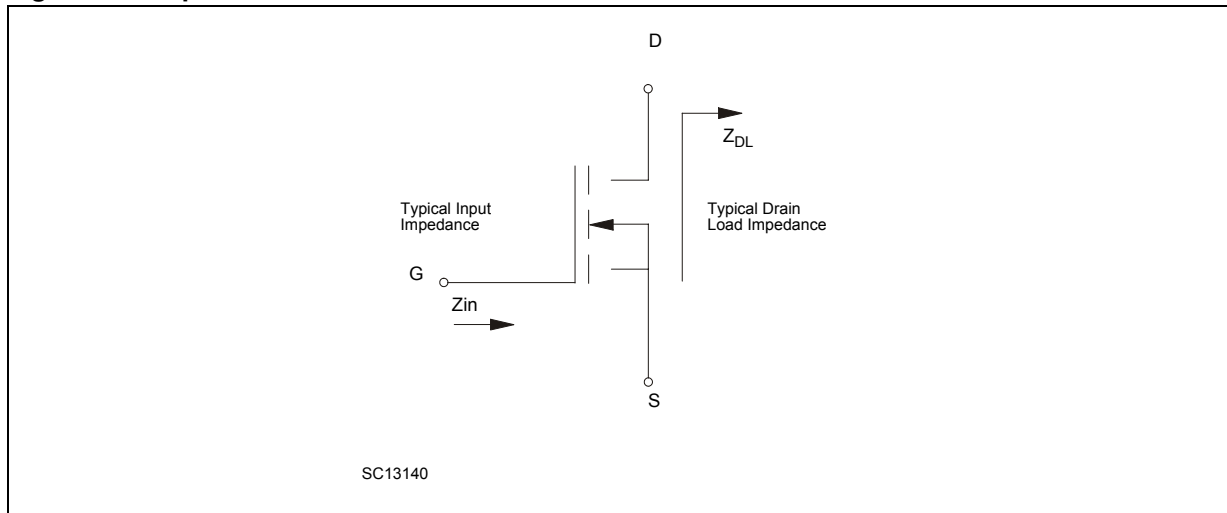



Table 7. Impedance data (1)

| f      | $Z_{IN} (\Omega)$ | $Z_{DL} (\Omega)$ |
|--------|-------------------|-------------------|
| 480MHz | $1.12 - j 2.02$   | $2.01 + j 0.13$   |
| 500MHz | $1.3 - j 2.01$    | $1.84 + j 0.7$    |
| 520MHz | $1.66 - j 2.55$   | $1.66 + j 1.51$   |


1. In Broadband amplifier

### 3 Typical performance


**Figure 2. Power gain vs output power**

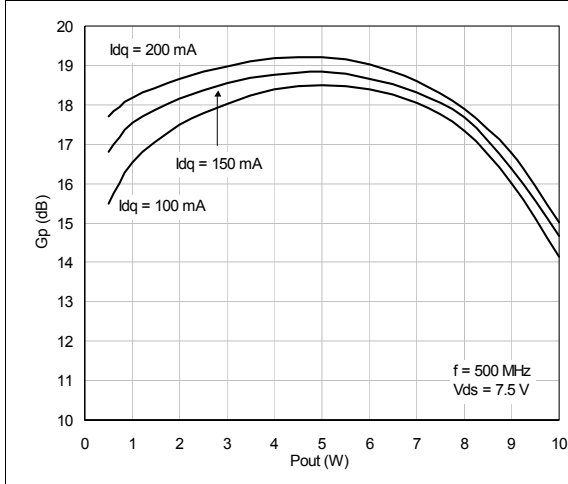


**Figure 3. Efficiency vs output power**

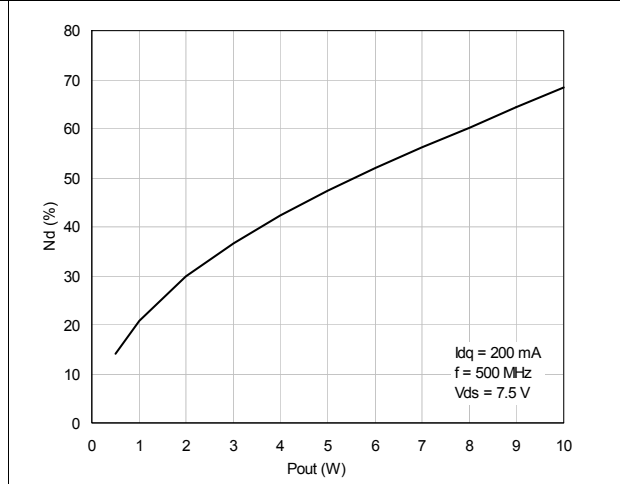

**Figure 4. Return loss vs output power**

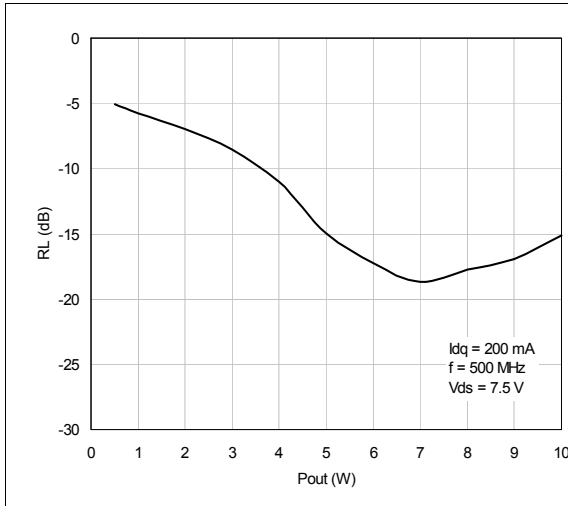

**Figure 5. Capacitance vs supply voltage**

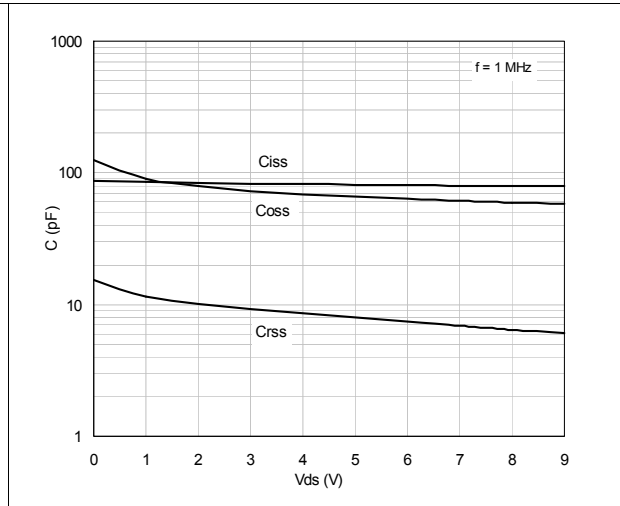

### 3.1 Typical performance (Broadband)

Figure 6. Power gain vs frequency

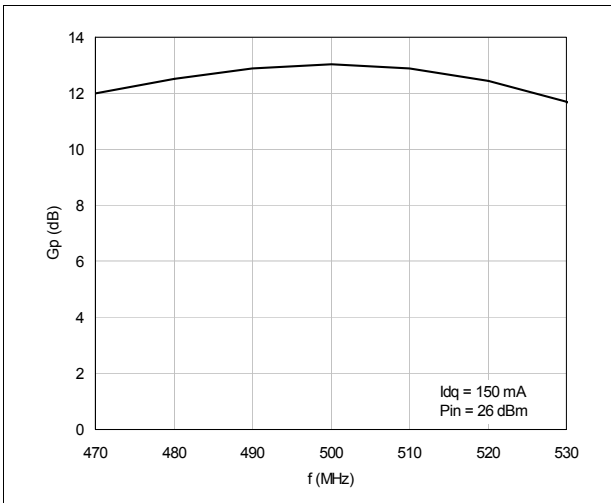


Figure 7. Efficiency vs frequency


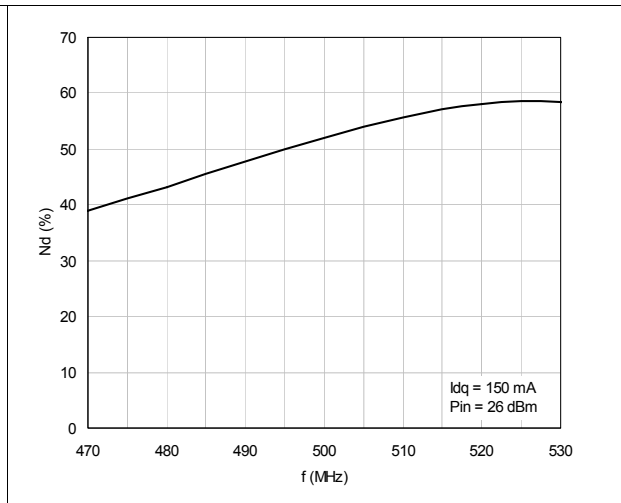


Figure 8. Return loss vs frequency

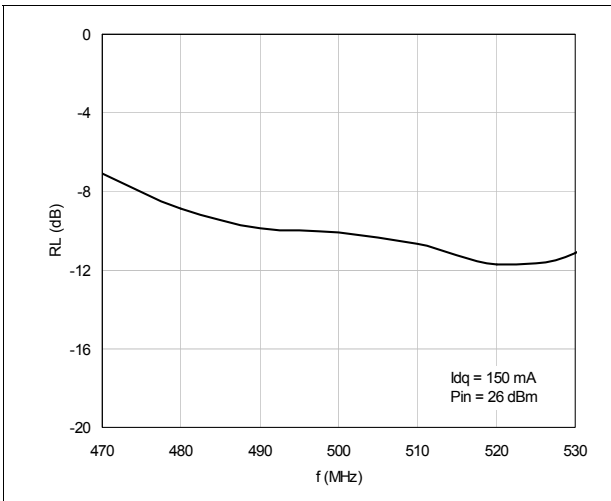

## 4 Test circuit schematic

Figure 9. Internal schematic

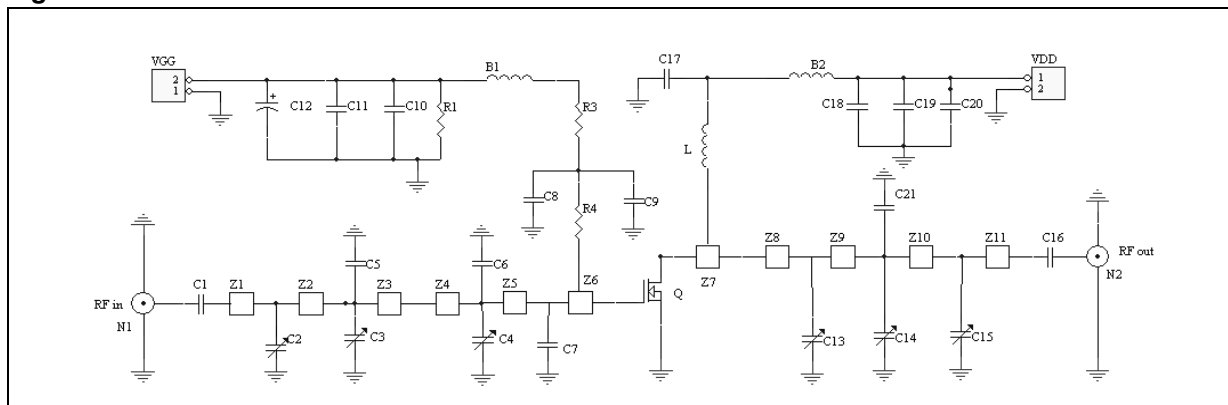


Table 8. Test circuit component part list

| Component           | Description                            |
|---------------------|--|
| B1, B2              | Ferrite bead                           |
| C1, C16             | 300 pF, 100 mil ATC                    |
| C2, C3, C4, C13,C14 | 1 -:- 20 pF Trimmer cap - JOHANSON     |
| C15                 | 0.8 -:- 10 pF Trimmer cap - JOHANSON   |
| C5                  | 36 pF, 100 mil ATC                     |
| C6                  | 51 pF, 100 mil ATC                     |
| C7                  | 62 pF, 100 mil ATC                     |
| C8, C17             | 150 pF, 100 mil CHIP CAP               |
| C9                  | 1 nF, 100 mil CHIP CAP                 |
| C10, C18            | 1000 pF, 100 mil CHIP CAP              |
| C11, C19            | 0.1 nF, 100 mil CHIP CAP               |
| C12, C20            | 10 $\mu$ F 50 V Electrolytic Capacitor |
| C21                 | 15 pF, 100 mil ATC                     |
| L                   | 43nH, Coilcraft                        |
| R1                  | 33 K $\Omega$ , 1W CHIP Resistor       |
| R3                  | 1 K $\Omega$ , 1W CHIP Resistor        |
| R4                  | 15 $\Omega$ , 1W CHIP Resistor         |
| Z1                  | 0.49" X 0.080" MICROSTRIP              |
| Z2                  | 1.024" X 0.080" MICROSTRIP             |
| Z3                  | 0.079" X 0.080" MICROSTRIP             |
| Z4                  | 0.24" X 0.223" MICROSTRIP              |
| Z5                  | 0.079" X 0.223" MICROSTRIP             |



**Table 8. Test circuit component part list**

|        |  |
|--------|--|
| Z6     | 0.138" X 0.223" MICROSTRIP   |
| Z7     | 0.259" X 0.223" MICROSTRIP   |
| Z8     | 0.079" X 0.080" MICROSTRIP   |
| Z9     | 0.413" X 0.080" MICROSTRIP   |
| Z10    | 0.756" X 0.080" MICROSTRIP   |
| Z11    | 0.61" X 0.080" MICROSTRIP  |
| N1, N2 | Type N Flange Mount  |
| Board  | ROGER, ULTRA LAM 2000 THK 0.030", $\epsilon_r = 2.55$ 2oz. ED cu SIDES |


## 5 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect . The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com)

Table 9. PowerFLAT™ mechanical data

| Dim. | mm   |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | Min. | Typ. | Max. | Min.  | Typ.  | Max.  |
| A    |      | 0.90 | 1.00 |       | 0.035 | 0.039 |
| A1   |      | 0.02 | 0.05 |       | 0.001 | 0.002 |
| A3   |      | 0.24 |      |       | 0.009 |       |
| AA   | 0.15 | 0.25 | 0.35 | 0.006 | 0.01  | 0.014 |
| b    | 0.43 | 0.51 | 0.58 | 0.017 | 0.020 | 0.023 |
| c    | 0.64 | 0.71 | 0.79 | 0.025 | 0.028 | 0.031 |
| D    |      | 5.00 |      |       | 0.197 |       |
| d    |      | 0.30 |      |       | 0.011 |       |
| E    |      | 5.00 |      |       | 0.197 |       |
| E2   | 2.49 | 2.57 | 2.64 | 0.098 | 0.101 | 0.104 |
| e    |      | 1.27 |      |       | 0.050 |       |
| f    |      | 3.37 |      |       | 0.132 |       |
| g    |      | 0.74 |      |       | 0.03  |       |
| h    |      | 0.21 |      |       | 0.008 |       |

Figure 10. PowerFLAT™ package dimensions

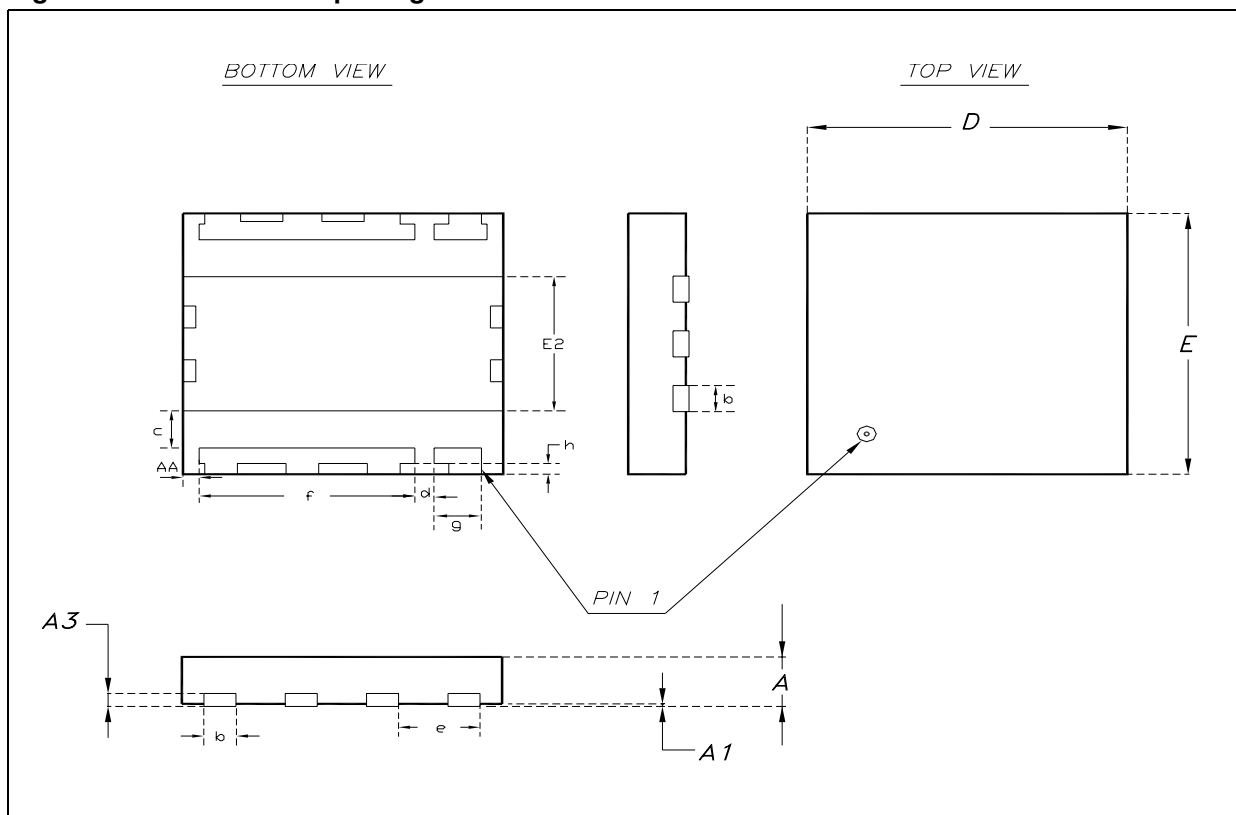

**Table 10. PowerFLAT™ tape & reel dimensions**

| DIM. | mm.  |      |      |
|------|------|------|------|
|      | Min. | Typ  | Max. |
| Ao   | 5.15 | 5.25 | 5.35 |
| Bo   | 5.15 | 5.25 | 5.35 |
| Ko   | 1.0  | 1.1  | 1.2  |

**Figure 11. PowerFLAT™ tape & reel**


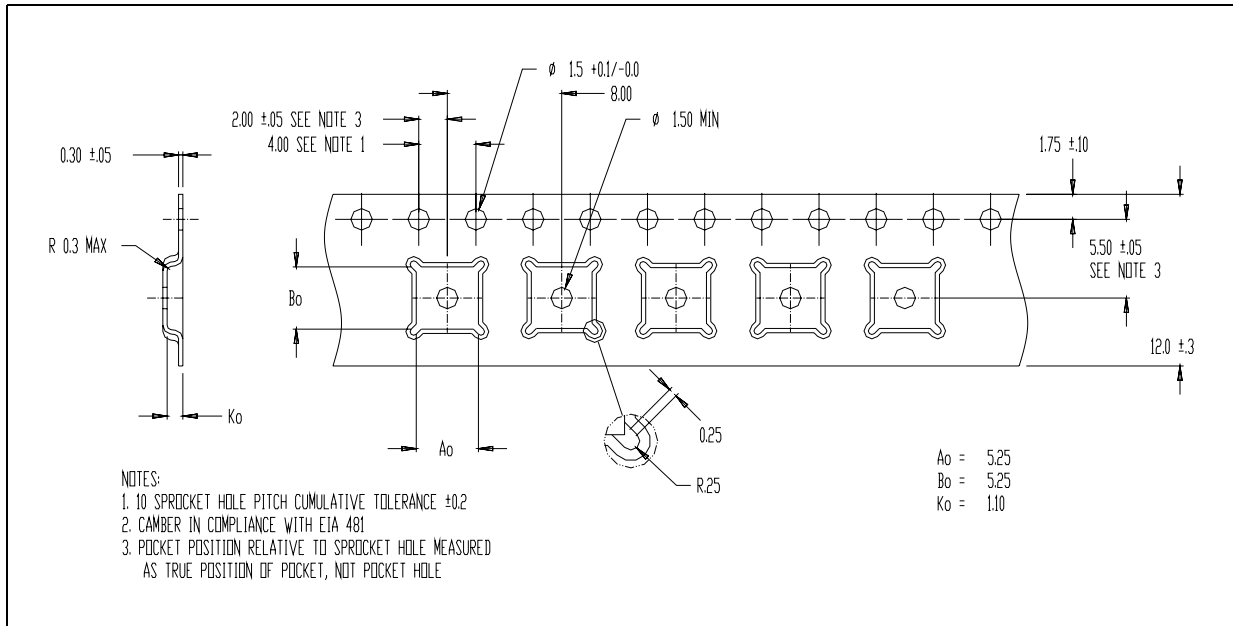


Table 11. Recommended footprint

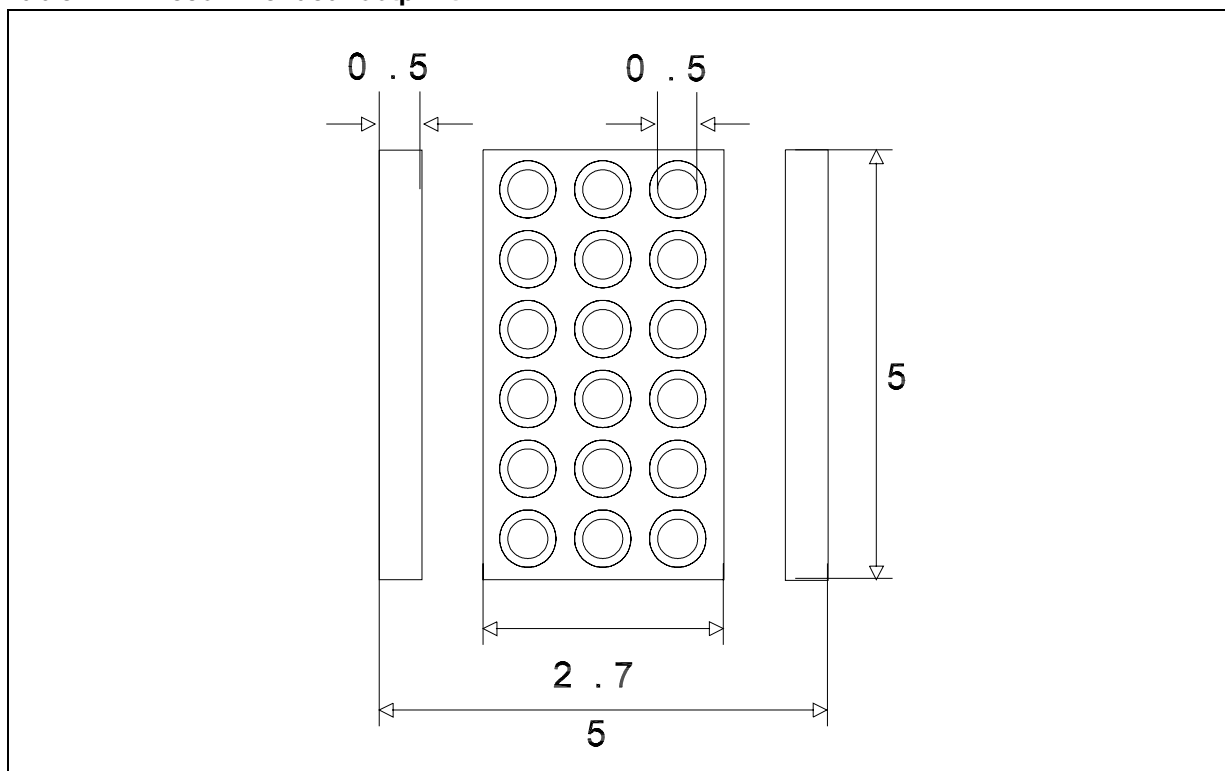

## 6 Revision history

**Table 12. Revision history**

| Date        | Revision | Changes                       |
|-------------|----------|-------------------------------|
| 19-Jan-2006 | 1        | First Issue                   |
| 23-Jan-2007 | 2        | Document has been reformatted |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF MOSFET Transistors](#) category:*

*Click to view products by [STMicroelectronics](#) manufacturer:*

Other Similar products are found below :

[MRF492](#) [MRFE8VP8600HR5](#) [ARF1511](#) [ARF465BG](#) [BF 2030 E6814](#) [BLF861A](#) [DU1215S](#) [DU28200M](#) [UF28100M](#) [DU2820S](#)  
[MHT1008NT1](#) [MMRF1014NT1](#) [MRF426](#) [ARF468AG](#) [ARF468BG](#) [MAPHST0045](#) [MRFE6VP61K25NR6](#) [DU2860U](#) [VRF152GMP](#)  
[MRFE6VP5300NR1](#) [BF2040E6814HTSA1](#) [MRFE6VP5150GNR1](#) [LET9060S](#) [MRF136Y](#) [BF999E6327HTSA1](#) [SD2931-12MR](#)  
[BF998E6327HTSA1](#) [AFV10700HR5](#) [MRF141](#) [MRF171](#) [MRF172](#) [MRF174](#) [QPD1020SR](#) [BF 1005S E6327](#) [MRF134](#) [MRF136](#) [MRF137](#)  
[MRF141G](#) [MRF151A](#) [MRF151G](#) [MRF157](#) [MRF158](#) [MRF160](#) [MRF171A](#) [MRF177](#) [UF2840G](#) [TGF3021-SM](#) [ARF1510](#) [ARF448BG](#)  
[ARF449AG](#)