


STM32 discovery pack for 2G/3G cellular to cloud

Data brief

Features

- STM32L496AGI6 microcontroller featuring 1 Mbyte of Flash memory and 320 Kbytes of RAM in a UFBGA169 package
- USB OTG HS
- On-board current measurement
- SAI Audio CODEC
- ST-MEMS digital microphones
- 8-Mbit PSRAM
- 2 user LEDs
- 1 user and 1 reset push-buttons
- 4-direction joystick with selection button
- Board connectors:
 - Camera 8 bit
 - USB with Micro-AB
 - Stereo headset jack including analog microphone input
 - microSD™ card
- Board expansion connectors:
 - Arduino™ Uno V3
 - STMod+
- Board expansion features:
 - Quectel UG96 worldwide cellular modem penta-band 2G/3G module, 7.2 Mbps downlink, 5.76 Mbps uplink
 - Modem reset red LED and modem signaling green LED
 - ST Incard™ eSIM based on ST33
 - Switchable SIM interface, eSIM and MicroSIM
 - Pulse 2G/3G SMA antenna for frequency ranges: 850 / 900 / 1800 / 1900 / 2100 MHz
- Flexible power-supply options: ST-LINK, USB V_{BUS}, or external sources

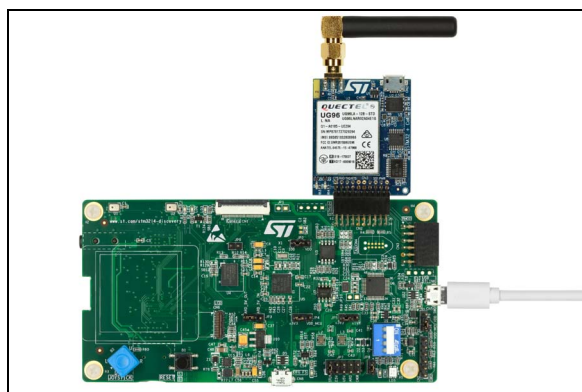

Picture is not contractual.

- On-board ST-LINK/V2-1 SWD, TAG debugger/programmer with USB re-enumeration capability: mass storage, virtual COM port and debug port
- Comprehensive free software libraries and examples available with the STM32Cube package
- Support of a wide choice of Integrated Development Environments (IDEs) including IAR™, Keil®, GCC-based IDEs

Description

The P-L496G-CELL01 STM32 discovery pack for 2G/3G cellular to cloud (STM32-C2C/2G-3G) is a turnkey development platform for cellular and cloud technology based solutions.

The pack is composed of an STM32L496AGI6-based low-power discovery mother board with preloaded firmware, and an STMod+ cellular expansion board with antenna.

General information

The firmware of the P-L496G-CELL01 discovery pack runs on the STM32L496AGI6 Arm[®]-based device.



System requirements

- Windows[®] OS (7, 8 and 10), Linux[®] 64-bit or macOS[®]
- USB Type-A to Micro-B cable

Development toolchains

- Keil[®] MDK-ARM^(a)
- IAR[™] EWARM^(a)
- GCC-based IDEs including free SW4STM32 from AC6

Demonstration software

The STM32 Flash preloaded demonstration software yields an electronic ST Voucher and a URL through the USB ST-Link Virtual COM port, which, through a dedicated STM32-C2C Concierge Portal, allows the Discovery Pack owner to enable corresponding services from ST and various partners, including many precompiled demo Flash binaries. The latest versions of the demonstration source code and associated documentation can be downloaded from the www.st.com webpage.

Ordering information

To order the P-L496G-CELL01 discovery pack refer to [Table 1](#).

a. On Windows[®] only

Table 1. Ordering information

Order code	Target STM32
P-L496G-CELL01	STM32L496AGI6

Technology partners

EMNIFY:

- IoT connectivity platform eSIM

QUECTEL:

- Penta-band 2G/3G module

EXOSITE:

- Cloud data management

GROVESTREAMS:

- IoT platform

Revision history

Table 2. Document revision history

Date	Revision	Changes
12-Feb-2018	1	Initial version
22-Feb-2018	2	Updated <i>Features</i> to remove reference to Arm® Mbed™
24-May-2018	3	Updated <i>Features</i> to add ST Incard™ eSIM, and <i>Demonstration software</i> for precisions

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - ARM category](#):

Click to view products by [STMicroelectronics manufacturer](#):

Other Similar products are found below :

[SAFETI-HSK-RM48](#) [PICOHOBBITFL](#) [CC-ACC-MMK-2443](#) [TWR-MC-FRDMKE02Z](#) [EVALSPEAR320CPU](#) [EVB-SCMIMX6SX](#)
[MAX32600-KIT#](#) [TMDX570LS04HDK](#) [TXSD-SV70](#) [OM13080UL](#) [EVAL-ADUC7120QSPZ](#) [OM13082UL](#) [TXSD-SV71](#)
[YGRPEACHNORMAL](#) [OM13076UL](#) [PICODWARFFL](#) [YR8A77450HA02BG](#) [3580](#) [32F3348DISCOVERY](#) [ATTINY1607](#) [CURIOSITY](#)
[NANO](#) [PIC16F15376](#) [CURIOSITY NANO BOARD](#) [PIC18F47Q10](#) [CURIOSITY NANO](#) [VISIONSTK-6ULL V.2.0](#) [80-001428](#) [DEV-17717](#)
[EAK00360](#) [YR0K77210B000BE](#) [RTK7EKA2L1S00001BE](#) [MAX32651-EVKIT#](#) [SLN-VIZN-IOT](#) [LV18F V6 DEVELOPMENT SYSTEM](#)
[READY FOR AVR BOARD](#) [READY FOR PIC BOARD](#) [READY FOR PIC \(DIP28\)](#) [EVB-VF522R3](#) [AVRPLC16 V6 PLC SYSTEM](#)
[MIKROLAB FOR AVR XL](#) [MIKROLAB FOR PIC L](#) [MINI-AT BOARD - 5V](#) [MINI-M4 FOR STELLARIS](#) [MOD-09.Z](#) [BUGGY +](#)
[CLICKER 2 FOR PIC32MX + BLUETOOT](#) [1410](#) [LETS MAKE PROJECT PROGRAM. RELAY PIC](#) [LETS MAKE - VOICE](#)
[CONTROLLED LIGHTS](#) [LPC-H2294](#) [DSPIC-READY2 BOARD](#) [DSPIC-READY3 BOARD](#) [MIKROBOARD FOR ARM 64-PIN](#)
[MIKROLAB FOR AVR](#)