


60 V, 2 x 10 A, low drop power Schottky rectifier

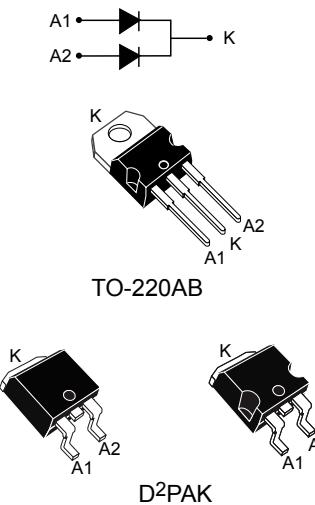

Features

- Low forward voltage drop
- Negligible switching losses
- Low thermal resistance
- Avalanche capability specified
- ECOPACK² compliant component in TO-220AB, on demand for D²PAK

Applications

- Set-top box
- Battery charger
- DC / DC converter
- Notebook adapter
- Switching diodes

Description

Dual center tab Schottky rectifier suited for SMPS and high frequency DC to DC converters.

Packaged in TO-220AB and D²PAK, the **STPS20L60C** is intended for use in high frequency inverters.

| Product status link | |
|----------------------------|--------------|
| STPS20L60C | |
| Product summary | |
| Symbol | Value |
| $I_{F(AV)}$ | 2 x 10 A |
| V_{RRM} | 60 V |
| $T_j(\text{max.})$ | 150 °C |
| $V_F(\text{typ.})$ | 0.48 V |

1 Characteristics

Table 1. Absolute ratings (limiting values, per diode, at 25 °C unless otherwise specified)

| Symbol | Parameter | | | Value | Unit | |
|---------------------|---|--|---|-------------|------|--|
| V _{RRM} | Repetitive peak reverse voltage | | | 60 | V | |
| I _{F(RMS)} | Forward rms current | | | 30 | A | |
| I _{F(AV)} | Average forward current | T _c = 135 °C, δ = 0.5 square wave | Per diode | 10 | A | |
| | | | Per device | 20 | | |
| I _{FSM} | Surge non repetitive forward current | | t _p = 10 ms sinusoidal | 220 | A | |
| P _{ARM} | Repetitive peak avalanche power | | t _p = 10 μs, T _j = 125 °C | 430 | W | |
| T _{stg} | Storage temperature range | | | -65 to +175 | °C | |
| T _j | Maximum operating junction temperature ⁽¹⁾ | | | 150 | °C | |
| dV/dt | Critical rate of rise reverse voltage | | | 10000 | V/μs | |

1. $(dP_{tot}/dT_j) < (1/R_{th(j-a)})$ condition to avoid thermal runaway for a diode on its own heatsink.

Table 2. Thermal resistance parameters

| Symbol | Parameter | | Max. value | Unit |
|----------------------|------------------|-----------|------------|------|
| R _{th(j-c)} | Junction to case | Per diode | 1.6 | °C/W |
| | | Total | 0.85 | |
| R _{th(c)} | Coupling | | 0.1 | |

When the diodes 1 and 2 are used simultaneously :

$$\Delta T_j(\text{diode 1}) = P(\text{diode 1}) \times R_{th(j-c)}(\text{per diode}) + P(\text{diode 2}) \times R_{th(c)}$$

For more information, please refer to the following application note :

- AN5088 : Rectifiers thermal management, handling and mounting recommendations

Table 3. Static electrical characteristics (per diode)

| Symbol | Parameter | Test conditions | | Min. | Typ. | Max. | Unit |
|-------------------------------|-------------------------|-------------------------|-----------------------------------|------|------|------|------|
| I _R ⁽¹⁾ | Reverse leakage current | T _j = 25 °C | V _R = V _{RRM} | - | | 350 | μA |
| | | T _j = 125 °C | | - | 65 | 95 | mA |
| V _F ⁽¹⁾ | Forward voltage drop | T _j = 25 °C | I _F = 10 A | - | | 0.60 | V |
| | | T _j = 125 °C | | - | 0.48 | 0.56 | |
| | | T _j = 25 °C | I _F = 20 A | - | | 0.74 | |
| | | T _j = 125 °C | | - | 0.62 | 0.70 | |

1. Pulse test: t_p = 380 μs, δ < 2%

To evaluate the conduction losses, use the following equation:

$$P = 0.42 \times I_{F(AV)} + 0.014 \times I_{F(RMS)}^2$$

For more information, please refer to the following application notes related to the power losses :

- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode

1.1 Characteristics (curves)

Figure 1. Average forward current versus case temperature ($\delta = 0.5$, per diode)

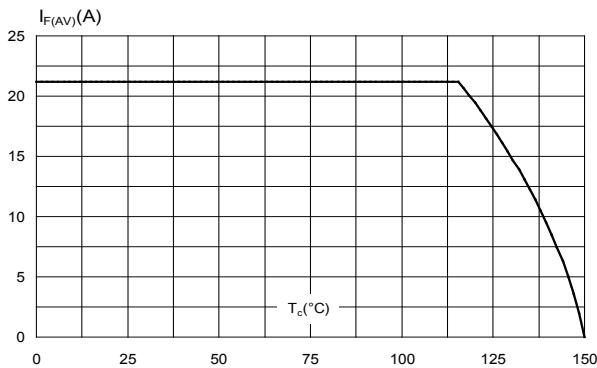


Figure 2. Normalized avalanche power derating versus pulse duration ($T_j = 125$ °C)

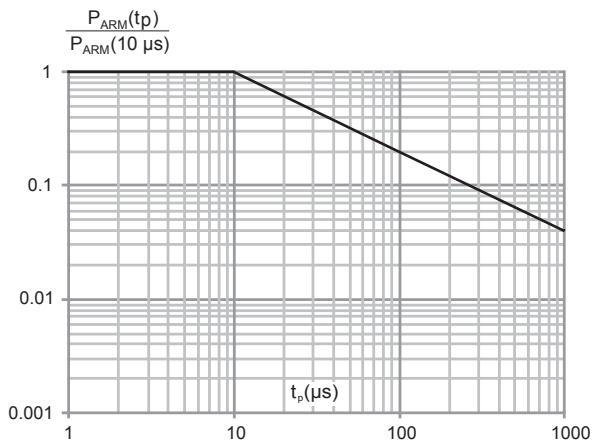


Figure 3. Relative variation of thermal impedance junction to case versus pulse duration

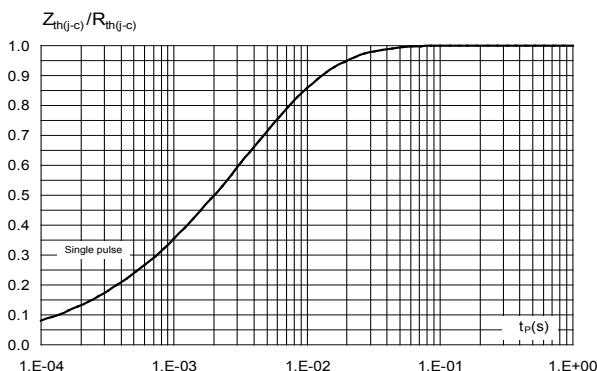


Figure 4. Reverse leakage current versus reverse voltage applied (typical values, per diode)

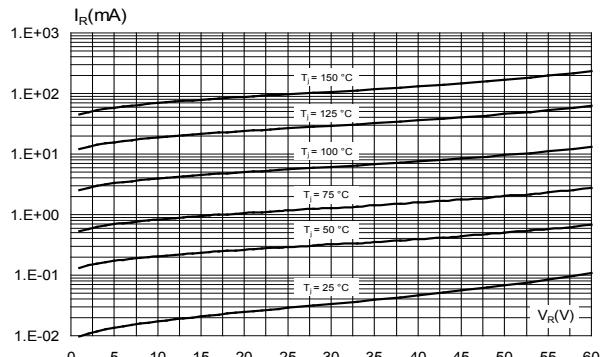


Figure 5. Junction capacitance versus reverse voltage applied (typical values, per diode)

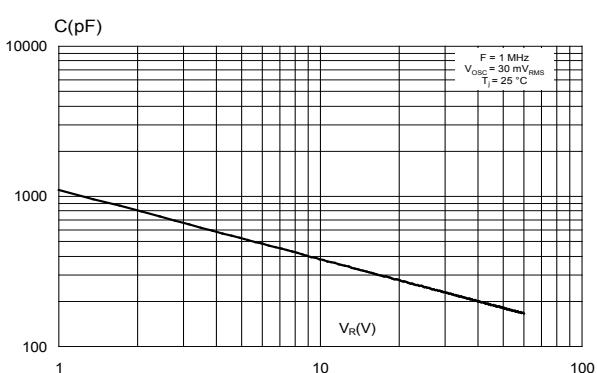


Figure 6. Forward voltage drop versus forward current (typical values, per diode)


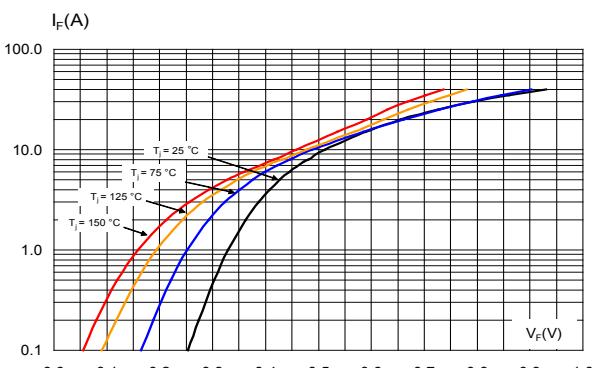


Figure 7. Thermal resistance junction to ambient versus copper surface under tab (typical values)

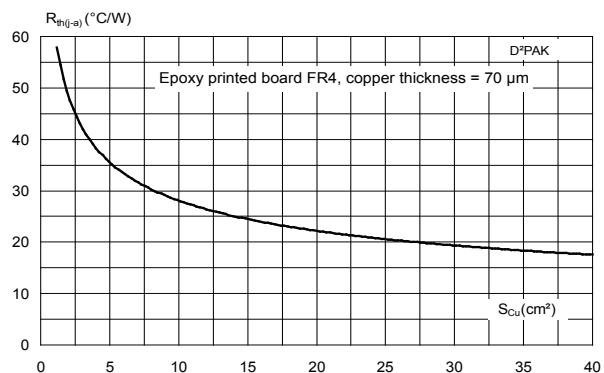


2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 D²PAK package information

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)


Figure 8. D²PAK package outline

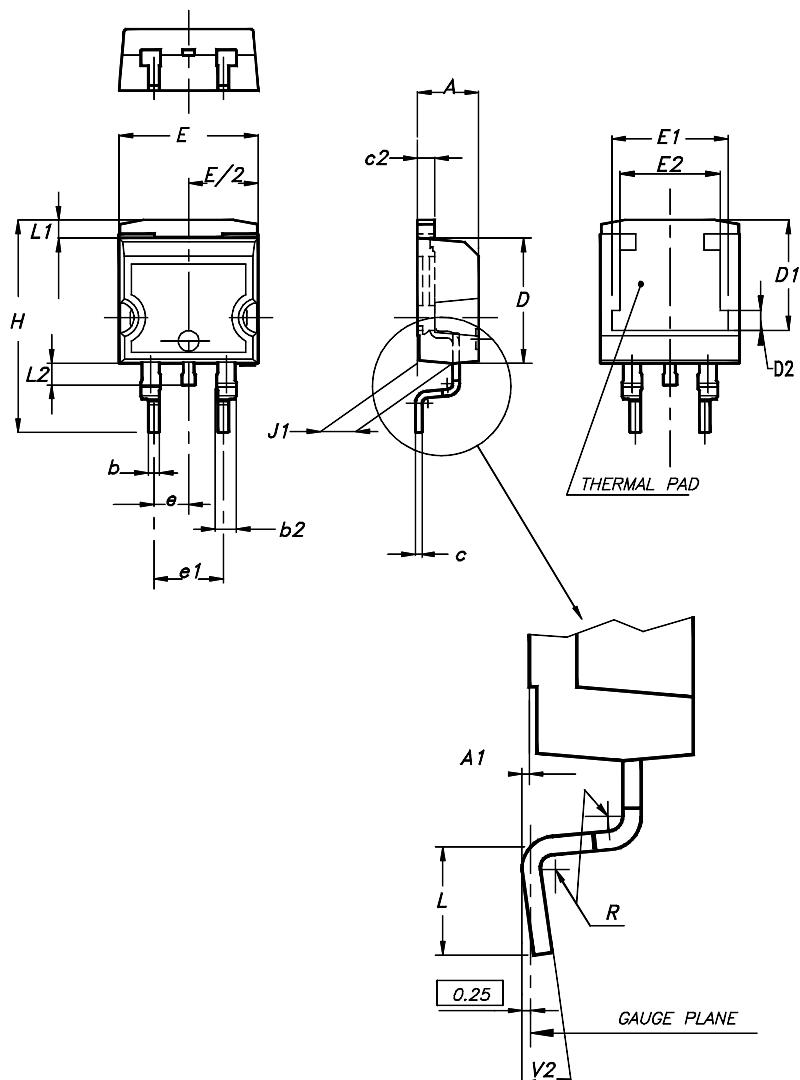

Note: This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

Table 4. D²PAK package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|-------|-----------------------------|-------|
| | Millimeters | | Inches (for reference only) | |
| | Min. | Max. | Min. | Max. |
| A | 4.36 | 4.60 | 0.172 | 0.181 |
| A1 | 0.00 | 0.25 | 0.000 | 0.010 |
| b | 0.70 | 0.93 | 0.028 | 0.037 |
| b2 | 1.14 | 1.70 | 0.045 | 0.067 |
| c | 0.38 | 0.69 | 0.015 | 0.027 |
| c2 | 1.19 | 1.36 | 0.047 | 0.053 |
| D | 8.60 | 9.35 | 0.339 | 0.368 |
| D1 | 6.90 | 8.00 | 0.272 | 0.311 |
| D2 | 1.10 | 1.50 | 0.043 | 0.060 |
| E | 10.00 | 10.55 | 0.394 | 0.415 |
| E1 | 8.10 | 8.90 | 0.319 | 0.346 |
| E2 | 6.85 | 7.25 | 0.266 | 0.282 |
| e | 2.54 typ. | | 0.100 | |
| e1 | 4.88 | 5.28 | 0.190 | 0.205 |
| H | 15.00 | 15.85 | 0.591 | 0.624 |
| J1 | 2.49 | 2.90 | 0.097 | 0.112 |
| L | 1.90 | 2.79 | 0.075 | 0.110 |
| L1 | 1.27 | 1.65 | 0.049 | 0.065 |
| L2 | 1.30 | 1.78 | 0.050 | 0.070 |
| R | 0.4 typ. | | 0.015 | |
| V2 | 0° | 8° | 0° | 8° |

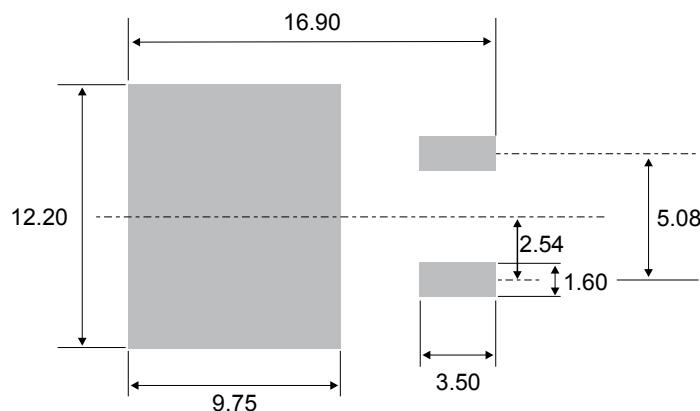Figure 9. D²PAK recommended footprint (dimensions in mm)

2.2 TO-220AB package information

- Epoxy meets UL 94,V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.55 N·m
- Maximum torque value: 0.70 N·m

Figure 10. TO-220AB package outline

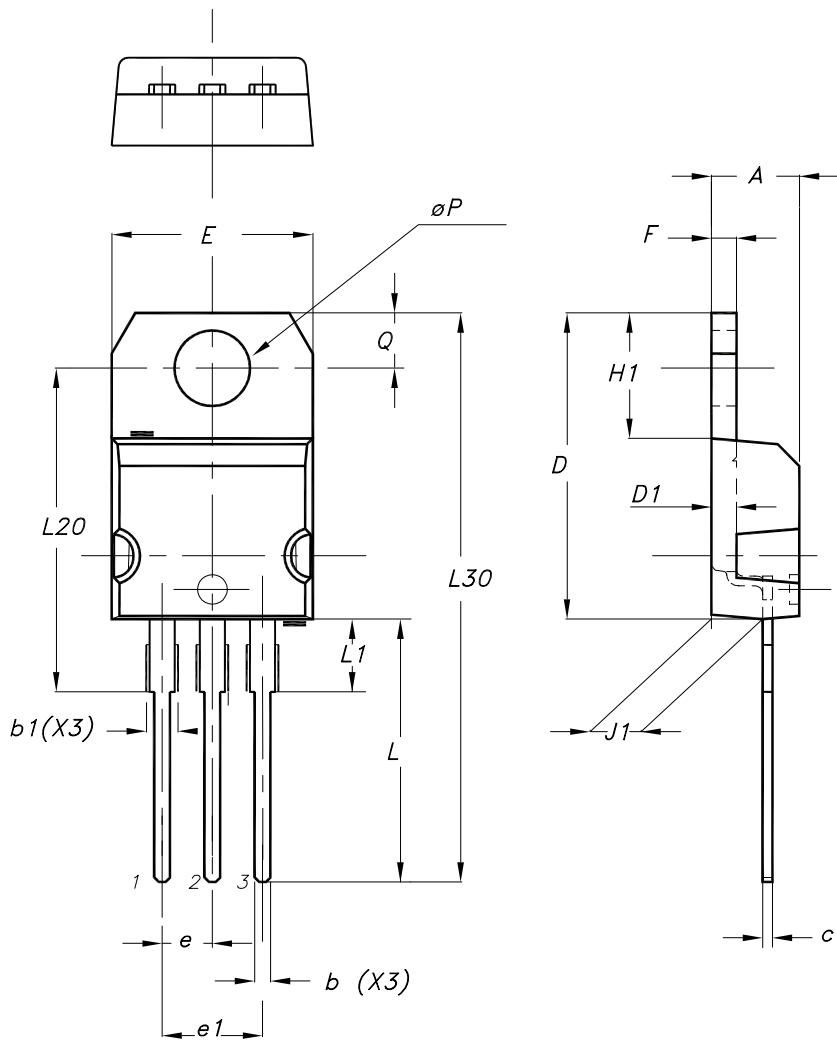


Table 5. TO-220AB package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|-------|-----------------------------|-------|
| | Millimeters | | Inches (for reference only) | |
| | Min. | Max. | Min. | Max. |
| A | 4.40 | 4.60 | 0.173 | 0.181 |
| b | 0.61 | 0.88 | 0.240 | 0.035 |
| b1 | 1.14 | 1.55 | 0.045 | 0.061 |
| c | 0.48 | 0.70 | 0.019 | 0.028 |
| D | 15.25 | 15.75 | 0.600 | 0.620 |
| D1 | 1.27 typ. | | 0.050 typ. | |
| E | 10.00 | 10.40 | 0.394 | 0.409 |
| e | 2.40 | 2.70 | 0.094 | 0.106 |
| e1 | 4.95 | 5.15 | 0.195 | 0.203 |
| F | 1.23 | 1.32 | 0.048 | 0.052 |
| H1 | 6.20 | 6.60 | 0.244 | 0.260 |
| J1 | 2.40 | 2.72 | 0.094 | 0.107 |
| L | 13.00 | 14.00 | 0.512 | 0.551 |
| L1 | 3.50 | 3.93 | 0.138 | 0.155 |
| L20 | 16.40 typ. | | 0.646 typ. | |
| L30 | 28.90 typ. | | 1.138 typ. | |
| θP | 3.75 | 3.85 | 0.148 | 0.152 |
| Q | 2.65 | 2.95 | 0.104 | 0.116 |

3 Ordering Information

Table 6. Ordering information

| Order code | Marking | Package | Weight | Base qty. | Delivery mode |
|----------------|-------------|--------------------|--------|-----------|---------------|
| STPS20L60CT | STPS20L60CT | TO-220AB | 1.95 g | 1000 | Tape and reel |
| STPS20L60CG-TR | STPS20L60CG | D ² PAK | 1.48 g | 50 | Tube |

Revision history

Table 7. Document revision history

| Date | Version | Changes |
|-------------|---------|--|
| Jul-2003 | 3C | Previous release |
| 02-Aug-2013 | 4 | Added TO-220AB narrow leads package. |
| 02-Dec-2020 | 5 | Removed I ² PAK package information. Updated D ² PAK package information. Added Application section. Minor text change. |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by STMicroelectronics manufacturer:

Other Similar products are found below :

[MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [RB551V-30](#)
[BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SK310-T](#)
[SK32A-LTP](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#)
[SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [SS15E-TP](#) [VS-6CWQ10FNHM3](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#)
[CDBQC0240LR-HF](#) [ACDBA340-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [SK310B-TP](#) [MA4E2502L-1246](#) [MA4E2502H-1246](#)
[NRVBM120ET1G](#) [NSR01L30MXT5G](#) [NTE573](#)