


## 1200 V, 15 A power Schottky silicon carbide diode

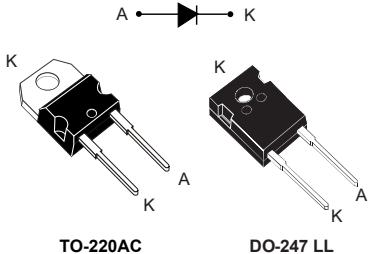

### Features

- No or negligible reverse recovery
- Switching behavior independent of temperature
- Robust high voltage periphery
- Operating from -40 °C to 175 °C
- Low  $V_F$
- ECOPACK<sup>2</sup> compliant component

### Applications

- EV charging stations
- Solar boost converters
- PV converters



### Description

The SiC diode, available in TO-220AC and TO-247 LL, is an ultrahigh performance power Schottky rectifier. It is manufactured using a silicon carbide substrate. The wide band-gap material allows the design of a low  $V_F$  Schottky diode structure with a 1200 V rating. Due to the Schottky construction, no recovery is shown at turn-off and ringing patterns are negligible. The minimal capacitive turn-off behavior is independent of temperature.

Product label								
Product status								
STPSC15H12								
Product summary								
<table border="1"> <tbody> <tr> <td><math>I_{F(AV)}</math></td> <td>15 A</td> </tr> <tr> <td><math>V_{RRM}</math></td> <td>1200 V</td> </tr> <tr> <td><math>T_j</math> (max.)</td> <td>175 °C</td> </tr> <tr> <td><math>V_F</math>(typ.)</td> <td>1.35 V</td> </tr> </tbody> </table>	$I_{F(AV)}$	15 A	$V_{RRM}$	1200 V	$T_j$ (max.)	175 °C	$V_F$ (typ.)	1.35 V
$I_{F(AV)}$	15 A							
$V_{RRM}$	1200 V							
$T_j$ (max.)	175 °C							
$V_F$ (typ.)	1.35 V							

## 1 Characteristics

**Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified)**

Symbol	Parameter		Value	Unit
V <sub>RRM</sub>	Repetitive peak reverse voltage ( $T_j = -40$ °C to +175 °C)		1200	V
I <sub>F(RMS)</sub>	Forward rms current		38	A
I <sub>F(AV)</sub>	Average forward current	TO-220AC, $T_C = 155$ °C, DC current <sup>(1)</sup>	15	A
		DO-247 LL, , $T_C = 150$ °C, DC current <sup>(1)</sup>		
I <sub>FRM</sub>	Repetitive peak forward current	TO-220AC, $T_C = 155$ °C, $T_j = 175$ °C, $\delta = 0.1$	58	A
		DO -247 LL, $T_C = 150$ °C, $T_j = 175$ °C, $\delta = 0.1$	61	
I <sub>FSM</sub>	Surge non repetitive forward current	$t_p = 10$ ms sinusoidal	$T_C = 25$ °C	105
			$T_C = 150$ °C	90
		$t_p = 10$ µs square	$T_C = 25$ °C	630
T <sub>stg</sub>	Storage temperature range		-65 to +175	°C
T <sub>j</sub>	Operating junction temperature range		-40 to +175	°C

1. Value based on  $R_{th(j-c)}$  max.

**Table 2. Thermal parameters**

Symbol	Parameter	Typ. value	Max. value	Unit
R <sub>th(j-c)</sub>	Junction to case	TO-220AC	0.45	0.6
		DO-247 LL	0.50	0.70 °C/W

For more information, please refer to the following application note:

- AN5088 : Rectifiers thermal management, handling and mounting recommendations

**Table 3. Static electrical characteristics**

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
I <sub>R</sub> <sup>(1)</sup>	Reverse leakage current	T <sub>j</sub> = 25 °C	V <sub>R</sub> = V <sub>RRM</sub>	-	7.5	90	µA
		T <sub>j</sub> = 150 °C		-	45	600	
V <sub>F</sub> <sup>(2)</sup>	Forward voltage drop	T <sub>j</sub> = 25 °C	I <sub>F</sub> = 15 A	-	1.35	1.50	V
		T <sub>j</sub> = 150 °C		-	1.75	2.25	

1. Pulse test:  $t_p = 10$  ms,  $\delta < 2\%$

2. Pulse test:  $t_p = 500$  µs,  $\delta < 2\%$

To evaluate the conduction losses use the following equation:

$$P = 1.09 \times I_{F(AV)} + 0.0775 \times I_F^2 \text{ (RMS)}$$

For more information, please refer to the following application notes related to the power losses:

- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode

**Table 4. Dynamic electrical characteristics**


Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$Q_{Cj}^{(1)}$	Total capacitive charge	$V_R = 800 \text{ V}$	-	94	-	nC
$C_j$	Total capacitance	$V_R = 0 \text{ V}, T_c = 25 \text{ }^\circ\text{C}, F = 1 \text{ MHz}$	-	1200	-	pF
		$V_R = 800 \text{ V}, T_c = 25 \text{ }^\circ\text{C}, F = 1 \text{ MHz}$	-	78	-	

1.


$$\text{Most accurate value for the capacitive charge: } Q_{Cj}(V_R) = \int_0^{V_R} C_j(V) dV$$

## 1.1 Characteristics (curves)


**Figure 1. Forward voltage drop versus forward current (typical values)**

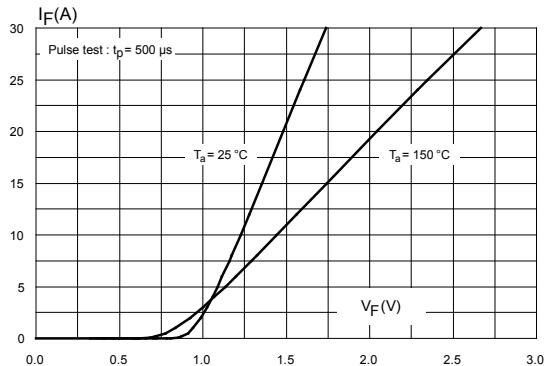


**Figure 2. Reverse leakage current versus reverse voltage applied (typical values)**

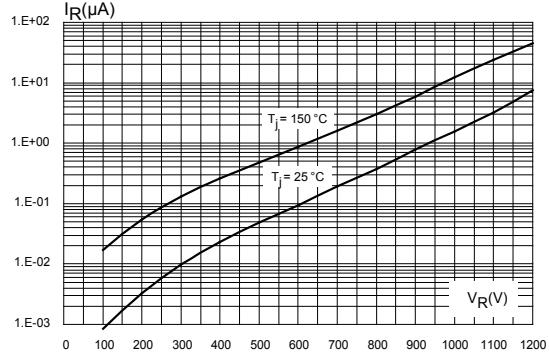


**Figure 3. Peak forward current versus case temperature (TO-220AC)**

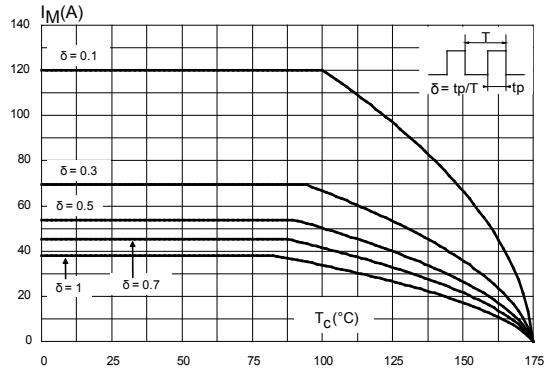


**Figure 4. Peak forward current versus case temperature (DO-247 LL)**

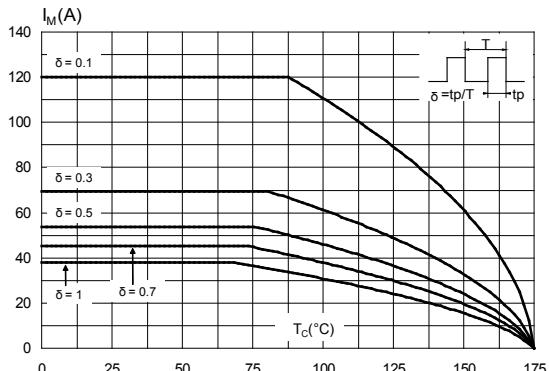


**Figure 5. Junction capacitance versus reverse voltage applied (typical values)**

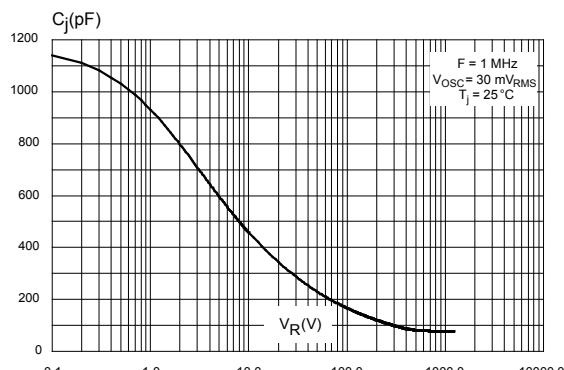


**Figure 6. Relative variation of thermal impedance junction to case versus pulse duration (TO-220AC)**

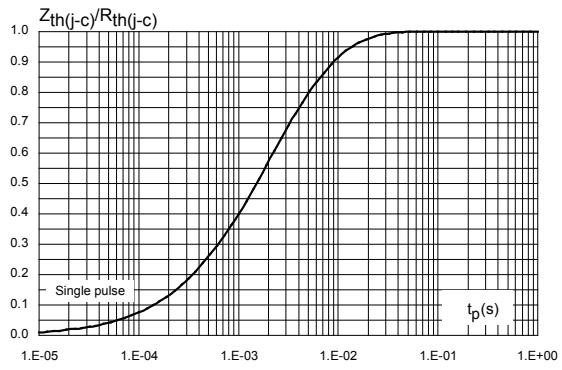


**Figure 7. Relative variation of thermal impedance junction to case versus pulse duration (DO-247 LL)**

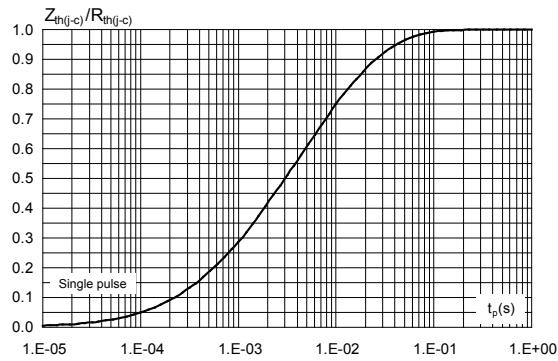

**Figure 8. Non-repetitive peak surge forward current versus pulse duration (sinusoidal waveform)**

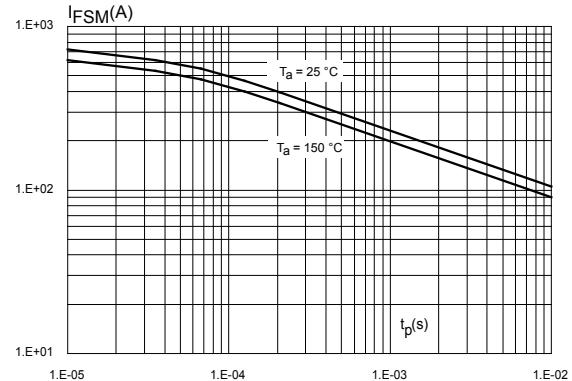

**Figure 9. Total capacitive charges versus reverse voltage applied (typical values)**

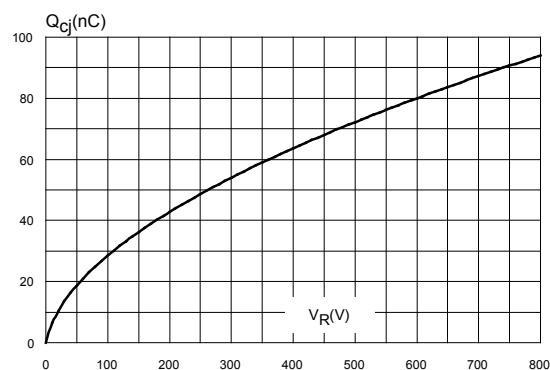


## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 2.1 TO-220AC package information

- Epoxy meets UL 94,V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.55 N·m
- Maximum torque value: 0.70 N·m

Figure 10. TO-220AC package outline

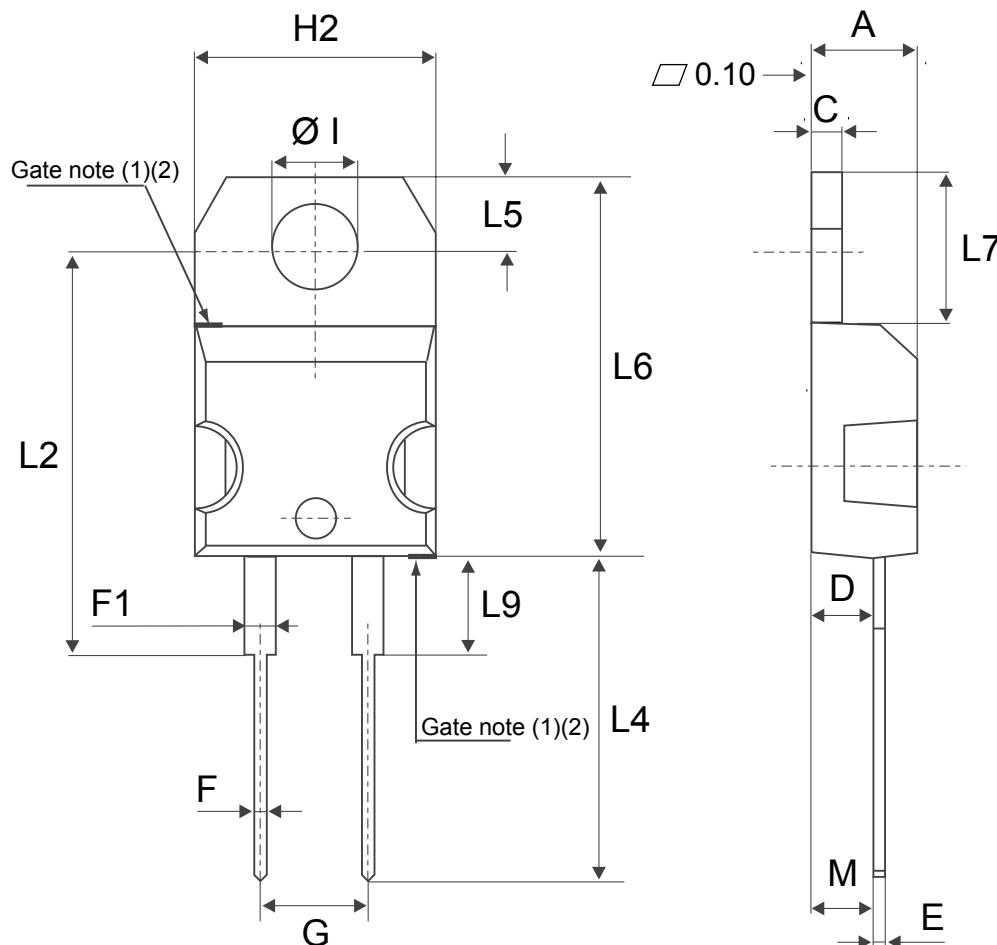

(1) :Max resin gate protusion 0.5 mm

(2) :Resin gate position is accepted in each of the two positions shown on the drawings or their symmetrical


Table 5. TO-220AC package mechanical data

Ref.	Dimensions			
	Millimeters		Inches (for reference only)	
	Min.	Max.	Min.	Max.
A	4.40	4.60	0.173	0.181
C	1.23	1.32	0.048	0.051
D	2.40	2.72	0.094	0.107
E	0.49	0.70	0.019	0.027
F	0.61	0.88	0.024	0.034
F1	1.14	1.70	0.044	0.066
G	4.95	5.15	0.194	0.202
H2	10.00	10.40	0.393	0.409
L2	16.40 typ.		0.645 typ.	
L4	13.00	14.00	0.511	0.551
L5	2.65	2.95	0.104	0.116
L6	15.25	15.75	0.600	0.620
L7	6.20	6.60	0.244	0.259
L9	3.50	3.93	0.137	0.154
M	2.60 typ.		0.102 typ.	
Diam	3.75	3.85	0.147	0.151

## 2.2 DO-247 LL package information

- Epoxy meets UL94, VO
- Cooling method: by conduction (C)
- Recommended torque value: 0.8 N·m
- Maximum torque value: 1.0 N·m

Figure 11. DO-247 LL package outline

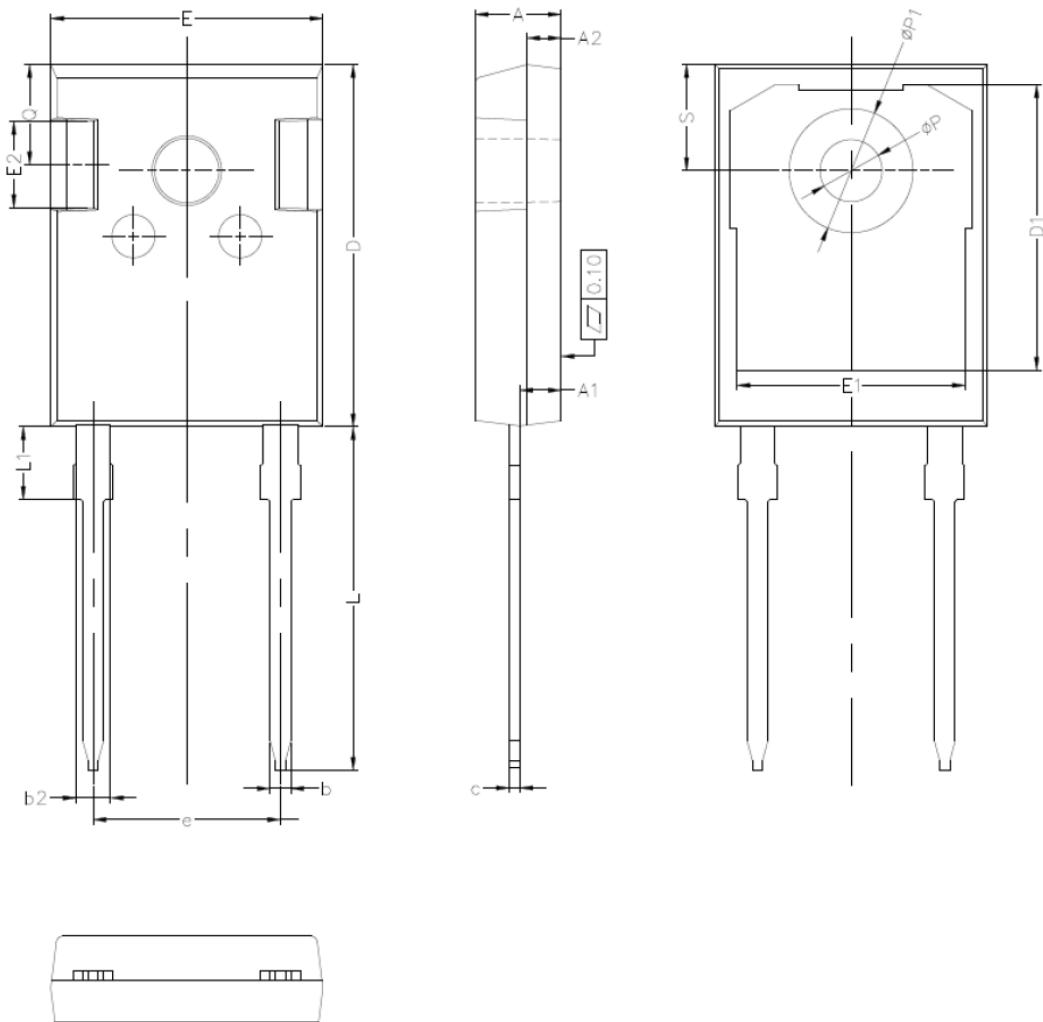

Note: This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

Table 6. DO-247 LL package mechanical data

Ref.	Dimensions			
	Millimeters		Inches (for reference only)	
	Min.	Max.	Min.	Max.
A	4.70	5.31	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
c	0.38	0.89	0.015	0.035
D	20.80	21.46	0.819	0.845
D1	13.08		0.515	
E	15.49	16.26	0.610	0.640
e	10.88 typ.		0.428	
E1	13.06		0.514	
E2	3.43	5.10	0.135	0.200
L	19.80	20.32	0.779	0.800
L1		4.50		0.177
P	3.50	3.70	0.137	0.146
P1	7.00	7.40	0.275	0.292
Q	5.38	6.20	0.219	0.244
S	6.16 typ.		0.243	

### 3 Ordering information

**Table 7. Ordering information**

Order code	Marking	Package	Weight	Base qty.	Delivery mode
STPSC15H12D	STPSC15H12D	TO-220AC	1.86 g	50	Tube
STPSC15H12WL	STPSC15H12WL	DO-247 LL	5.9 g	30	Tube

## Revision history

**Table 8. Document revision history**

Date	Revision	Changes
10-May-2016	1	Initial version
05-Sep-2017	2	Added DO-247 LL package. Updated Section "Features", Section 1:"Characteristics" and Table 8: "Ordering information".
03-Apr-2018	3	Updated Section 2.2 DO-247 LL package information.
23-Jun-2021	4	Added Section STPOWER, Section Sustainable technology and Applications. Updated Table 4 and Section 2.2 DO-247 LL package information.

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by STMicroelectronics manufacturer:***

Other Similar products are found below :

[MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [RB551V-30](#)  
[BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SK310-T](#)  
[SK32A-LTP](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#)  
[SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [SS15E-TP](#) [VS-6CWQ10FNHM3](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#)  
[CDBQC0240LR-HF](#) [ACDBA340-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [SK310B-TP](#) [MA4E2502L-1246](#) [MA4E2502H-1246](#)  
[NRVBM120ET1G](#) [NSR01L30MXT5G](#) [NTE573](#)