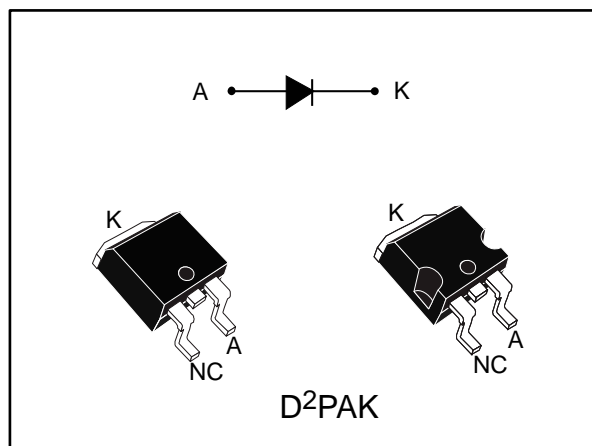


High efficiency rectifier

Datasheet - production data


Features

- Ultrafast recovery
- Low power losses
- High surge capability
- Low leakage current
- High junction temperature
- ECOPACK®2 compliant component for D2PAK on demand

Description

The device is an ultrafast recovery power rectifier dedicated to energy recovery in PDP application.

It is especially designed for clamping function in energy recovery block.

The compromise between forward voltage drop and recovery time offers optimized performance.

Table 1: Device summary

| Symbol | Value |
|------------------------|--------|
| $I_{F(\text{peak})}$ | 10 A |
| V_{RRM} | 400 V |
| $T_j (\text{max})$ | 175 °C |
| $V_F (\text{typ})$ | 1.15 V |
| $t_{rr} (\text{typ.})$ | 15 ns |

1 Characteristics

Table 2: Absolute ratings (limiting values, at 25 °C, unless otherwise specified)

| Symbol | Parameter | | Value | Unit |
|---------------|--|---|-------------|------|
| V_{RRM} | Repetitive peak reverse voltage | | 400 | V |
| $I_{F(RMS)}$ | Forward rms current | | 20 | A |
| $I_{F(peak)}$ | Peak working forward current | $T_C = 135\text{ °C}$ $\delta = 0.5$ square wave | 10 | A |
| I_{FSM} | Surge non repetitive forward current | $t_p = 10$ ms sinusoidal | 100 | A |
| T_{stg} | Storage temperature range | | -65 to +175 | °C |
| T_j | Maximum operating junction temperature | | 175 | °C |

Table 3: Thermal parameter

| Symbol | Parameter | Max. value | Unit |
|---------------|------------------|------------|------|
| $R_{th(j-c)}$ | Junction to case | 3.5 | °C/W |

Table 4: Static electrical characteristics

| Symbol | Parameter | Test conditions | | Min. | Typ. | Max. | Unit |
|-------------|-------------------------|-----------------------|---------------------|------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25\text{ °C}$ | $V_R = V_{RRM}$ | - | | 10 | μA |
| | | $T_j = 125\text{ °C}$ | | - | 10 | 100 | |
| $V_F^{(2)}$ | Forward voltage drop | $T_j = 25\text{ °C}$ | $I_F = 10\text{ A}$ | - | 1.50 | 1.70 | V |
| | | $T_j = 125\text{ °C}$ | | - | 1.15 | 1.35 | |

Notes:

(1)Pulse test: $t_p = 5\text{ ms}$, $\delta < 2\%$

(2)Pulse test: $t_p = 380\text{ }\mu\text{s}$, $\delta < 2\%$







To evaluate the conduction losses, use the following equation:







$$P = 1.05 \times I_{F(AV)} + 0.03 \times I_{F(RMS)}^2$$

Table 5: Dynamic electrical characteristics

| Symbol | Parameter | Test conditions | | Min. | Typ. | Max. | Unit |
|--------------|--------------------------|-----------------------|--|------|------|------|------|
| t_{rr} | Reverse recovery time | $T_j = 25\text{ °C}$ | $I_F = 0.5\text{ A},$ $I_{rr} = 0.25\text{ A},$ $I_R = 1\text{ A}$ | - | 15 | 20 | ns |
| | | | $I_F = 1\text{ A},$ $V_R = 30\text{ V},$ $di_F/dt = -50\text{ A}/\mu\text{s}$ | - | | 40 | |
| t_{fr} | Forward recovery time | $T_j = 25\text{ °C}$ | $I_F = 10\text{ A},$ $di_F/dt = 100\text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$ | - | | 140 | ns |
| V_{FP} | Forward recovery voltage | $T_j = 25\text{ °C}$ | $I_F = 10\text{ A},$ $di_F/dt = 100\text{ A}/\mu\text{s}$ | - | | 3 | V |
| I_{RM} | Reverse recovery current | $T_j = 125\text{ °C}$ | $I_F = 10\text{ A},$ $V_R = 200\text{ V}$ $di_F/dt = 200\text{ A}/\mu\text{s}$ | - | 6.2 | 8.0 | A |
| S_{factor} | Softness factor | | | - | 0.3 | | - |

1.1 Characteristics (curves)

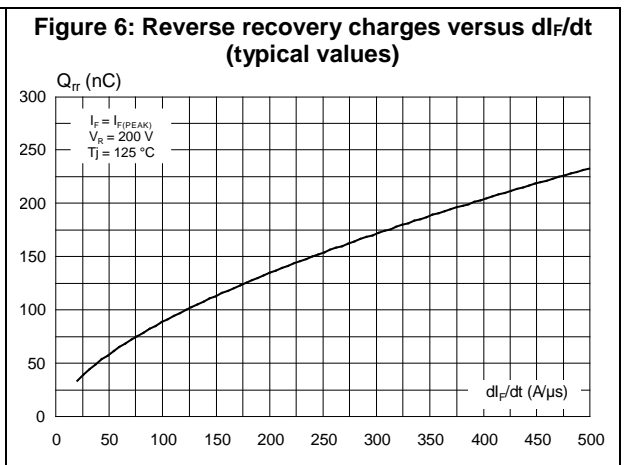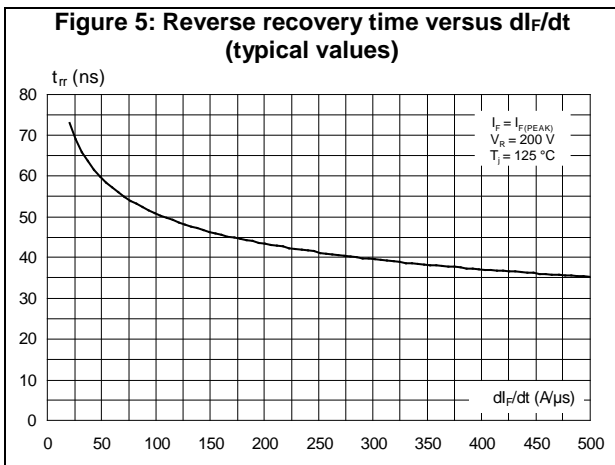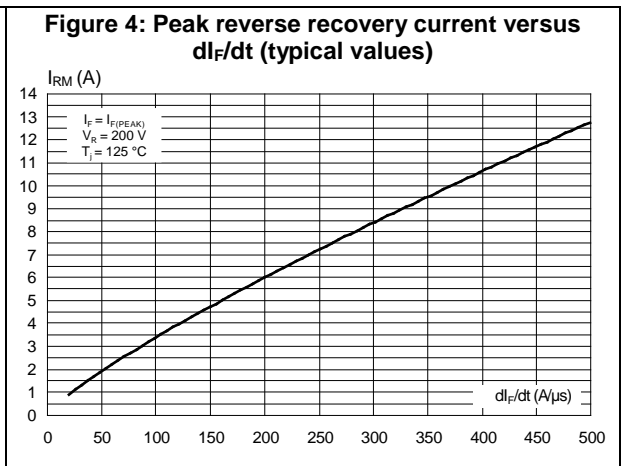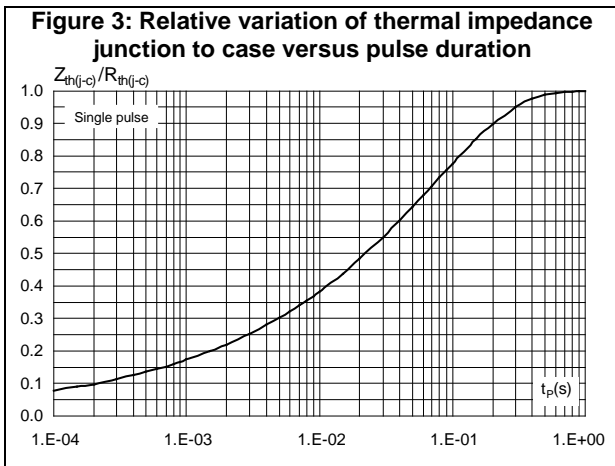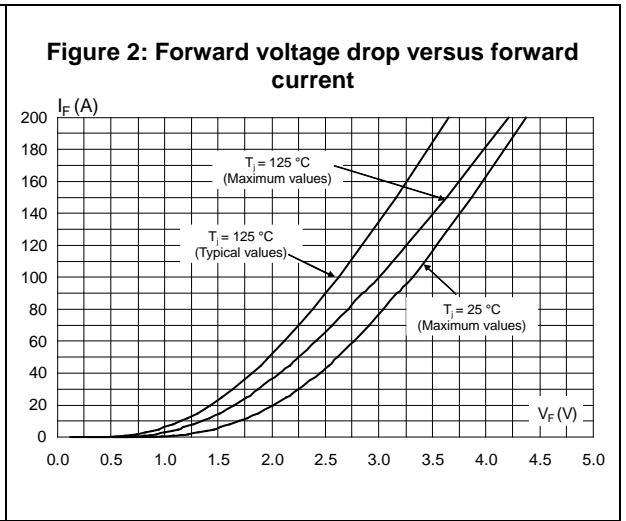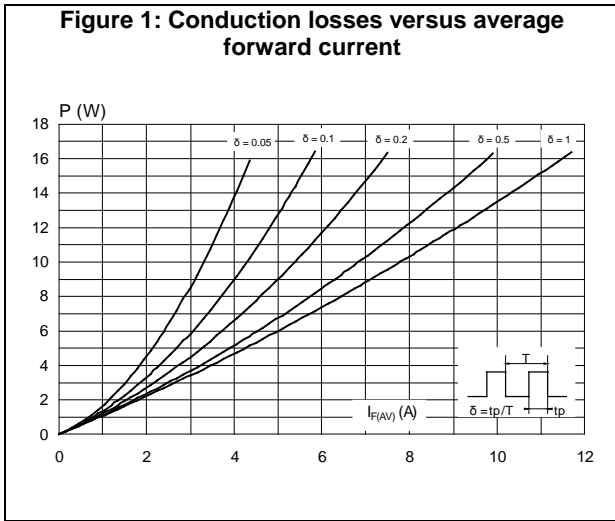

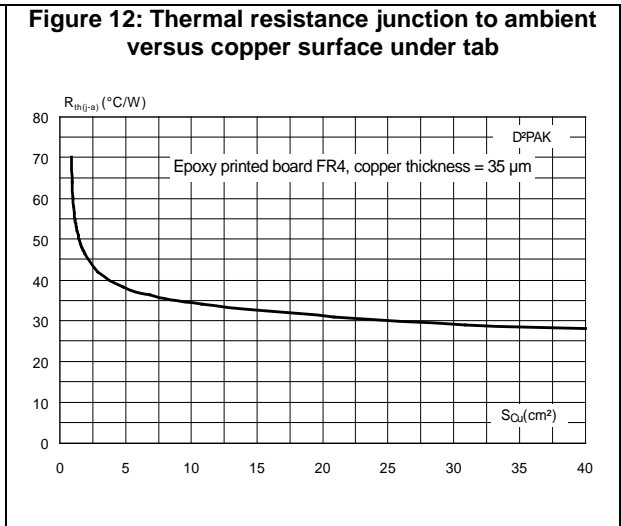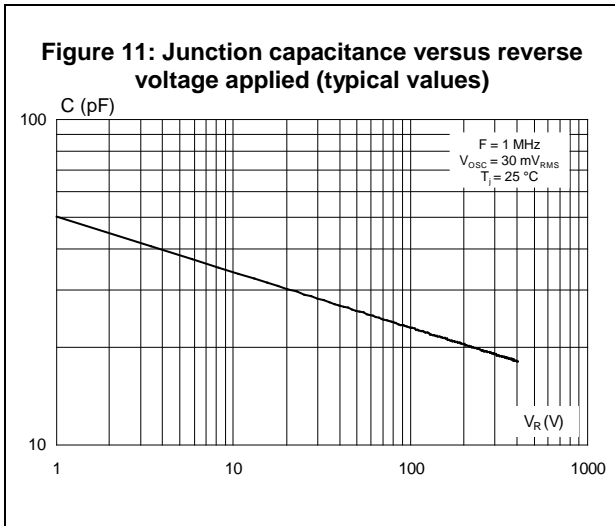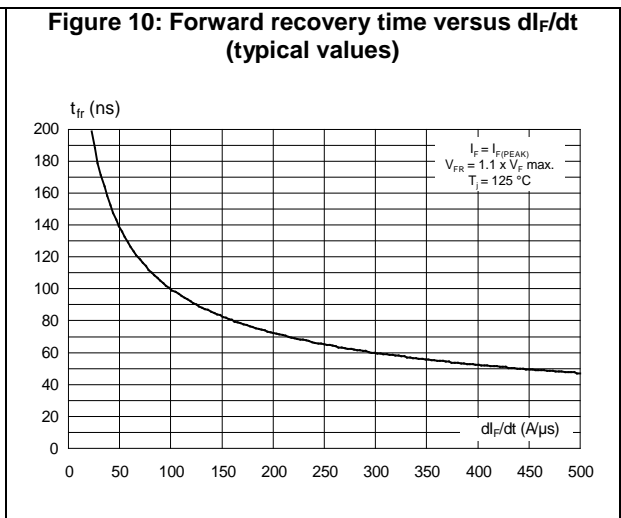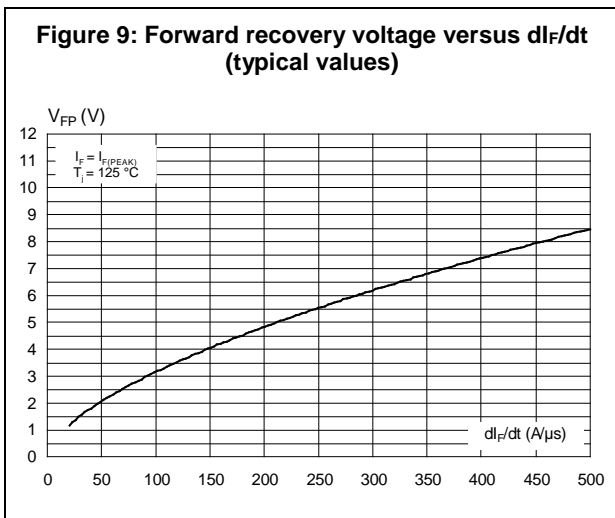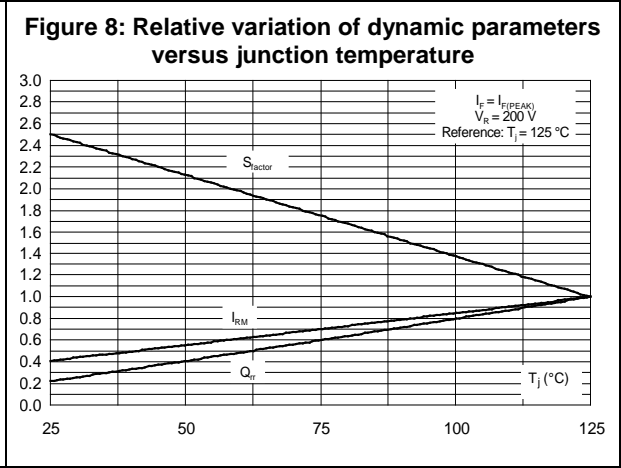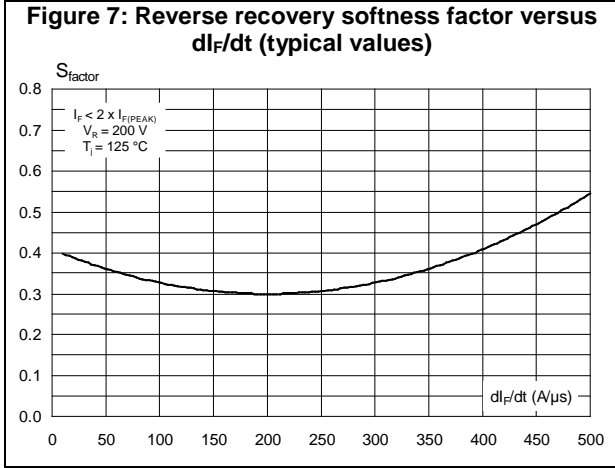


2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

- Cooling method: by conduction (C)
- Epoxy meets UL94,V0

2.1 D²PAK package information

Figure 13: D²PAK package outline

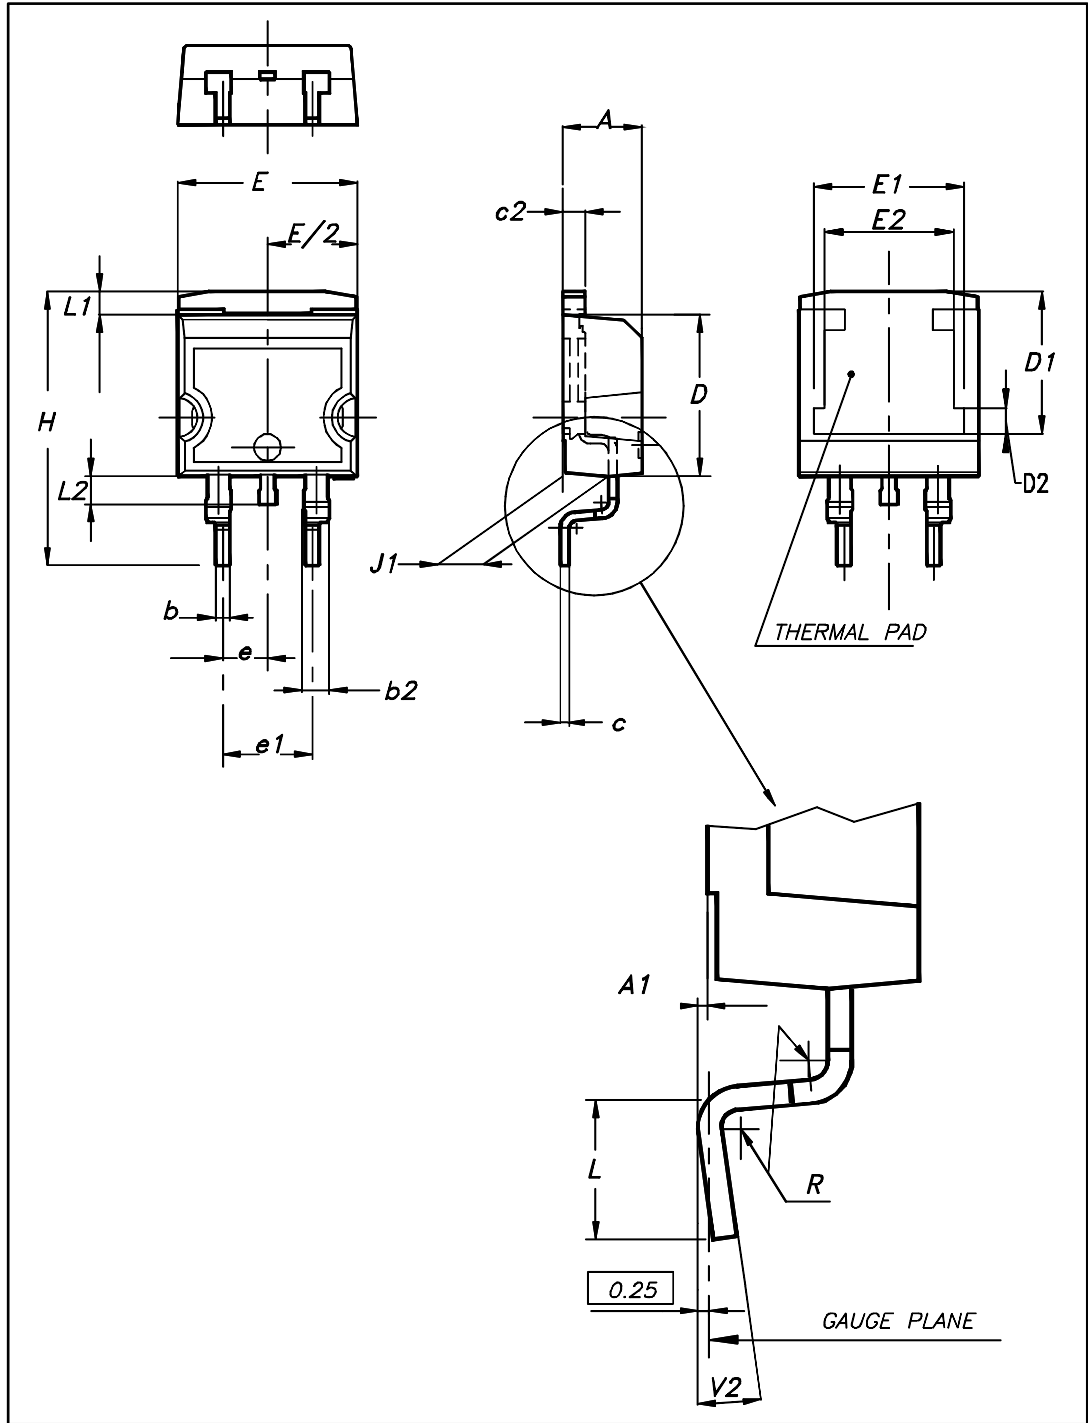


This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

Table 6: D²PAK package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|-------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 4.36 | 4.60 | 0.172 | 0.181 |
| A1 | 0.00 | 0.25 | 0.000 | 0.010 |
| b | 0.70 | 0.93 | 0.028 | 0.037 |
| b2 | 1.14 | 1.70 | 0.045 | 0.067 |
| c | 0.38 | 0.69 | 0.015 | 0.027 |
| c2 | 1.19 | 1.36 | 0.047 | 0.053 |
| D | 8.60 | 9.35 | 0.339 | 0.368 |
| D1 | 6.90 | 8.00 | 0.272 | 0.311 |
| D2 | 1.10 | 1.50 | 0.043 | 0.060 |
| E | 10.00 | 10.55 | 0.394 | 0.415 |
| E1 | 8.10 | 8.90 | 0.319 | 0.346 |
| E2 | 6.85 | 7.25 | 0.266 | 0.282 |
| e | 2.54 typ. | | 0.100 | |
| e1 | 4.88 | 5.28 | 0.190 | 0.205 |
| H | 15.00 | 15.85 | 0.591 | 0.624 |
| J1 | 2.49 | 2.90 | 0.097 | 0.112 |
| L | 1.90 | 2.79 | 0.075 | 0.110 |
| L1 | 1.27 | 1.65 | 0.049 | 0.065 |
| L2 | 1.30 | 1.78 | 0.050 | 0.070 |
| R | 0.4 typ. | | 0.015 | |
| V2 | 0° | 8° | 0° | 8° |

Figure 14: D²PAK recommended footprint (dimensions in mm)

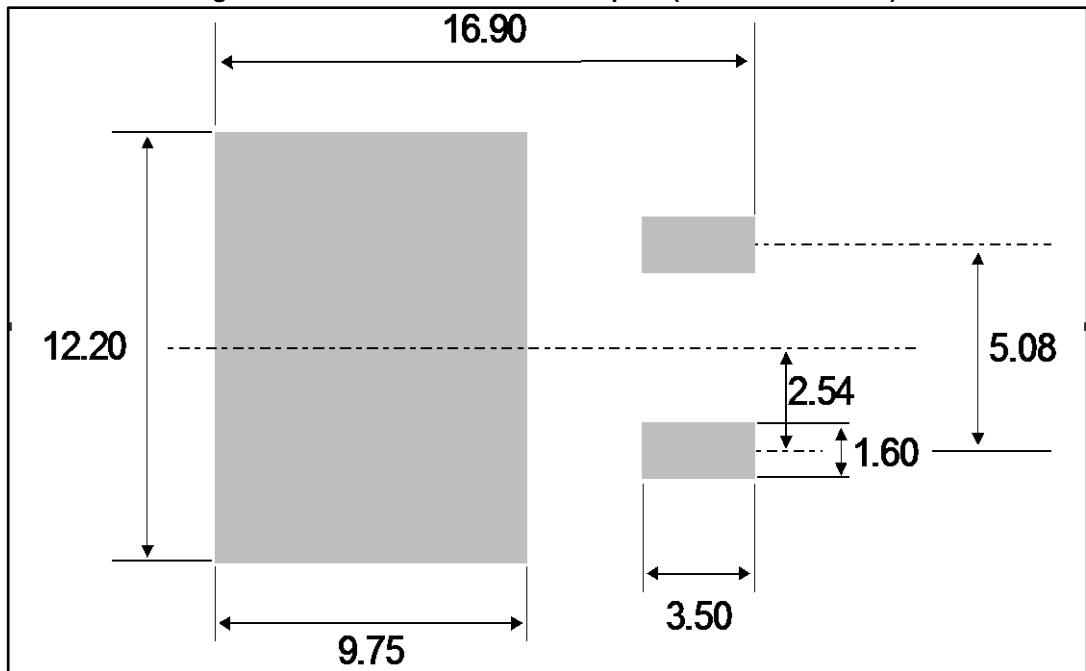

3 Ordering information

Table 7: Ordering information

| Order code | Marking | Package | Weight | Base qty. | Delivery mode |
|---------------|------------|--------------------|--------|-----------|---------------|
| STTH10R04G-TR | STTH10R04G | D ² PAK | 1.38 g | 1000 | Tape and reel |

4 Revision history

Table 8: Document revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 07-Nov-2007 | 1 | First issue. |
| 08-Aug-2017 | 2 | Updated features and package silhouette. Minor text changes to improve readability. Updated Section 1: "Characteristics" , Section 1.1: "Characteristics (curves)" , Section 2: "Package information" and Section 3: "Ordering information" . |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [STMicroelectronics](#) manufacturer:

Other Similar products are found below :

[D91A](#) [DA24F4100L](#) [DD89N1600K-A](#) [DD89N16K-K](#) [RL252-TP](#) [DSEI2X30-06C](#) [1N4005-TR](#) [BAV199-TP](#) [UFS120Je3/TR13](#)

[JANS1N6640US](#) [DD89N16K](#) [DD89N16K-A](#) [481235F](#) [067907F](#) [MS306](#) [ND104N08K](#) [SPA2003-B-D-A01](#) [US2JFL-TP](#) [UFS105Je3/TR13](#)

[A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#) [RF301B2STL](#) [RF501B2STL](#) [UES1306](#) [UES1302](#) [BAV199E6433HTMA1](#) [ACGRC307-HF](#)

[ACEFC304-HF](#) [JANTXV1N5660A](#) [UES1106](#) [GS2K-LTP](#) [D126A45C](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [STTH20P035FP](#)

[VS-8EWS12S-M3](#) [VS-12FL100S10](#) [ACGRA4001-HF](#) [MUR420GP-TP](#) [1N5404GP-E3/54](#) [ND89N08K](#) [D1821SH45T PR](#) [D1251S45T](#)

[JANTX1N3890](#) [SKN20/16](#) [SKN70/16](#)