


High efficiency rectifier

Datasheet - production data

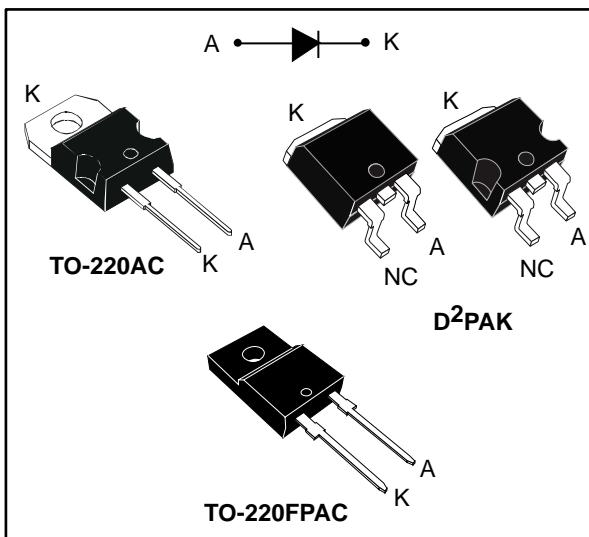

Description

This device is an ultrafast recovery power rectifier dedicated to energy recovery in PDP applications.

Especially designed for the clamping function in energy recovery blocks, the performance is optimized thanks to a compromise between forward voltage drop and recovery time.

Table 1: Device summary

| Symbol | Value |
|-----------------|--------|
| $I_{F(AV)}$ | 20 A |
| V_{RRM} | 400 V |
| T_j (max.) | 175 °C |
| V_F (typ.) | 1.15 V |
| t_{rr} (typ.) | 18 ns |

Features

- Ultrafast recovery
- Low power losses
- High surge capability
- Low leakage current
- High junction temperature
- Insulated package: TO-220FPAC
 - insulating voltage: 2000 V_{RMS} sine
- ECOPACK®2 compliant component for D²PAK on demand

1 Characteristics

Table 2: Absolute ratings (limiting values, at 25 °C, unless otherwise specified)

| Symbol | Parameter | | | Value | Unit |
|----------------------|--|-----------------------------------|-------------------------|-------------|------|
| V _{RRM} | Repetitive peak reverse voltage | | | 400 | V |
| I _{F(RMS)} | Forward rms current | | | 50 | A |
| I _{F(peak)} | Peak working forward current δ = 0.5, square wave | TO-220AC, D ² PAK | T _C = 135 °C | 20 | A |
| | | TO-220FPAC | T _C = 105 °C | | |
| I _{FSM} | Surge non repetitive forward current | t _p = 10 ms sinusoidal | | 150 | A |
| T _{stg} | Storage temperature range | | | -65 to +175 | °C |
| T _j | Maximum operating junction temperature | | | 175 | °C |

Table 3: Thermal parameter

| Symbol | Parameter | | Max. value | Unit |
|----------------------|------------------|------------------------------|------------|------|
| R _{th(j-c)} | Junction to case | TO-220AC, D ² PAK | 2.8 | °C/W |
| | | TO-220FPAC | 5 | |

Table 4: Static electrical characteristics

| Symbol | Parameter | Test conditions | | Min. | Typ. | Max. | Unit |
|-------------------------------|-------------------------|-------------------------|-----------------------------------|------|------|------|------|
| I _R ⁽¹⁾ | Reverse leakage current | T _j = 25 °C | V _R = V _{RRM} | - | | 20 | µA |
| | | T _j = 125 °C | | - | 20 | 200 | |
| V _F ⁽²⁾ | Forward voltage drop | T _j = 25 °C | I _F = 20 A | - | 1.50 | 1.70 | V |
| | | T _j = 125 °C | | - | 1.15 | 1.35 | |

Notes:(1)Pulse test: t_p = 5 ms, δ < 2%(2)Pulse test: t_p = 380 µs, δ < 2%

To evaluate the conduction losses use the following equation:

$$P = 1.05 \times I_{F(AV)} + 0.015 \times I_{F^2(RMS)}$$

Table 5: Dynamic electrical characteristics

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit | |
|--------------|--------------------------|------------------------------------|--|------|------|------|----|
| t_{rr} | Reverse recovery time | $T_j = 25 \text{ }^\circ\text{C}$ | $I_F = 0.5 \text{ A},$ $I_{rr} = 0.25 \text{ A},$ $I_R = 1 \text{ A}$ | - | 18 | 25 | ns |
| | | | $I_F = 1 \text{ A},$ $V_R = 30 \text{ V},$ $dI_F/dt = -50 \text{ A}/\mu\text{s}$ | - | 35 | 45 | |
| t_{fr} | Forward recovery time | $T_j = 25 \text{ }^\circ\text{C}$ | $I_F = 20 \text{ A},$ $dI_F/dt = 100 \text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$ | - | | 150 | ns |
| V_{FP} | Forward recovery voltage | | $I_F = 20 \text{ A},$ $dI_F/dt = 100 \text{ A}/\mu\text{s}$ | - | 1.7 | 2.5 | V |
| I_{RM} | Reverse recovery current | $T_j = 125 \text{ }^\circ\text{C}$ | $I_F = 20 \text{ A},$ $dI_F/dt = -200 \text{ A}/\mu\text{s}$ | - | 8 | 11 | A |
| S_{factor} | Softness factor | | $V_R = 200 \text{ V}$ | - | 0.3 | | - |

1.1 Characteristics (curves)

Figure 1: Conduction losses versus average forward current

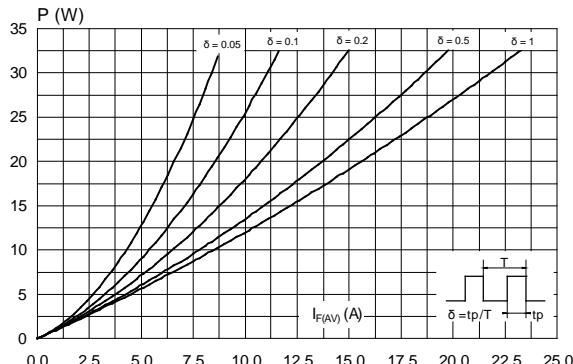


Figure 2: Forward voltage drop versus forward current

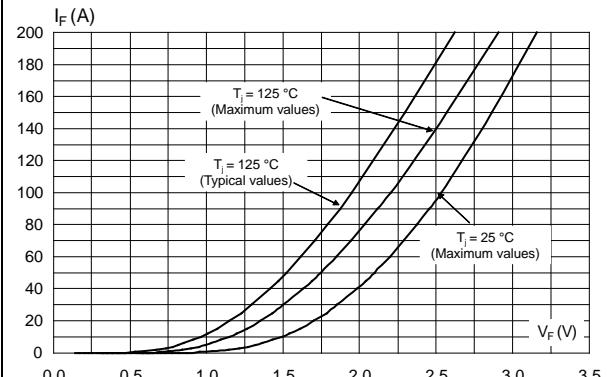


Figure 3: Relative variation of thermal impedance junction to case versus pulse duration (TO-220AC, D²PAK)

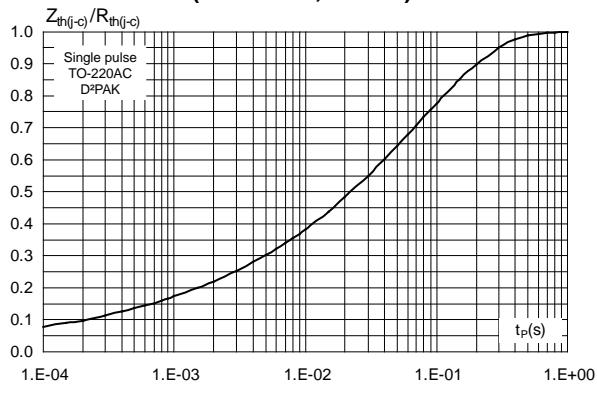


Figure 4: Relative variation of thermal impedance junction to case versus pulse duration (TO-220FPAC)

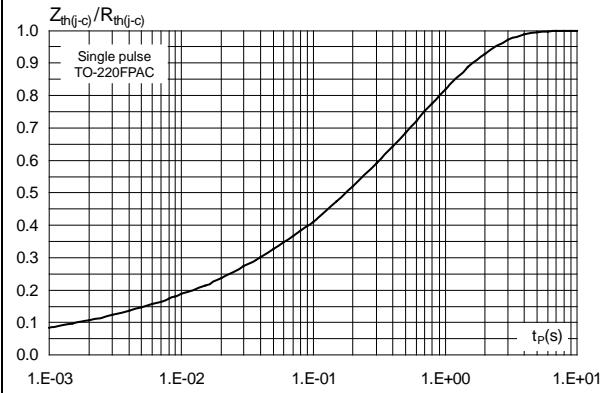


Figure 5: Peak reverse recovery current versus dI_F/dt (typical values)

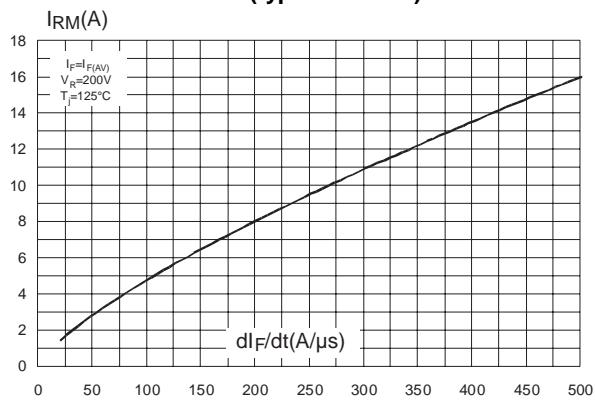


Figure 6: Reverse recovery time versus dI_F/dt (typical values)

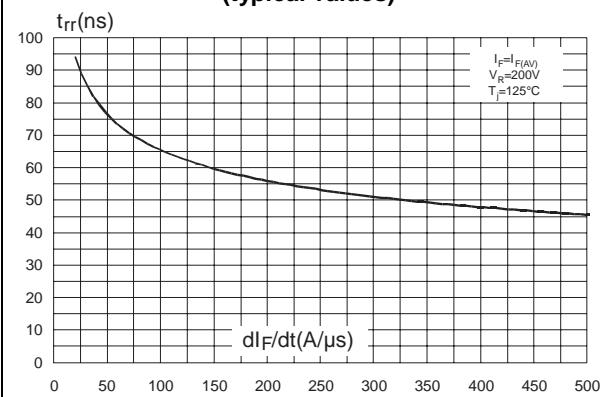


Figure 7: Reverse recovery charges versus dI_F/dt (typical values)

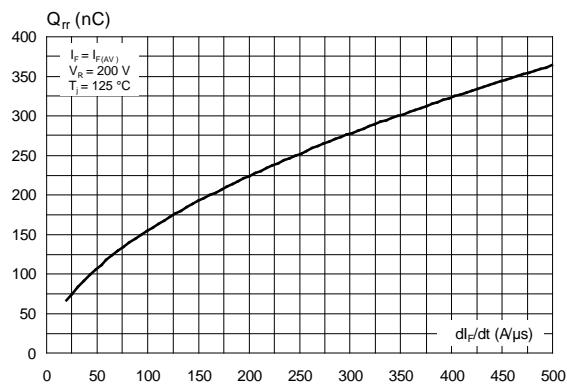


Figure 8: Reverse recovery softness factor versus dI_F/dt (typical values)

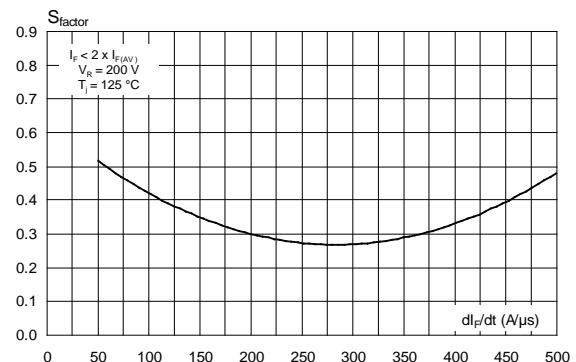


Figure 9: Relative variation of dynamic parameters versus junction temperature

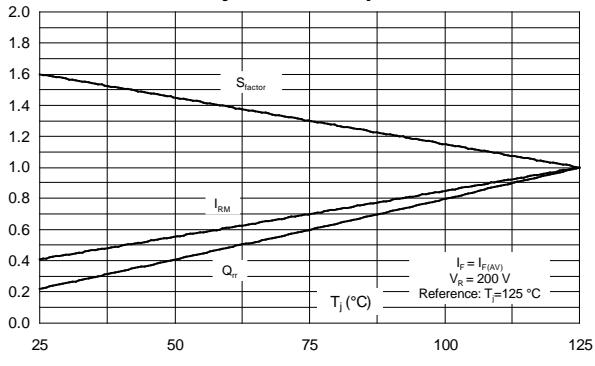


Figure 10: Transient peak forward voltage versus dI_F/dt (typical values)

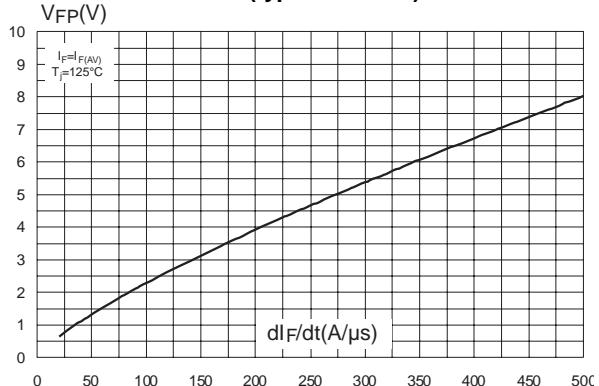


Figure 11: Forward recovery time versus dI_F/dt (typical values)

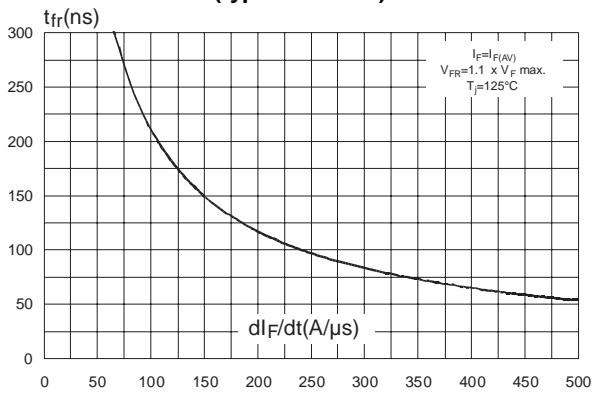


Figure 12: Junction capacitance versus reverse voltage applied (typical values)

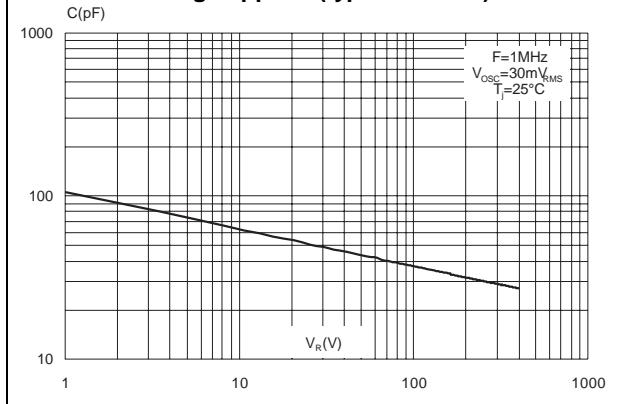
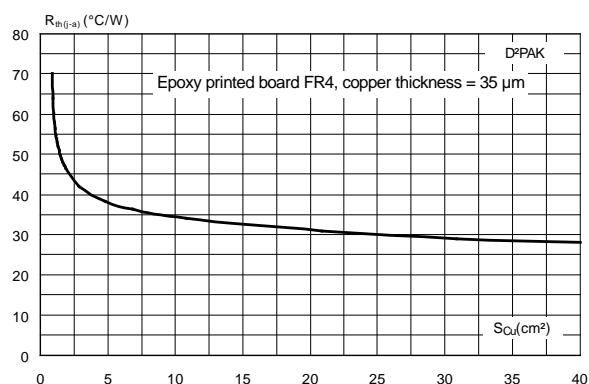


Figure 13: Thermal resistance junction to ambient versus copper surface under tab for D²PAK


2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com.
ECOPACK® is an ST trademark.

- Cooling method: by conduction (C)
- Epoxy meets UL94,V0
- Recommended torque value: 0.55 N.m (for TO-220AC and TO-220FPAC)
- Maximum torque value: 0.70 N.m (for TO-220AC and TO-220FPAC)

2.1 D²PAK package information


Figure 14: D²PAK package outline

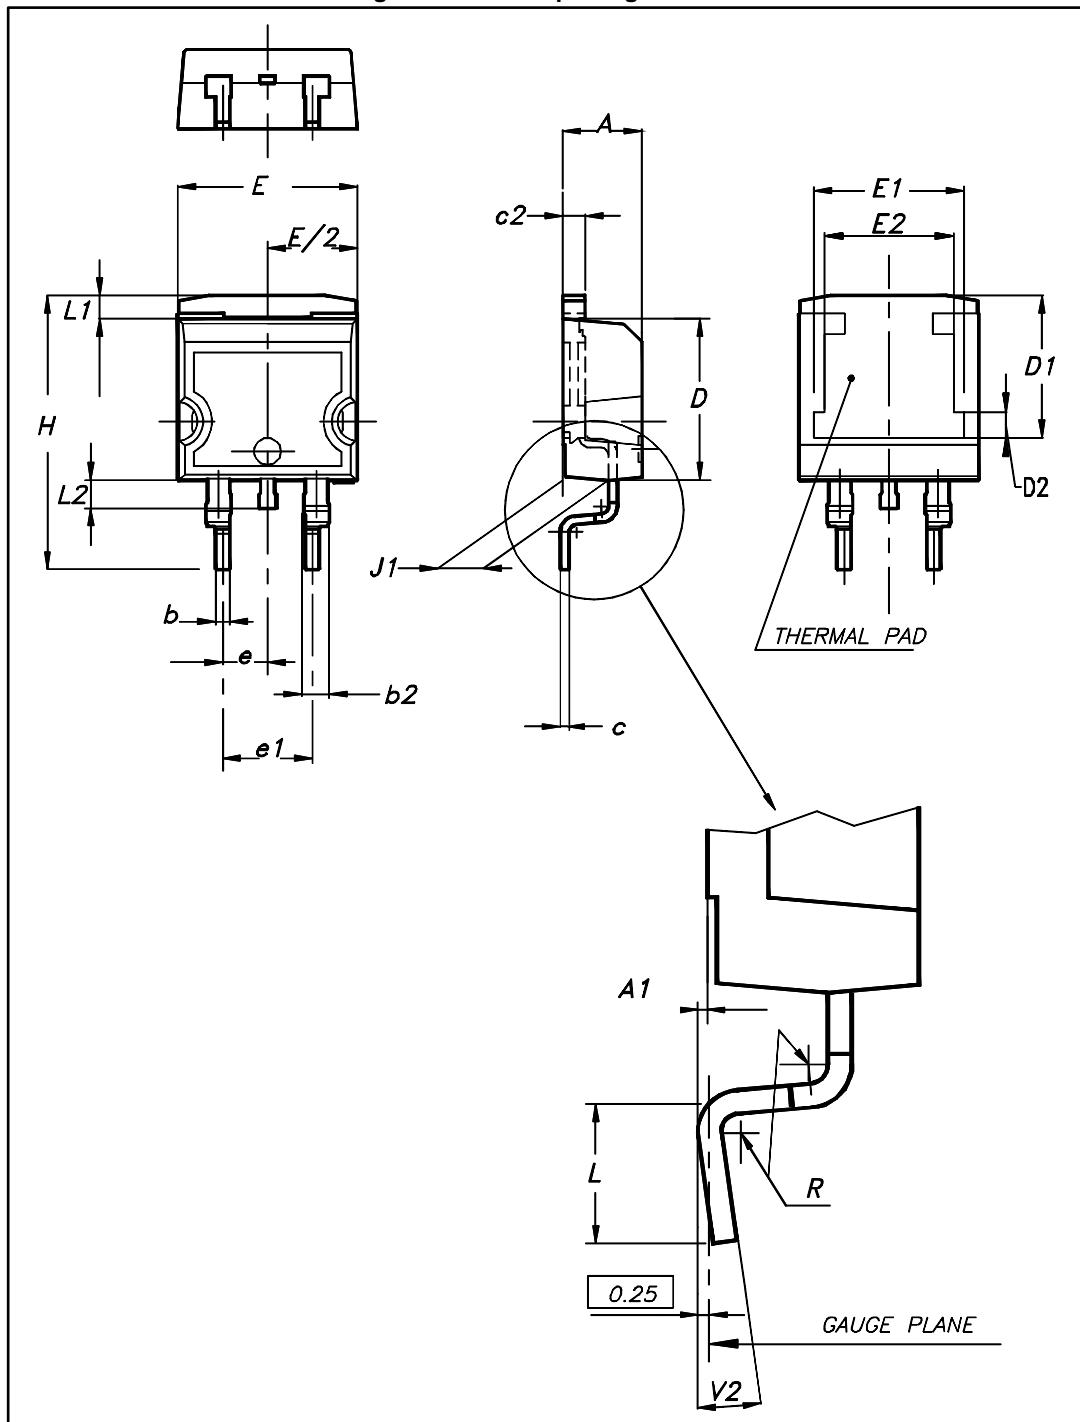

This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

Table 6: D²PAK package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|-------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 4.36 | 4.60 | 0.172 | 0.181 |
| A1 | 0.00 | 0.25 | 0.000 | 0.010 |
| b | 0.70 | 0.93 | 0.028 | 0.037 |
| b2 | 1.14 | 1.70 | 0.045 | 0.067 |
| c | 0.38 | 0.69 | 0.015 | 0.027 |
| c2 | 1.19 | 1.36 | 0.047 | 0.053 |
| D | 8.60 | 9.35 | 0.339 | 0.368 |
| D1 | 6.90 | 8.00 | 0.272 | 0.311 |
| D2 | 1.10 | 1.50 | 0.043 | 0.060 |
| E | 10.00 | 10.55 | 0.394 | 0.415 |
| E1 | 8.10 | 8.90 | 0.319 | 0.346 |
| E2 | 6.85 | 7.25 | 0.266 | 0.282 |
| e | 2.54 typ. | | 0.100 | |
| e1 | 4.88 | 5.28 | 0.190 | 0.205 |
| H | 15.00 | 15.85 | 0.591 | 0.624 |
| J1 | 2.49 | 2.90 | 0.097 | 0.112 |
| L | 1.90 | 2.79 | 0.075 | 0.110 |
| L1 | 1.27 | 1.65 | 0.049 | 0.065 |
| L2 | 1.30 | 1.78 | 0.050 | 0.070 |
| R | 0.4 typ. | | 0.015 | |
| V2 | 0° | 8° | 0° | 8° |

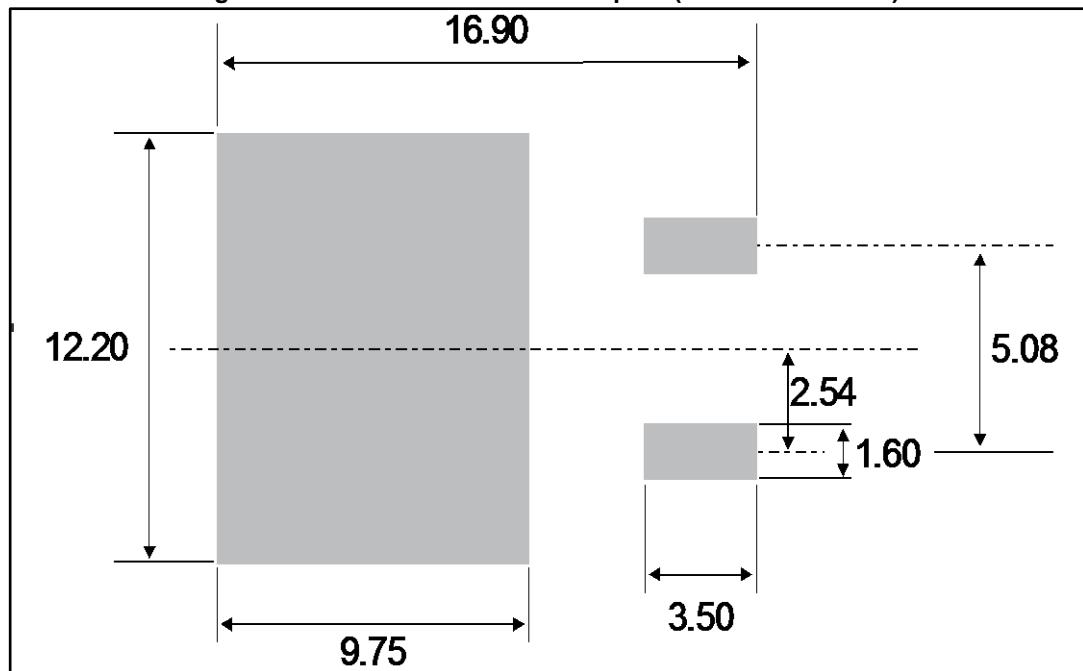Figure 15: D²PAK recommended footprint (dimensions in mm)

2.2 TO-220AC package information

Figure 16: TO-220AC package outline

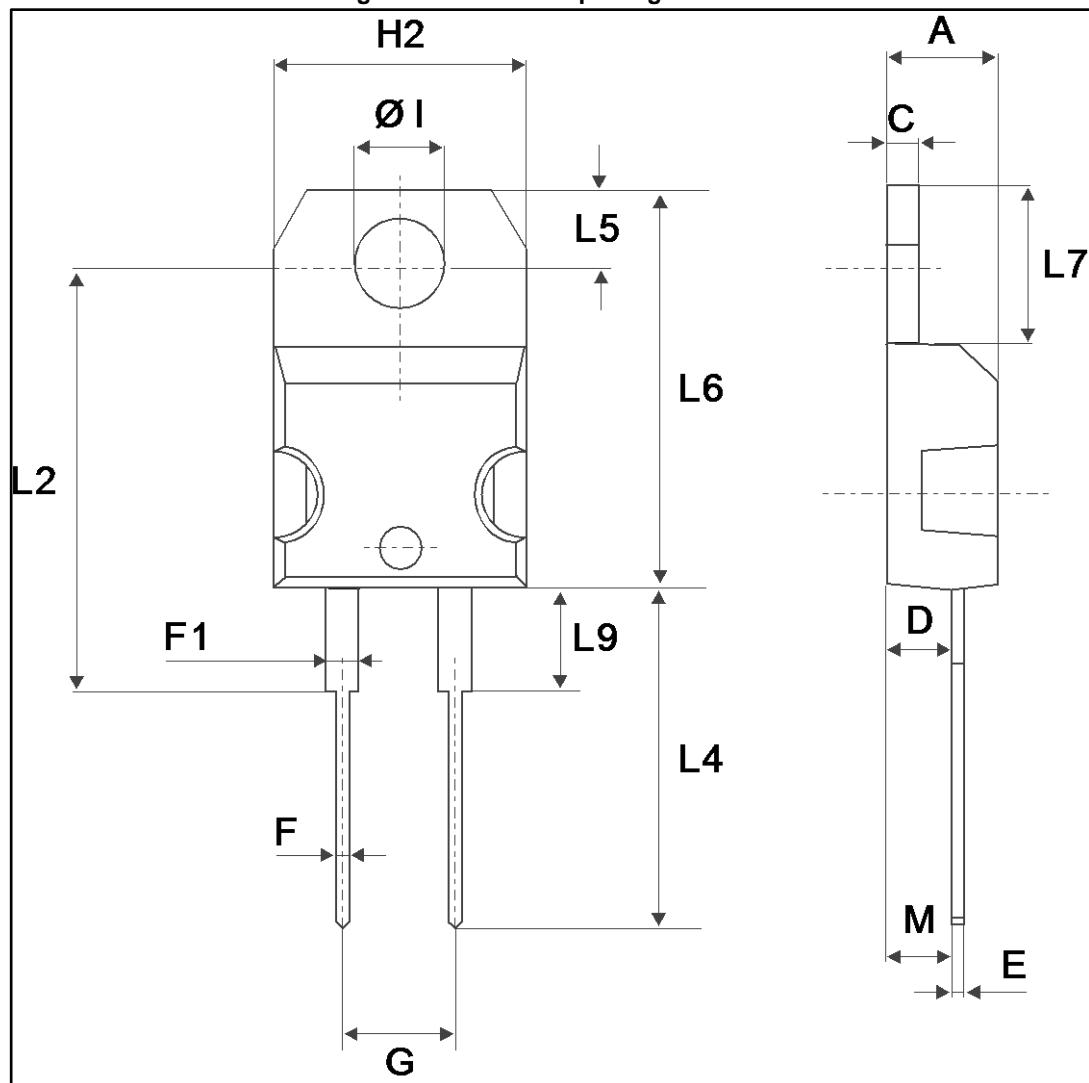


Table 7: TO-220AC package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|-------|------------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 4.40 | 4.60 | 0.173 | 0.181 |
| C | 1.23 | 1.32 | 0.048 | 0.051 |
| D | 2.40 | 2.72 | 0.094 | 0.107 |
| E | 0.49 | 0.70 | 0.019 | 0.027 |
| F | 0.61 | 0.88 | 0.024 | 0.034 |
| F1 | 1.14 | 1.70 | 0.044 | 0.066 |
| G | 4.95 | 5.15 | 0.194 | 0.202 |
| H2 | 10.00 | 10.40 | 0.393 | 0.409 |
| L2 | 16.40 typ. | | 0.645 typ. | |
| L4 | 13.00 | 14.00 | 0.511 | 0.551 |
| L5 | 2.65 | 2.95 | 0.104 | 0.116 |
| L6 | 15.25 | 15.75 | 0.600 | 0.620 |
| L7 | 6.20 | 6.60 | 0.244 | 0.259 |
| L9 | 3.50 | 3.93 | 0.137 | 0.154 |
| M | 2.6 typ. | | 0.102 typ. | |
| ØI | 3.75 | 3.85 | 0.147 | 0.151 |

2.3 TO-220FPAC package information

Figure 17: TO-220FPAC package outline

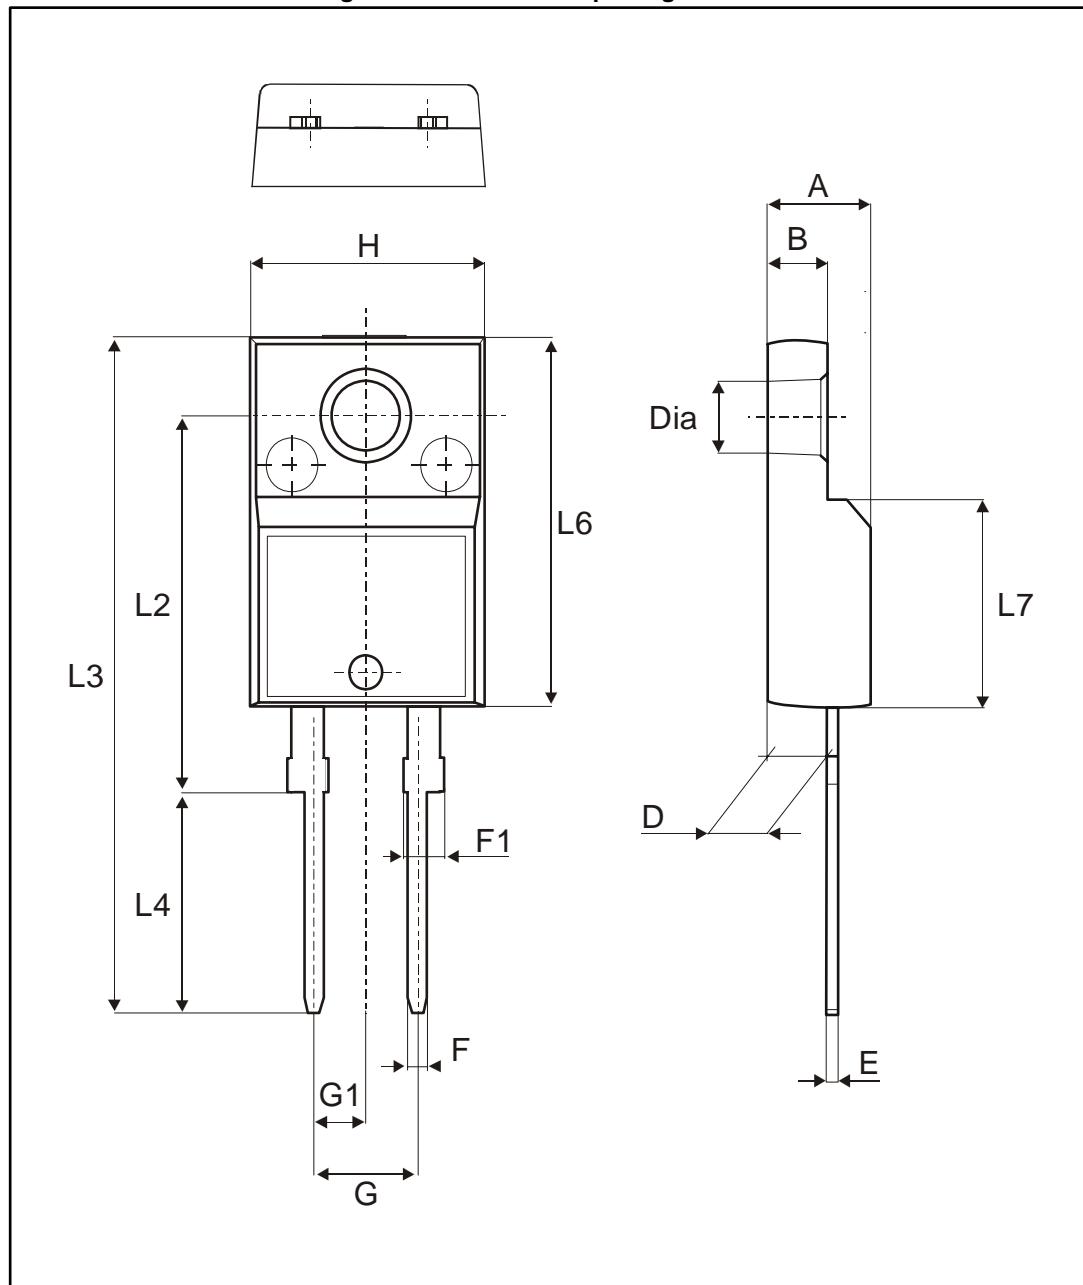


Table 8: TO-220FPAC package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|-------|------------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 4.40 | 4.60 | 0.173 | 0.181 |
| B | 2.50 | 2.70 | 0.098 | 0.106 |
| D | 2.50 | 2.75 | 0.098 | 0.108 |
| E | 0.45 | 0.70 | 0.018 | 0.027 |
| F | 0.75 | 1.00 | 0.030 | 0.039 |
| F1 | 1.15 | 1.70 | 0.045 | 0.067 |
| G | 4.95 | 5.20 | 0.195 | 0.205 |
| G1 | 2.40 | 2.70 | 0.094 | 0.106 |
| H | 10.00 | 10.40 | 0.393 | 0.409 |
| L2 | 16.00 typ. | | 0.630 typ. | |
| L3 | 28.60 | 30.60 | 0.126 | 1.205 |
| L4 | 9.80 | 10.60 | 0.386 | 0.417 |
| L6 | 15.90 | 16.40 | 0.626 | 0.646 |
| L7 | 9.00 | 9.30 | 0.354 | 0.366 |
| Dia. | 3.00 | 3.20 | 0.118 | 0.126 |

3 Ordering information

Table 9: Ordering information

| Order code | Marking | Package | Weight | Base qty. | Delivery mode |
|---------------|-------------|--------------------|--------|-----------|---------------|
| STTH20R04G-TR | STTH20R04G | D ² PAK | 1.38 g | 1000 | Tape and reel |
| STTH20R04FP | STTH20R04FP | TO-220FPAC | 1.90 g | 50 | Tube |
| STTH20R04D | STTH20R04D | TO-220AC | 1.87 g | 50 | Tube |

4 Revision history

Table 10: Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 08-Nov-2007 | 1 | First issue. |
| 16-Aug-2017 | 2 | Updated features and package silhouette. Updated Section 1: "Characteristics" , Section 1.1: "Characteristics (curves)" and Section 3: "Ordering information" . |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rectifiers category:

Click to view products by STMicroelectronics manufacturer:

Other Similar products are found below :

[D91A](#) [DA24F4100L](#) [DD89N1600K-A](#) [DD89N16K-K](#) [RL252-TP](#) [DSEI2X30-06C](#) [1N4005-TR](#) [BAV199-TP](#) [UFS120Je3/TR13](#)
[JANS1N6640US](#) [DD89N16K](#) [DD89N16K-A](#) [481235F](#) [067907F](#) [MS306](#) [ND104N08K](#) [SPA2003-B-D-A01](#) [US2JFL-TP](#) [UFS105Je3/TR13](#)
[A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#) [RF301B2STL](#) [RF501B2STL](#) [UES1306](#) [UES1302](#) [BAV199E6433HTMA1](#) [ACGRC307-HF](#)
[ACEFC304-HF](#) [JANTXV1N5660A](#) [UES1106](#) [GS2K-LTP](#) [D126A45C](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [STTH20P035FP](#)
[VS-8EWS12S-M3](#) [VS-12FL100S10](#) [ACGRA4001-HF](#) [MUR420GP-TP](#) [1N5404GP-E3/54](#) [ND89N08K](#) [D1821SH45T PR](#) [D1251S45T](#)
[JANTX1N3890](#) [SKN20/16](#) [SKN70/16](#)