


Turbo 2 ultrafast high voltage rectifier

Datasheet - production data

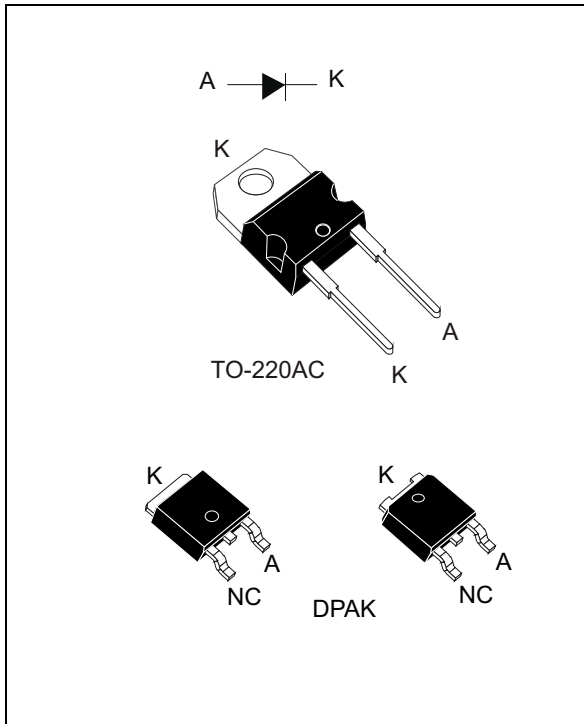

Description

The STTH506 is developed using ST's Turbo 2 600 V technology. It is well-suited for use in switching power supplies and industrial applications.

Table 1. Device summary

| Symbol | Value |
|----------------|--------|
| $I_{F(AV)}$ | 5 A |
| V_{RRM} | 600 V |
| $t_{rr} (max)$ | 30 ns |
| $T_j (max)$ | 175 °C |
| $V_F (typ)$ | 1.1 V |

Features

- Ultrafast switching
- Low reverse current
- Low thermal resistance
- Reduces conduction and switching losses
- ECOPACK[®]2 compliant component for DPAK on demand

1 Characteristics

Table 2. Absolute ratings (limiting values at 25° C, unless otherwise specified)

| Symbol | Parameter | | Value | Unit | |
|--------------|---|------------------------------------|------------------|------|---|
| V_{RRM} | Repetitive peak reverse voltage | | 600 | V | |
| $I_{F(RMS)}$ | RMS forward current | TO-220AC | 20 | A | |
| | | DPAK | 10 | A | |
| $I_{F(AV)}$ | Average forward current, $\delta = 0.5$, square wave. | $T_C = 145^\circ\text{C}$ | TO-220AC DPAK | 5 | A |
| I_{FSM} | Surge non repetitive forward current | $t_p = 10\text{ ms}$ Sinusoidal | TO-220AC | 70 | A |
| | | | DPAK | 55 | A |
| T_{stg} | Storage temperature range | | -65 to +175 | °C | |
| T_j | Maximum operating junction temperature | | 175 | °C | |

Table 3. Thermal parameters

| Symbol | Parameter | Max. value | Unit |
|---------------|------------------|------------|------|
| $R_{th(j-c)}$ | Junction to case | 3.5 | °C/W |

Table 4. Static electrical characteristics

| Symbol | Parameter | Test conditions | | Min. | Typ | Max. | Unit |
|-------------|-------------------------|---------------------------|--------------------|------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25^\circ\text{C}$ | $V_R = V_{RRM}$ | - | | 5 | μA |
| | | $T_j = 150^\circ\text{C}$ | | - | 13 | 130 | |
| $V_F^{(2)}$ | Forward voltage drop | $T_j = 25^\circ\text{C}$ | $I_F = 5\text{ A}$ | - | | 1.85 | V |
| | | $T_j = 150^\circ\text{C}$ | | - | 1.10 | 1.40 | |

1. Pulse test: $t_p = 5\text{ ms}$, $\delta < 2\%$

2. Pulse test: $t_p = 380\ \mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses, use the following equation:

$$P = 1.07 \times I_{F(AV)} + 0.066 \times I_{F(RMS)}^2$$

Table 5. Dynamic characteristics

| Symbol | Parameter | Test conditions | | Min. | Typ | Max. | Unit |
|----------|--------------------------|----------------------------|--|------|-----|------|------|
| t_{rr} | Reverse recovery time | $T_j = 25^\circ \text{C}$ | $I_F = 0.5 \text{ A}$ $I_{rr} = 0.25 \text{ A}$ $I_R = 1 \text{ A}$ | - | | 30 | ns |
| | | | $I_F = 1 \text{ A}$ $V_R = 30 \text{ V}$ $di_F/dt = -50 \text{ A}/\mu\text{s}$ | - | 35 | 50 | |
| I_{RM} | Reverse recovery current | $T_j = 125^\circ \text{C}$ | $I_F = 5 \text{ A}$ $V_R = 400 \text{ V}$ $di_F/dt = -100 \text{ A}/\mu\text{s}$ | - | 3.5 | 5 | A |
| Q_{rr} | Reverse recovery charges | | | - | 175 | | nC |
| t_{fr} | Forward recovery time | $T_j = 25^\circ \text{C}$ | $I_F = 5 \text{ A}$ $V_{FR} = 1.1 \times V_{Fmax}$ $di_F/dt = 100 \text{ A}/\mu\text{s}$ | - | | 180 | ns |
| V_{FP} | Forward recovery voltage | | | - | 4 | | V |

Figure 1. Conduction losses versus average current

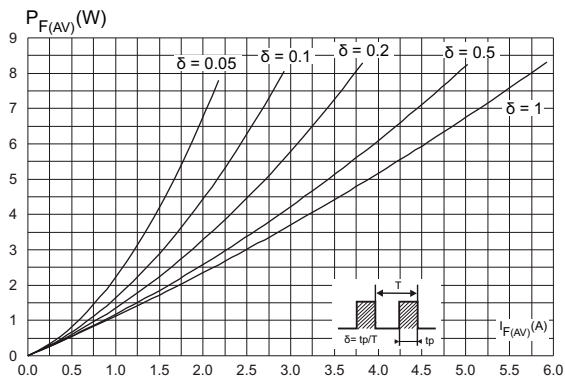


Figure 2. Forward voltage drop versus forward current

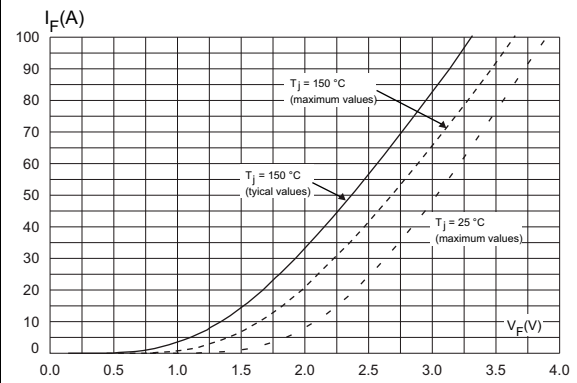


Figure 3. Relative variation of thermal impedance junction to case versus pulse duration

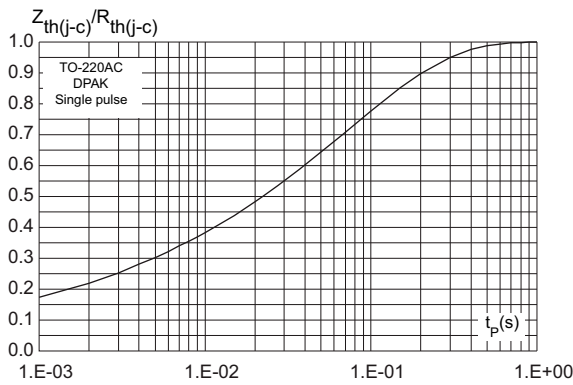


Figure 4. Peak reverse recovery current versus di_F/dt (typical values)

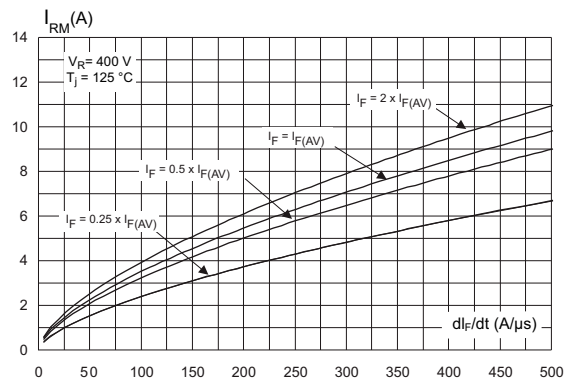


Figure 5. Reverse recovery time versus di_F/dt (typical values)

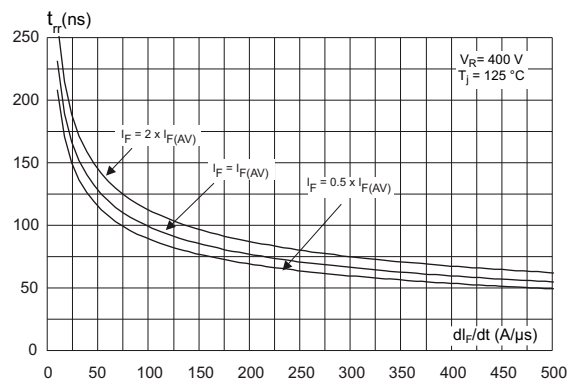


Figure 6. Reverse recovery charges versus di_F/dt (typical values)

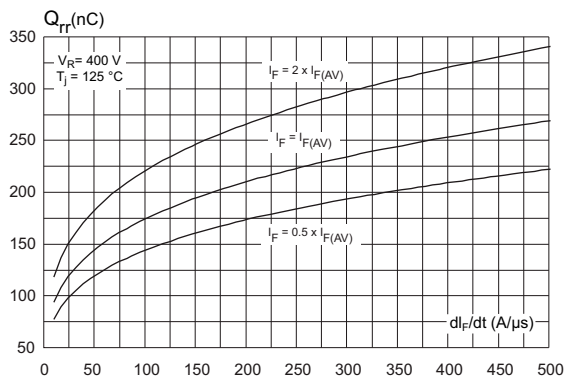


Figure 7. Softness factor versus di_F/dt (typical values)

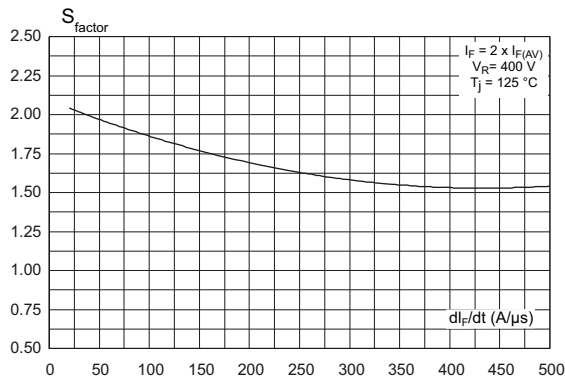


Figure 8. Relative variations of dynamic parameters versus junction temperature

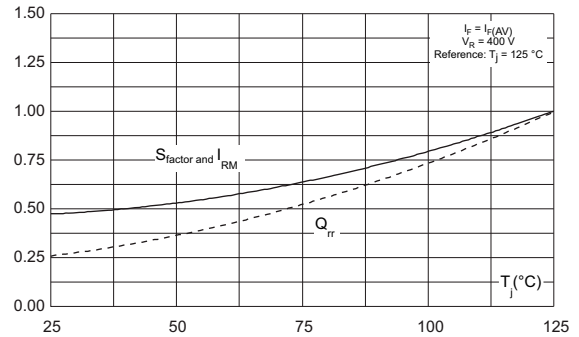


Figure 9. Transient peak forward voltage versus di_F/dt (typical values)

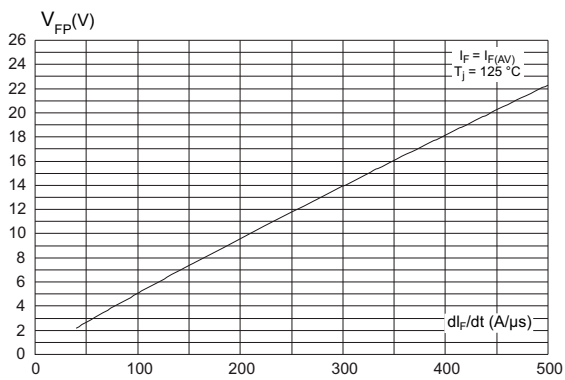


Figure 10. Forward recovery time versus di_F/dt (typical values)

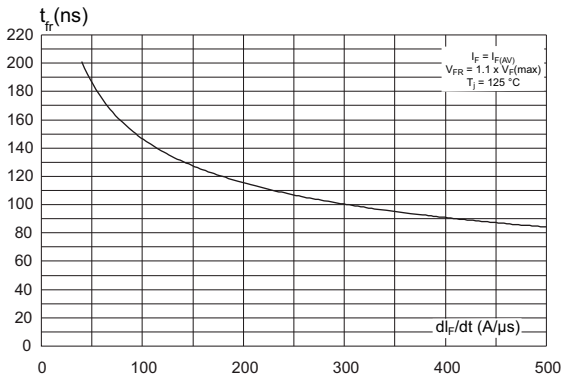


Figure 11. Junction capacitance versus reverse voltage applied (typical values)


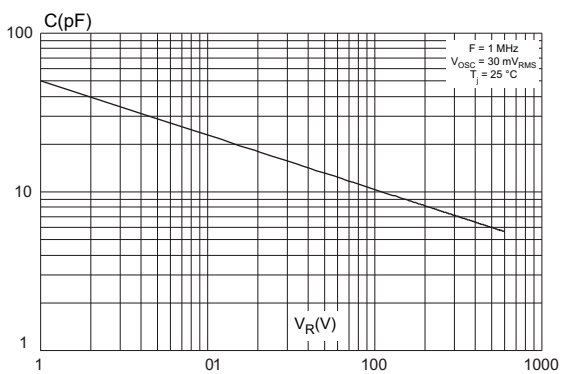


Figure 12. Thermal resistance junction to ambient versus copper surface under tab

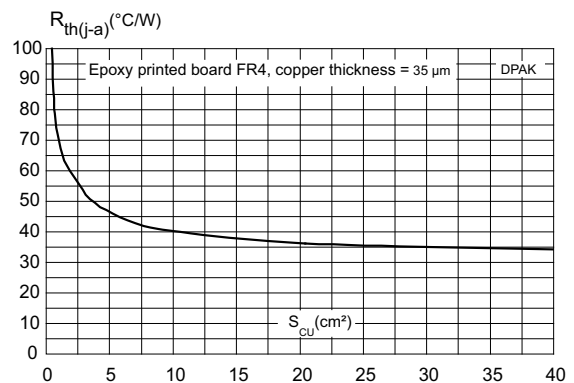


2 Package Information

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.55 Nm for TO-220AC
- Maximum torque value: 0.7 Nm for TO-220AC

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

2.1 DPAK package information

Figure 13. DPAK package outline

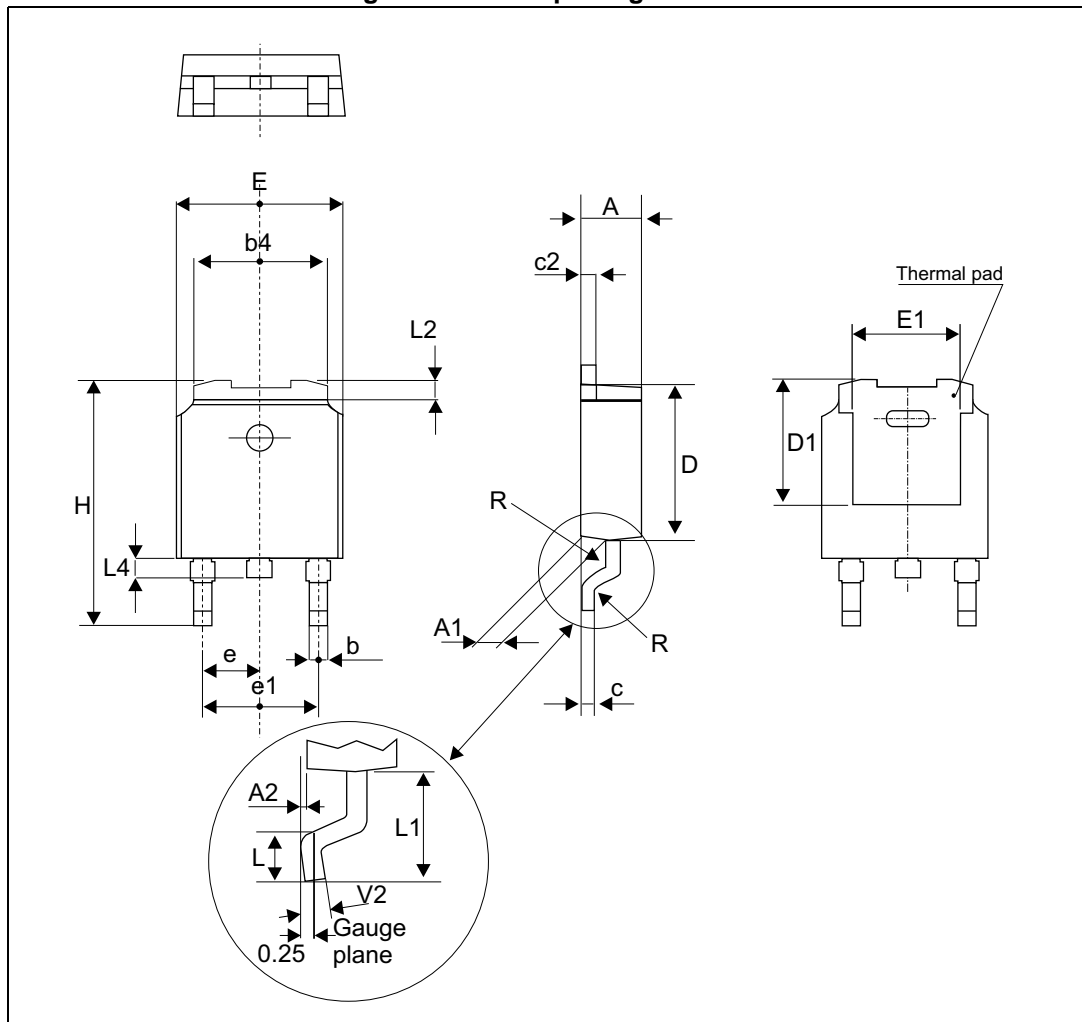


Note: This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

Table 6. DPAK package mechanical data

| Ref. | Dimensions | | | | | |
|------|-------------|------|-------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 2.18 | | 2.40 | 0.085 | | 0.094 |
| A1 | 0.90 | | 1.10 | 0.035 | | 0.043 |
| A2 | 0.03 | | 0.23 | 0.001 | | 0.009 |
| b | 0.64 | | 0.90 | 0.025 | | 0.035 |
| b4 | 4.95 | | 5.46 | 0.194 | | 0.214 |
| c | 0.46 | | 0.61 | 0.018 | | 0.024 |
| c2 | 0.46 | | 0.60 | 0.018 | | 0.023 |
| D | 5.97 | | 6.22 | 0.235 | | 0.244 |
| D1 | 4.95 | | 5.60 | 0.194 | | 0.220 |
| E | 6.35 | | 6.73 | 0.250 | | 0.264 |
| E1 | 4.32 | | 5.50 | 0.170 | | 0.216 |
| e | | 2.28 | | | 0.090 | |
| e1 | 4.40 | | 4.70 | 0.173 | | 0.185 |
| H | 9.35 | | 10.40 | 0.368 | | 0.409 |
| L | 1.00 | | 1.78 | 0.039 | | 0.070 |
| L2 | | | 1.27 | | | 0.050 |
| L4 | 0.60 | | 1.02 | 0.023 | | 0.040 |
| V2 | -8° | | +8° | -8° | | 8° |

Figure 14. Footprint (dimensions in mm)

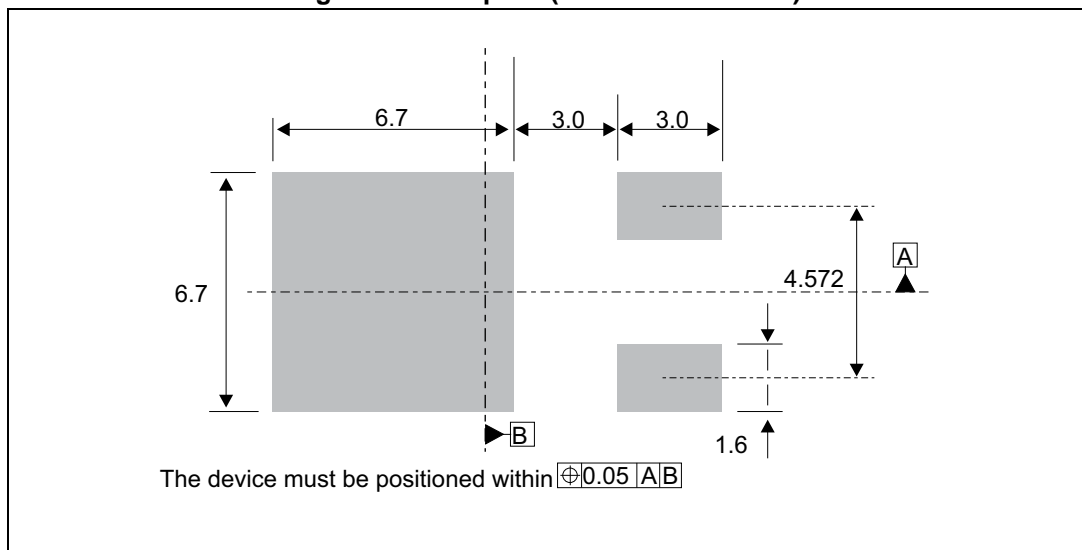

2.2 TO-220AC package information

Figure 15. TO-220AC package outline

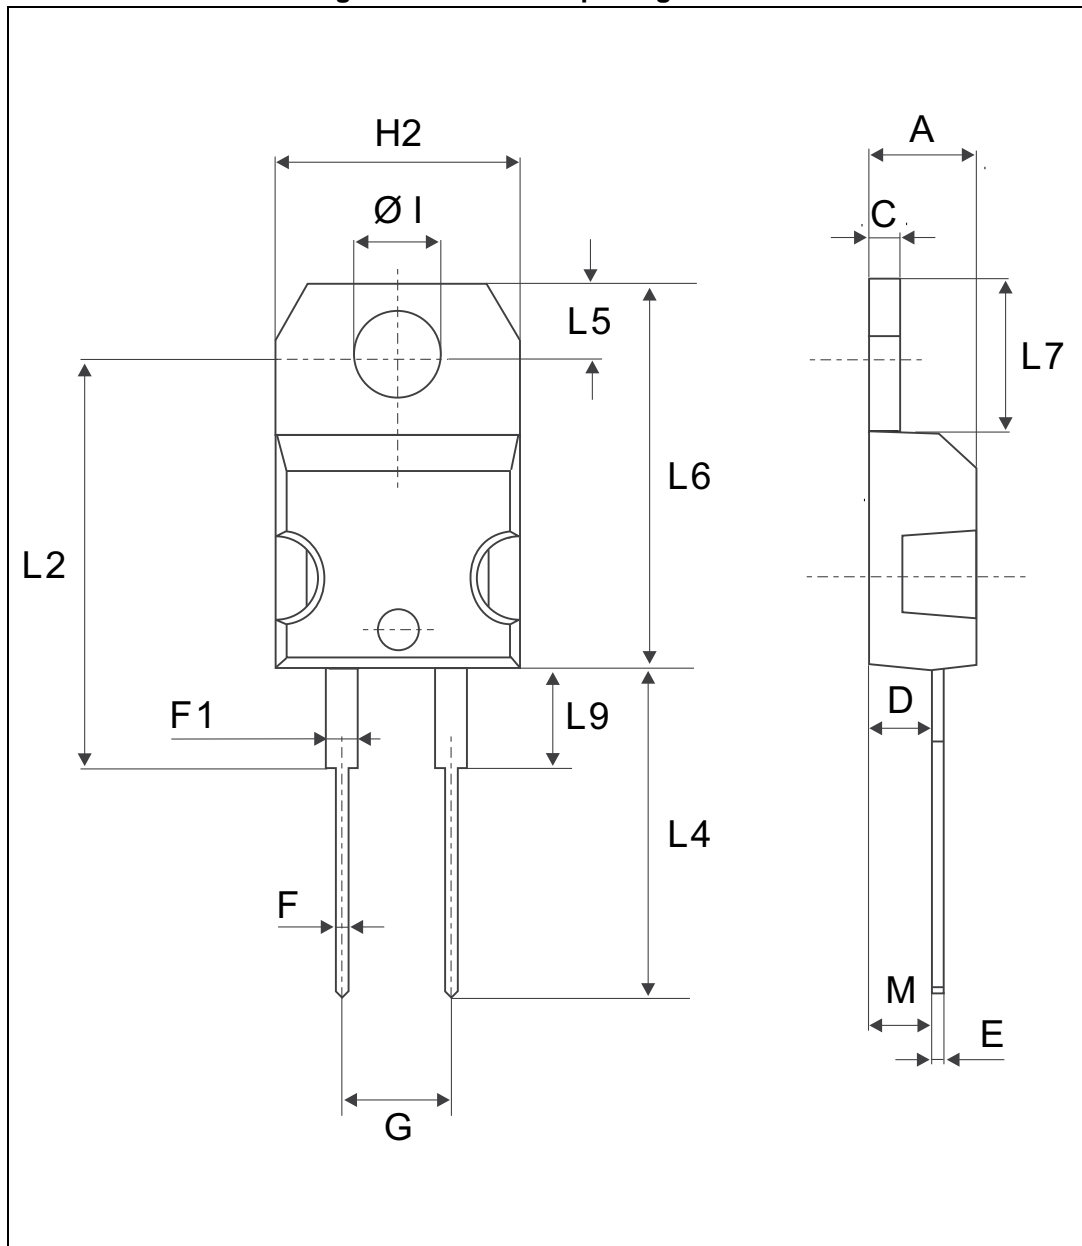


Table 7. TO-220AC package mechanical data

| Ref. | Dimensions | | | | | |
|---------|-------------|------------|-------|--------|------------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 4.40 | | 4.60 | 0.173 | | 0.181 |
| C | 1.23 | | 1.32 | 0.048 | | 0.051 |
| D | 2.40 | | 2.72 | 0.094 | | 0.107 |
| E | 0.49 | | 0.70 | 0.019 | | 0.027 |
| F | 0.61 | | 0.88 | 0.024 | | 0.034 |
| F1 | 1.14 | | 1.70 | 0.044 | | 0.066 |
| G | 4.95 | | 5.15 | 0.194 | | 0.202 |
| H2 | 10.00 | | 10.40 | 0.393 | | 0.409 |
| L2 | | 16.40 typ. | | | 0.645 typ. | |
| L4 | 13.00 | | 14.00 | 0.511 | | 0.551 |
| L5 | 2.65 | | 2.95 | 0.104 | | 0.116 |
| L6 | 15.25 | | 15.75 | 0.600 | | 0.620 |
| L7 | 6.20 | | 6.60 | 0.244 | | 0.259 |
| L9 | 3.50 | | 3.93 | 0.137 | | 0.154 |
| M | | 2.6 typ. | | | 0.102 typ. | |
| Diam. I | 3.75 | | 3.85 | 0.147 | | 0.151 |

3 Ordering Information

Table 8. Ordering information

| Order code | Marking | Package | Weight | Base qty | Delivery mode |
|-------------|-----------|----------|--------|----------|---------------|
| STTH506B-TR | STTH 506B | DPAK | 0.30 g | 2500 | Tape and reel |
| STTH506B | STTH 506B | DPAK | 0.30 g | 75 | Tube |
| STTH506D | STTH506D | TO-220AC | 1.86 g | 50 | Tube |

4 Revision history

Table 9. Document revision history

| Date | Revision | Description of Changes |
|-------------|----------|---|
| 14-Oct-2008 | 1 | First issue. |
| 08-Aug-2014 | 2 | Updated DPAK package information and removed TO-220AB package. |
| 26-Nov-2014 | 3 | Updated Figure 13 and Figure 14. |
| 03-Nov-2016 | 4 | Updated DPAK package information and reformatted to current standard. |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [STMicroelectronics](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#) [ACGRA4007-HF](#)
[ACGRB207-HF](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#)
[85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [VS-](#)
[12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#) [NTE6162](#) [NTE5850](#)