

Robust, attack resistant keypads for use in the most exposed and hostile public environments

- Rugged, reliable and responsive data entry
- Vandal resistant (20J BS EN 60068-2-75: 1997)
- Weather, water and dust resistant (IP65)
- · All metal keytops and casing
- 4 key, 12 key and 16 key formats

- Permanent, high contrast, engraved keytop graphics
- Raised "home pip" on the "5" key
- Simple 'row and column' circuit matrix, terminated by a male, goldplated, square pin, 0.1" (2.54mm) pitch connector with locking ramp
- Can be fixed to a flat surface or under panel mounted for a flush, low profile installation










1000 Series vandal resistant keypads

A series of attack resistant keypads for use in the most hostile public environments. Designed and constructed to ensure rapid and reliable data entry in the most challenging applications, the Storm 1000 Series keypads are field proven and lab tested to survive hard use, abuse and vandalism. Ideal for use in a wide range of industrial, commercial and public applications.

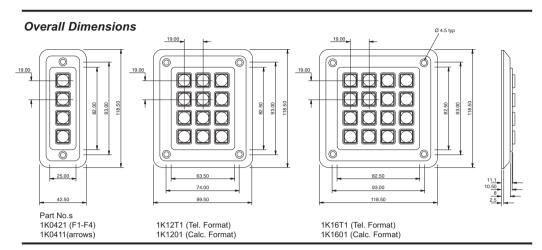



Connection Details for 4 Key Keypad

CONTACT CONNECTIONS

KEY LOCATION ed from front of keypad)

Countersunk Fixing Screws (Not Supplied)

Sealing Gasket

CONTACT MATRIX COLLIMN common

Connection Details for 12 Key Keypad

CONTACT CONNECTIONS	CC
• • • • • • •	
8 7 6 5 4 3 2 1	
(As viewed from rear of keypad)	Г
A 1 2 3	
₅ĦĦĦ	
cHHH.	
JAHH	
	г


d	MATRIX		
	CONNEC. PIN	ROW/ COLUMN	
	1	А	
ad)	2	В	
	3	1	
	4	2	
	5	3	
	6	-	
	7	D	
ad)	8	С	


Connection Details for 16 Key Keypad

COI	NTA						ONS	6
•	•	•	•	•	•	•	•]
(As	7 vie	6 wed	5 d fn	4 om	3 rea	2 ar o	1 f ke	3)
Α	1	2][3	4]		
В	╝	L	ŢĒ	╝	L	_		

CONTACT MATRIX		
CONNEC. PIN	ROW/ COLUMN	
1	Α	
2	В	
3	1	
4	2	
5	3	
6	4	
7	D	
8	С	

Mounting & Connection Details

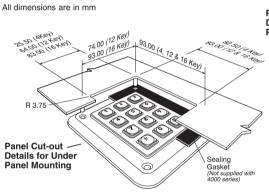



Electrical

Contact Bounce	5ms (max)
Contact Resistance	100 ohms (max)
Insulation Resistance	50 Mohms (min)
Breakdown Voltage	500V AC (max 60 secs.)
Operating Voltage	24V DC (max)
Operating Current	50mA (max)

Mechanical

Operational Life	4 million cycles (min) per key
Keytop Travel	1.4mm nominal
Actuation Force	180gms nominal
Connector	0.1" pitch, gold plated square pin,
	male connector with locking ramp

Environmental

Water / Dust Sealed	IP65 (when mounted to suitable enclosure)
Operational Temperature	-40°C to +100°C (Dry)
Impact	20 Joules via 50mm
	Ø steel impactor

Material

Chromed die-cast zinc
Chromed die-cast zinc
Engraved
Gold on Nickel plated FR4

Accessories Stock No. Notes PC Interface 4200-00[x] RS232 **Rear Casing** RC12020[x] Supplied complete with fixing hardware, Providing space for additional components sealing gaskets and fixing instructions. or circuitry (12 key formats only) Blank Keytops 1K0000[x] Supplied without keytop graphics. Suitable for engraving. **Privacy Shield** 1KFS020[x] Supplied complete with fixing hardware, Provides PIN / Entry Code security sealing gaskets and fixing instructions. 12 key only.

Whilst every effort is made to ensure details are correct at time of print, specifications are subject to change without notice.







Storm Interface products include technology protected by international patents and design registration. All rights reserved.

www.storm-interface.com

1000-LIT-01 Rev 4 Nov 2008

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Input Devices category:

Click to view products by Storm Interface manufacturer:

Other Similar products are found below:

80260-00 81485-28 81521-08 FKB4720-103 84250-26 84980-04 84S-AC1-000 JD-0700EU-2 JM-0800-2 JW-T0100 89498-13 89758-05 89886-26 89941-00 G80-3000LSCEU-2 MJ0FGGRY JM-0800-0 84S-BB1-004 81601-26 UL21KMZQ G8011900LPMUS0 G84-4700LUCUS-0 81485-26 84105-13 V400-W24 5M V400-W23 5M G84-5200LCMEU-2 DT2257X20V00GRY 84Z2029-78 84Z2029-79 V400-W23P 5M VW3A8151R20U V400-W24 15M LT1332D V400-W24 10M V400-W24P 15M V400-W00 1M V400-W24P 10M V400-W23P 10M TCS-14920P V400-W23 3M LT1372D LP1007EXXH00R DT2253X20V00BLK 100133BX EZ08-230013 81248-04 89887-26 90215-00 HB110C3NWBNA